


LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			D	REVISED PER ECO-14-011808	09AUG2014	AP	SB

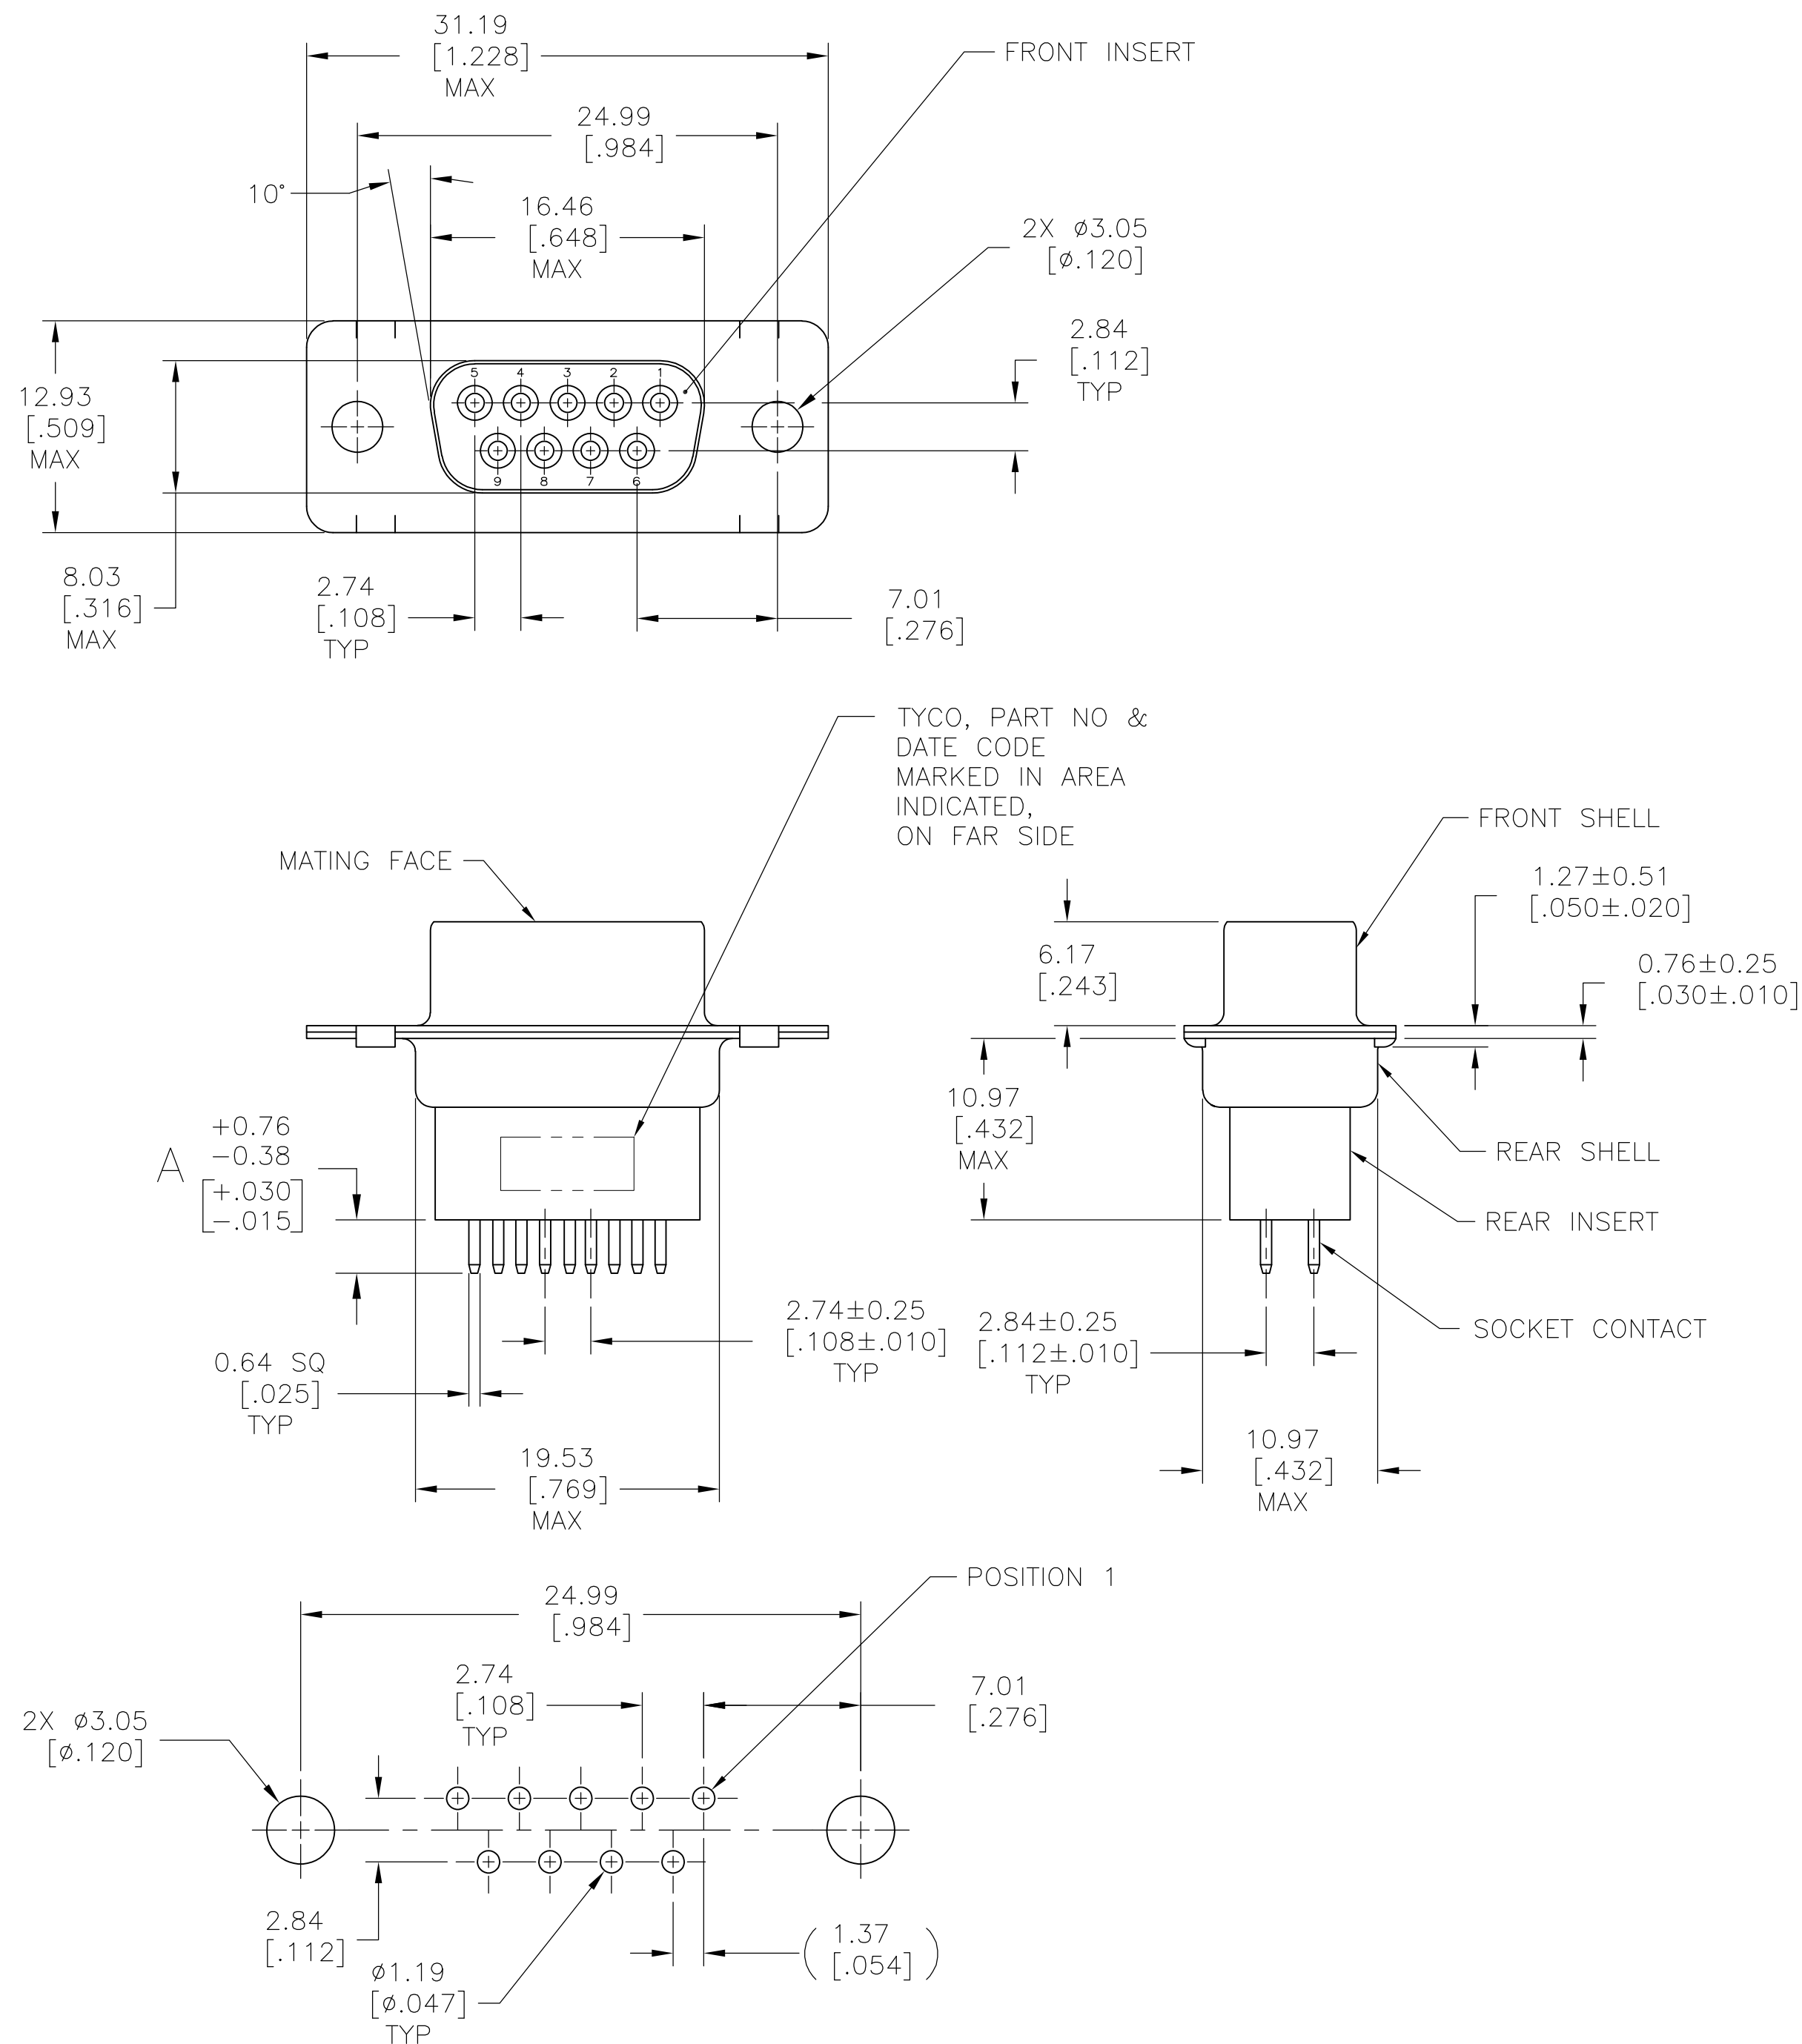


P.C. BOARD MOUNTING DIMENSIONS

- 1 MOLDED PARTS: GLASS-FILLED PBT OR GLASS-FILLED NYLON, UL94V-0 RATED.
COLOR: BLACK
SHELLS: CARBON STEEL.
CONTACTS: PHOS BRONZE.

2 SHELLS: 5.08μm [.000200] MIN ZINC WITH YELLOW CHROMATE COATING.
CONTACTS: GOLD FLASH PLATED FOR LENGTH OF 3.81[.150] MIN FROM MATING END,
2.54μm [.000100] MIN TIN ON SOLDER END, BOTH OVER
1.27μm [.000050] MIN NICKEL.

3 SHELLS: 5.08μm [.000200] MIN ZINC WITH YELLOW CHROMATE COATING.
CONTACTS: GOLD PLATED FOR LENGTH OF 3.81[.150] MIN FROM MATING END,
0.76μm [.000030] MIN GOLD IN MATED AREA,
2.54μm [.000100] MIN TIN ON SOLDER END, BOTH OVER
1.27μm [.000050] MIN NICKEL.
OR
GOLD FLASH OVER PALLADIUM-NICKEL PLATED FOR LENGTH OF
3.81 [.150] MIN FROM MATING END,
0.76μm [.000030] MIN TOTAL IN MATED AREA,
2.54μm [.000100] MIN TIN ON SOLDER END, BOTH OVER
1.27μm [.000050] MIN NICKEL.

	4.78 [.188]	5205734-7
	16.54 [.651]	5205734-5
	10.85 [.427]	5205734-4
	3.18 [.125]	5205734-1
GOLD FINISH	A	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. LATTUCA		02SEP05		 TE Connectivity	
		CHK S. BOLASH		02SEP05			
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. WALMSLEY		NAME	
		0 PLC ± -		PRODUCT SPEC		RECEPTACLE ASSEMBLY, SIZE 1, 9 POSN, VERTICAL, AMPLIMITE HDP -	
		1 PLC ± -		108-40025			
		2 PLC ± -		APPLICATION SPEC			
		3 PLC ± .005		114-40013			
4 PLC ± -		ANGLES ± -		WEIGHT -		SIZE	
MATERIAL		FINISH		A2		CAGE CODE	
				C-5205734		DRAWING NO	
CUSTOMER DRAWING						RESTRICTED TO	
						-	
SCALE						N.TS	
SHEET						1 OF 1	
REV						D	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5205734-5](#)