


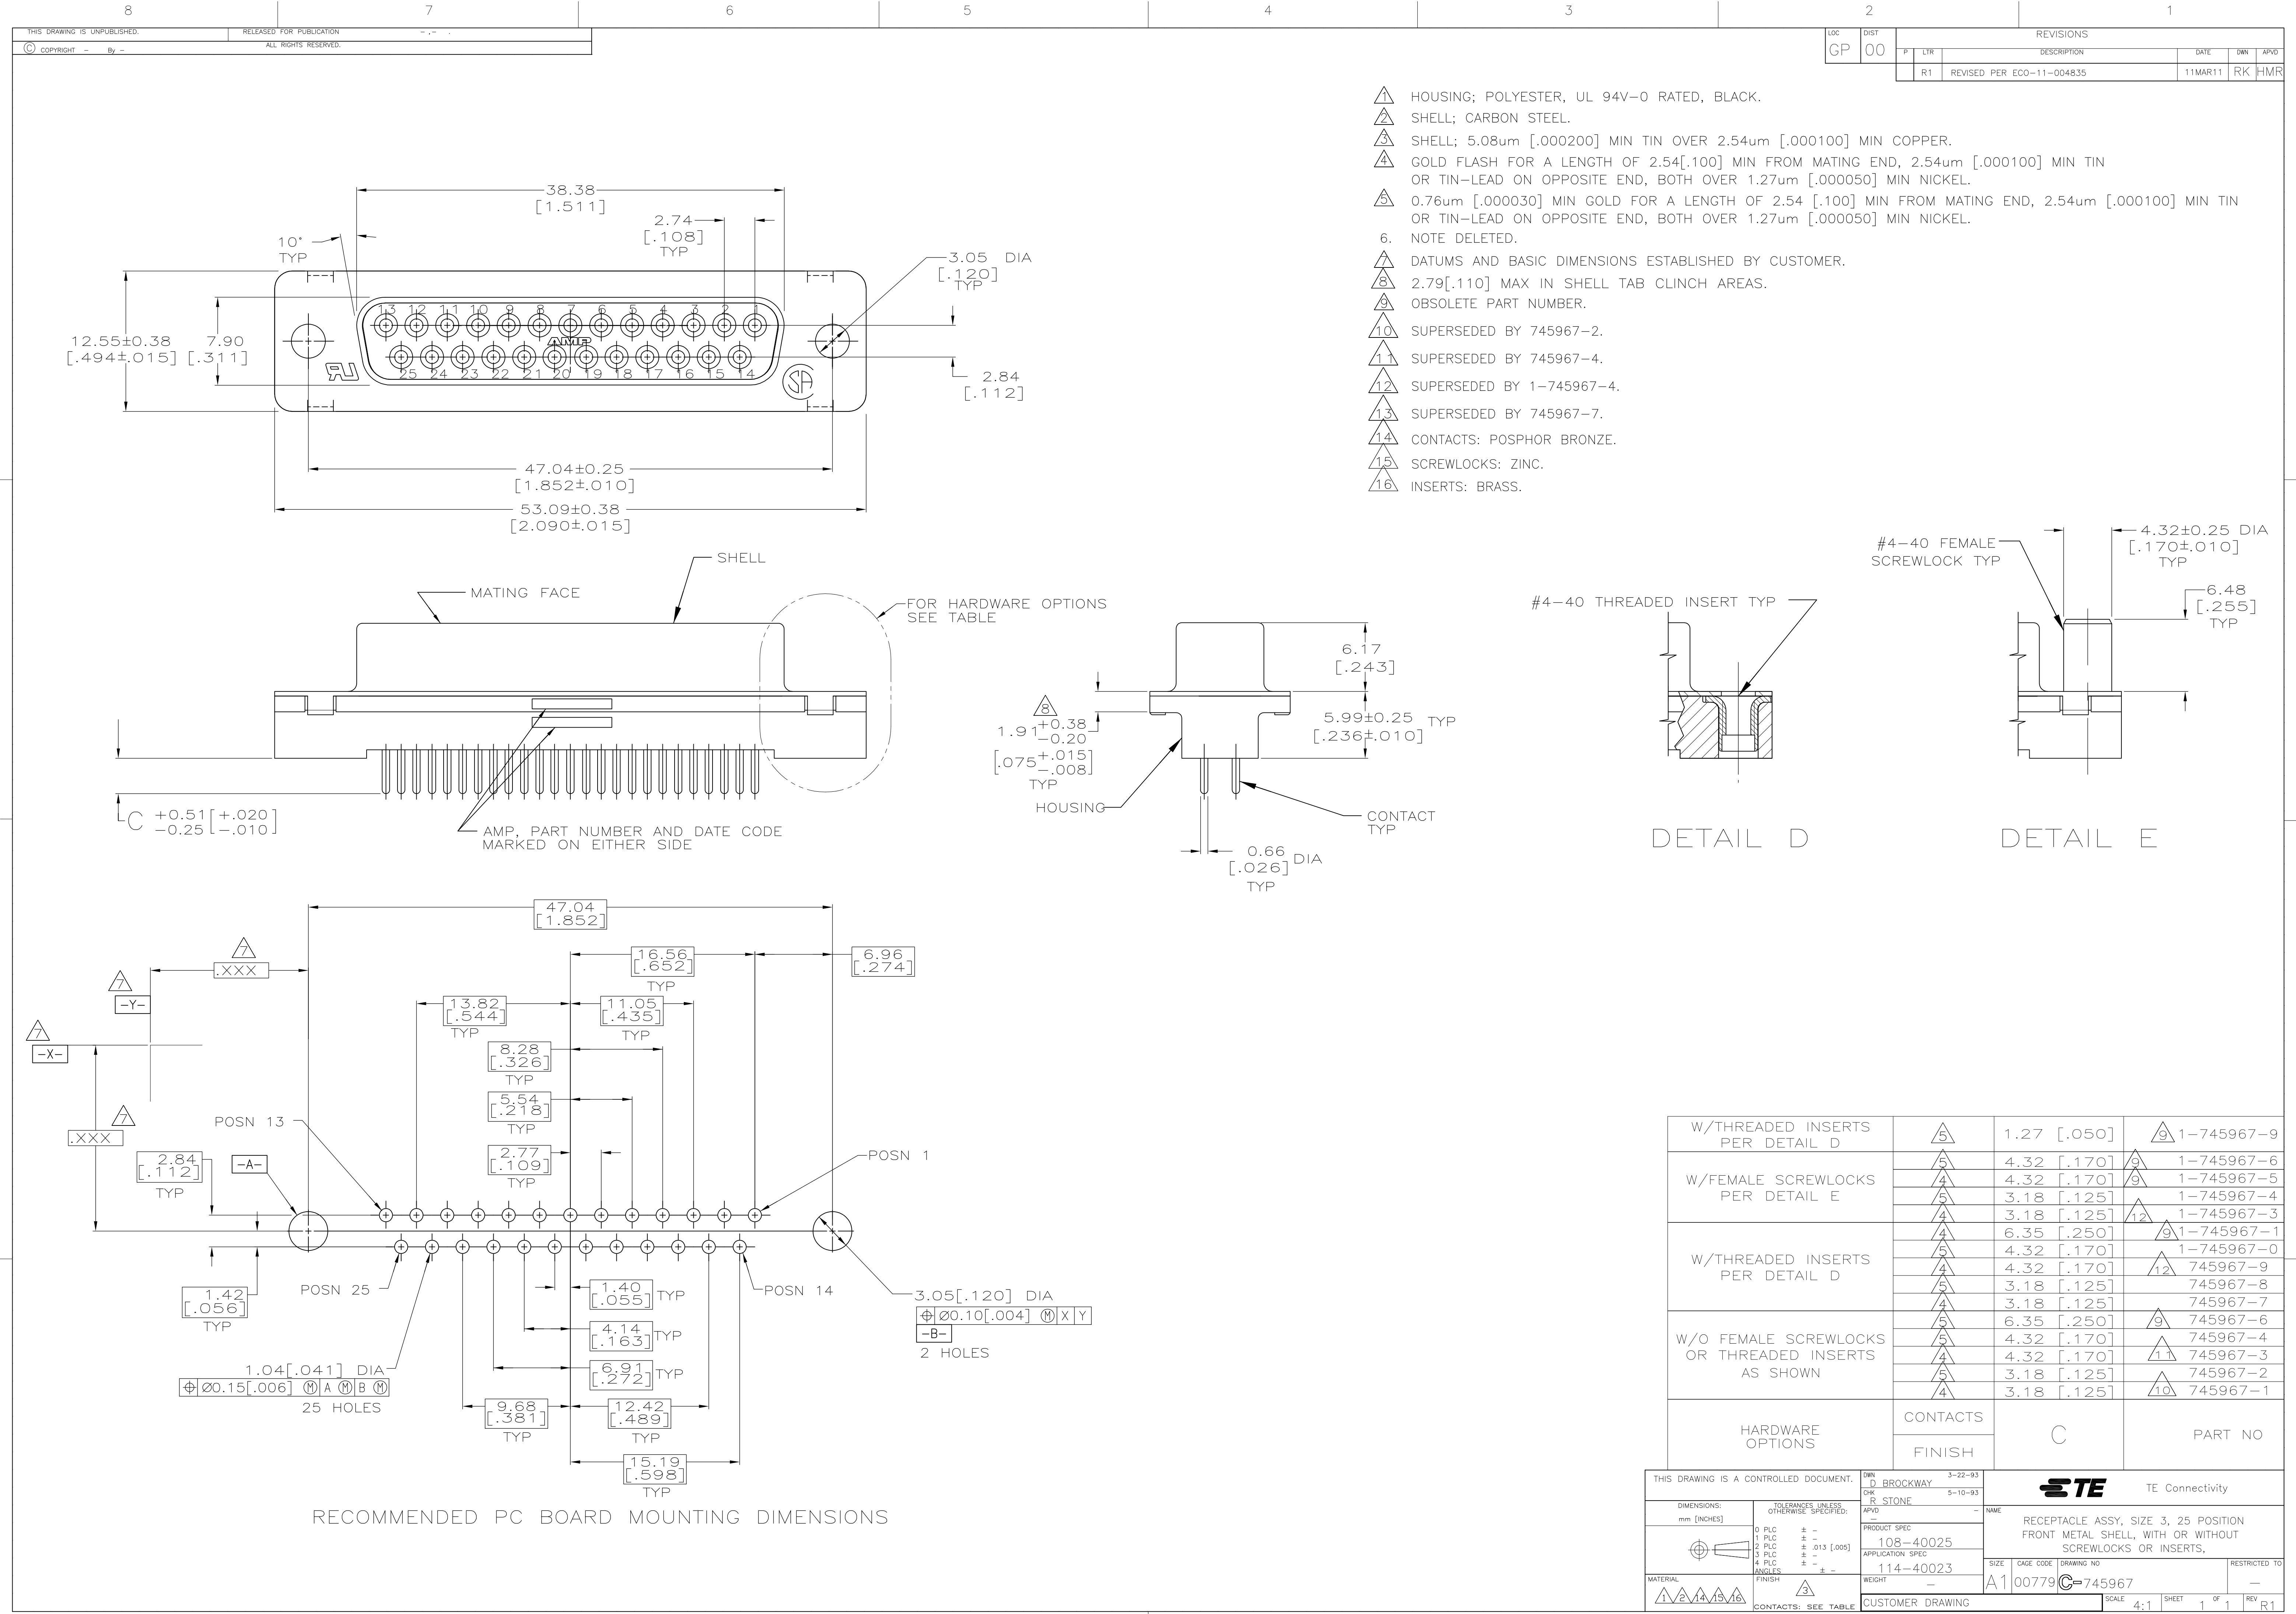

- 1 HOUSING; POLYESTER, UL 94V-0 RATED, BLACK.
- 2 SHELL; CARBON STEEL.
- 3 SHELL; 5.08um [.000200] MIN TIN OVER 2.54um [.000100] MIN COPPER.
- 4 GOLD FLASH FOR A LENGTH OF 2.54[.100] MIN FROM MATING END, 2.54um [.000100] MIN TIN OR TIN-LEAD ON OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.
- 5 0.76um [.000030] MIN GOLD FOR A LENGTH OF 2.54 [.100] MIN FROM MATING END, 2.54um [.000100] MIN TIN OR TIN-LEAD ON OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.
- 6 NOTE DELETED.
- 7 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 8 2.79[.110] MAX IN SHELL TAB CLINCH AREAS.
- 9 OBSOLETE PART NUMBER.
- 10 SUPERSEDED BY 745967-2.
- 11 SUPERSEDED BY 745967-4.
- 12 SUPERSEDED BY 1-745967-4.
- 13 SUPERSEDED BY 745967-7.
- 14 CONTACTS: POSPHOR BRONZE.
- 15 SCREWLOCKS: ZINC.
- 16 INSERTS: BRASS.

REVISIONS			
LOC	DIST	DESCRIPTION	DATE
GP	00	R1	REVISED PER ECO-11-004835
		DATE	DWN
		11MAR11	RK
		APVD	HMR

W/THEADED INSERTS PER DETAIL D		5	1.27 [.050]	9	1-745967-9
W/FEMALE SCREWLOCKS PER DETAIL E		5	4.32 [.170]	9	1-745967-6
		4	4.32 [.170]	9	1-745967-5
		5	3.18 [.125]		1-745967-4
		4	3.18 [.125]	12	1-745967-3
W/THEADED INSERTS PER DETAIL D		4	6.35 [.250]	9	1-745967-1
		5	4.32 [.170]		1-745967-0
		4	4.32 [.170]	12	745967-9
		5	3.18 [.125]		745967-8
W/O FEMALE SCREWLOCKS OR THEADED INSERTS AS SHOWN		4	3.18 [.125]		745967-7
		5	6.35 [.250]	9	745967-6
		5	4.32 [.170]		745967-4
		4	4.32 [.170]	11	745967-3
HARDWARE OPTIONS		5	3.18 [.125]		745967-2
		4	3.18 [.125]	10	745967-1
CONTACTS		C		PART NO	
FINISH					

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	3-22-93	TE Connectivity	
		CHK	5-10-93		
		APVD			
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ± -		PRODUCT SPEC	
		1 PLC ± -		108-40025	
		2 PLC ± .013 [.005]		APPLICATION SPEC	
		3 PLC ± -		114-40023	
		4 PLC ± -		SIZE	
		ANGLES ± -		CAGE CODE	
MATERIAL		FINISH		DRAWING NO	
		3		A1 00779	
		CONTACTS: SEE TABLE		RESTRICTED TO	
				A1 00779	
				CUSTOMER DRAWING	
				SCALE	
				4:1	
				SHEET	
				1 OF 1	
				REV	
				R1	

RECOMMENDED PC BOARD MOUNTING DIMENSIONS

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[745967-7](#)