


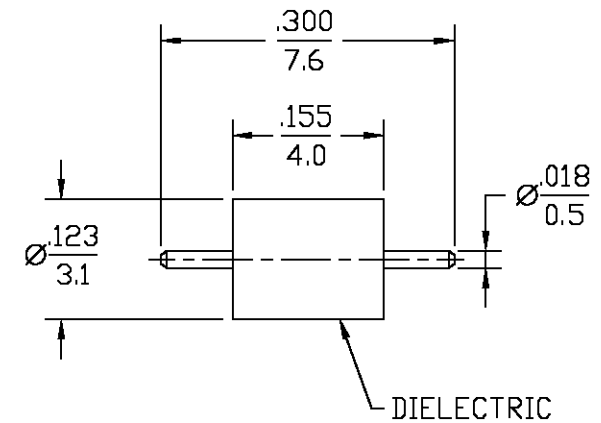

HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	PASSIVATE PER QQ-P-35
DIELECTRIC	PTFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
CONTACT EXT.	BRASS PER ASTM-B-16, HALF HARD	GOLD PLATE PER MIL-G-45204
GASKET	CONDUCTIVE SILVER/ SILICONE ELASTOMERS	N/A
O-RING	FLOUROSILICONE PER MIL-R- 25988, CLASS I, TYPE I.	N/A
COMPONENT	MATERIAL	FINISH
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON FRAC. DEC. ANGLES ± 1/64 ± .005 ± 1°	DRAWN BY KYLE LE CHECKED BY APP'D BY <i>PCW</i> DATE 6-30-97 9/30/97	AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599
These drawings and specifications are the property of Omni Spectra Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.	USE ASS'Y PROCEDURE N/A NO. A.P. _____	TITLE OSP 2-HOLE FLANGE MOUNT PLUG RECEPTACLE WITH EMI-RFI GASKET
	SIZE B	CORE IDENT NO. 26805
	SCALE 4:1	REV 01
		4551-3203-02
		SHEET 1 OF 1

AMP PART # 1223199-1
SHEET 1 OF 1 REV B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1223199-1](#)