

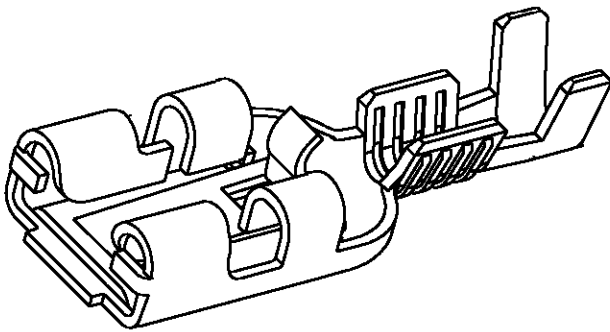


DO NOT SCALE		METRIC		THIRD ANGLE PROJECTION	
DIMENSIONS IN mm					
LTR	DESCRIPTION	DWN	APPD	DATE	
K1	ECO-09-025714	KK	AEG	17DEC09	

NOTES :

- FOR USE ON MINI HD APPLICATOR (LEFT - RIGHT FEED).
- TINPLATING THICKNESS .000080 MIN _ .000400 MAX. (INCH).
- MATERIAL PH.BRONZE ACC ASTM B103 ALLOY 511.
-  REAR ROLLING MUST TOUCH TAB.

 **5** OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

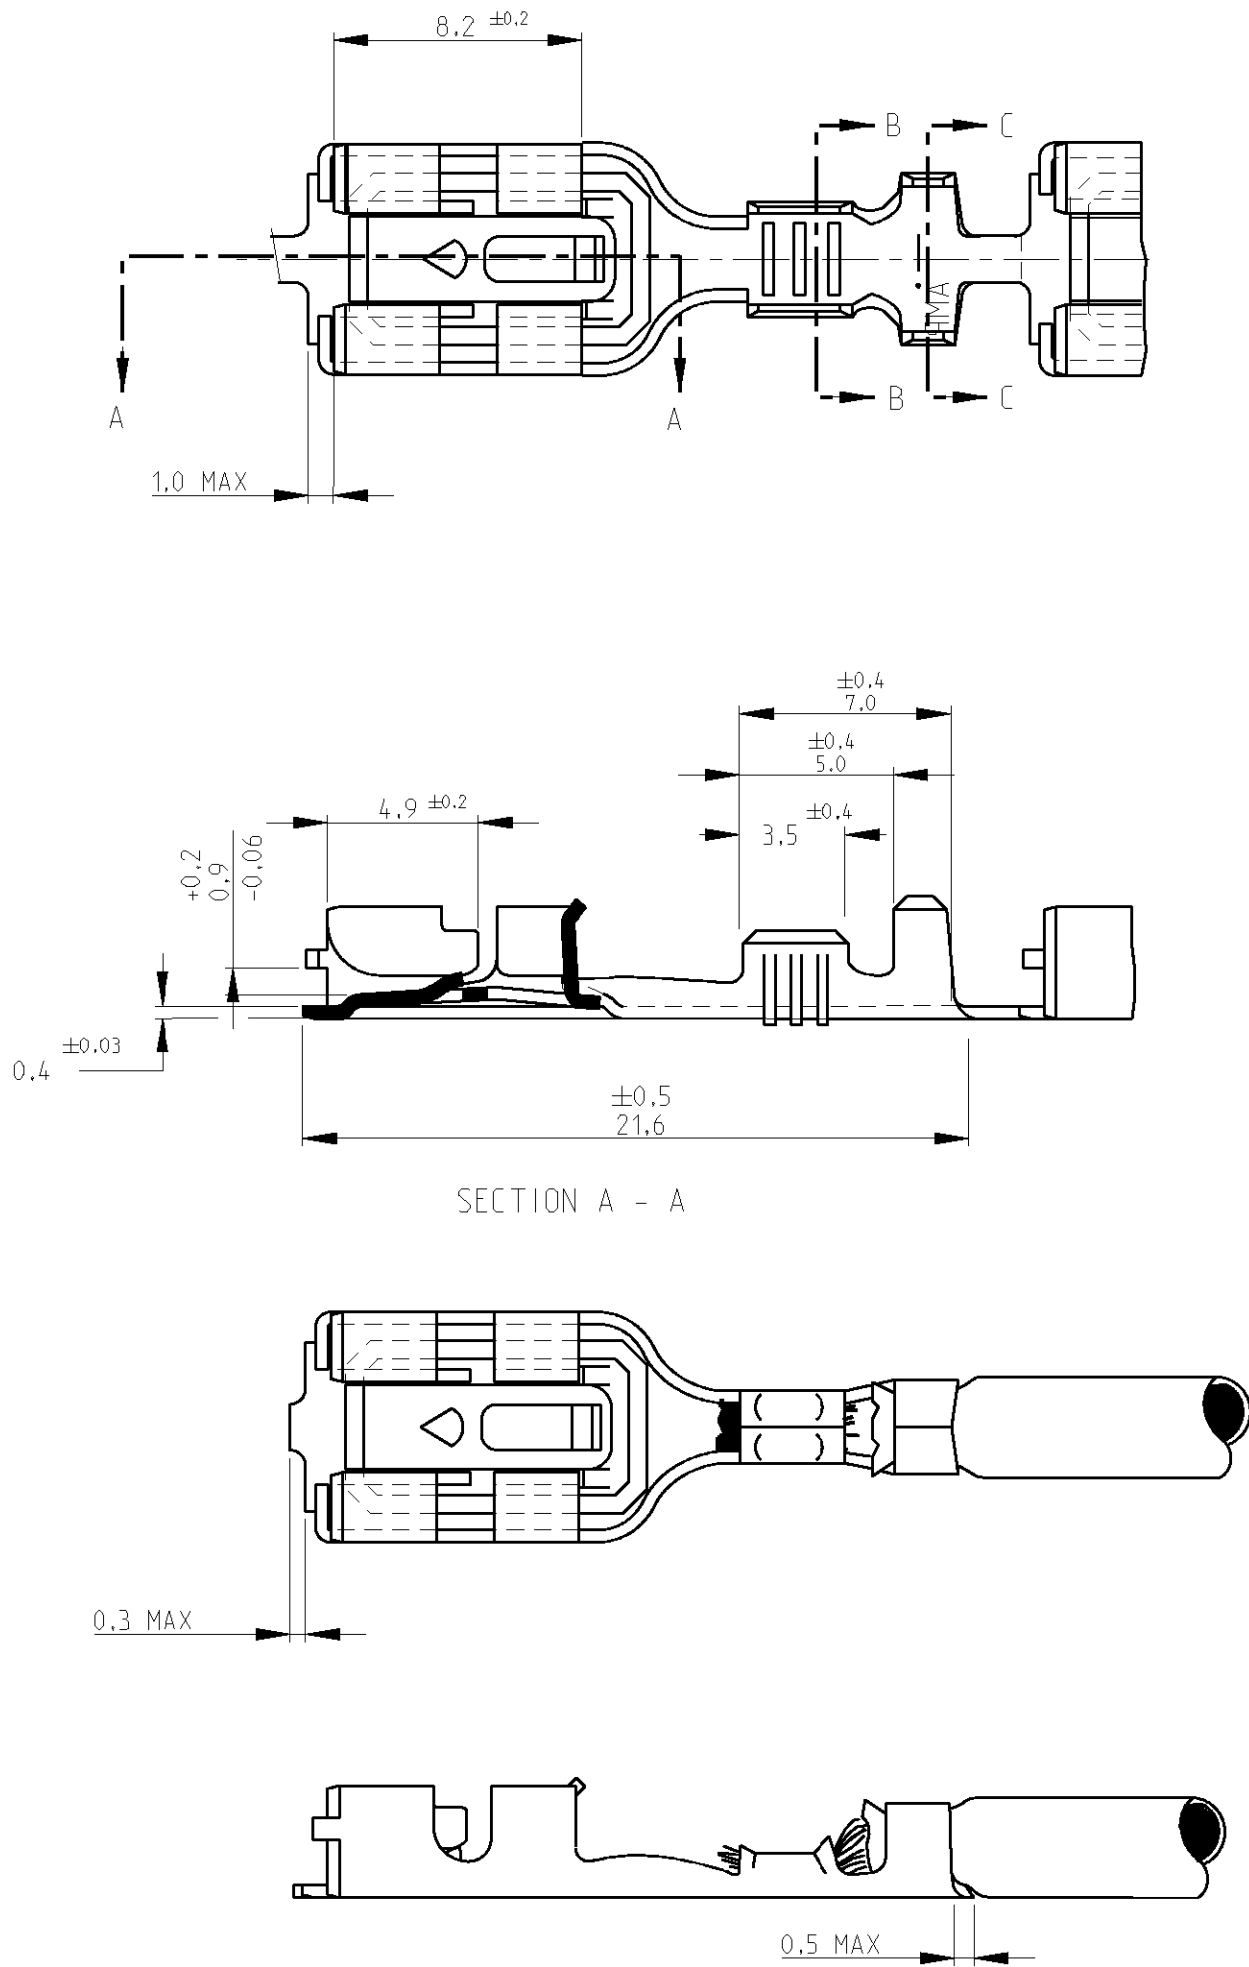

WIRE	CRIMP HEIGHT	CRIMP WIDTH
0.5mm?	1.43mm	.080 'F'
0.75mm?	1.52mm	.080 'F'
1.0mm?	1.61mm	.080 'F'

 OBSOLETE	100015-4	PRE-TINPLATED	PH.BRONZE	216329-4				
	100015-3	SILVERPLATED	PH.BRONZE	216329-3				
	100015-2	TINPLATED	PH.BRONZE	216329-2				
	100015-1	UNPLATED	PH.BRONZE	216329-1				
	LOOSE PIECE NR.	FINISH	MATERIAL	PARTNUMBER				
	CUSTOMER DRAWING	tyco <i>Electronics</i>			TYCO ELECTRONICS AMP ESPAÑOLA S.A BARCELONA ESPAÑA			
		THIS DRAWING IS UNPUBLISHED		CUSTOMER DRAWING				
		© COPYRIGHT 2002 - BY AMP-SPAIN ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.						
	FOR REFERENCE ONLY WILL NOT BE UPDATED	DR. DATE R.v.Lokven 24.04.89		WIRE RANGE 0.5-1.0mm?		NAME .250 L.I.F AUTOMOTIVE POS LOCK REC MKII.	REV.DATE D M Y	
		CHK. DATE R.v.Lokven 24.04.89		INSUL.RANGE 1.4-2.3 DIA			17	12
	APP. DATE L.v.Soest 26-11-89		SIZE A2	SHEET 1 OF 1	DWG. No.	C-216329		REV.LTR. K1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[216329-2](#)