

"High Frequency Ceramic Solutions"

5.3 GHz Balun

Detail Specification: 01/08/03

P/N 5325BL15B050


Page 1 of 2

Part Number	Frequency (MHz)	Impedance Unbal. / Bal.	Insertion Loss	Return Loss	Phase Difference	Amplitude Difference
5325BL15B050_	5150 - 5500	50/50 Ω	1.0 dB	9.5 dB	180°±10°	2.0 dB

Input Power	Impedance	Operating Temperature Range	Reel Qty
3 Watts max	50 / 50 Ω	-40 to +85°C	4,000


Mechanical Dimensions

	L	W	T	a	b	c	g	p
Inches	0.079 ± .004	0.049 ± .004	0.034 ± .004	0.012 ± .004	0.008 ± .004	0.012 + .004/- .008	0.014 ± .004	0.026 ± .002
mm	2.0 ± 0.1	1.25 ± 0.1	0.85 ± 0.1	0.30 ± 0.1	0.20 ± 0.1	0.30+0.1/-0.2	0.35 ± 0.1	0.65 ± 0.05

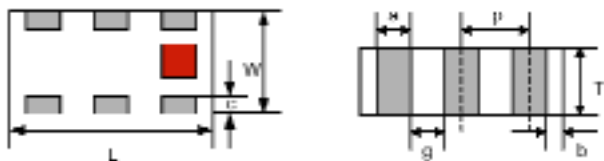


Terminal Configuration

1	Unbalanced Port	4	Balanced Port
2	GND or DC Feed	5	GND
3	Balanced Port	6	NC



Mounting Considerations


Mount devices with colored mark facing up.

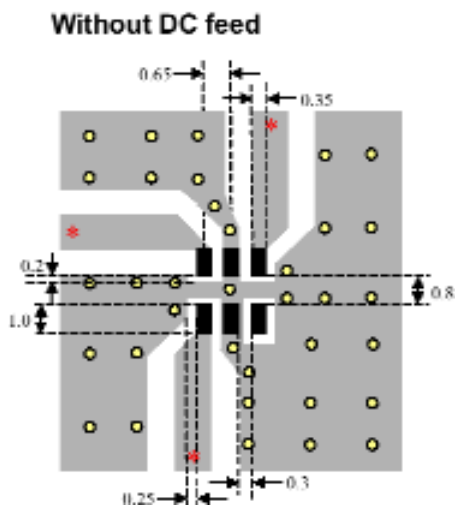

* Line width should be designed to provide 50 Ω impedance matching characteristics.

- Solder Resist
- Land
- Through-hole (ϕ 0.3)

Units: mm

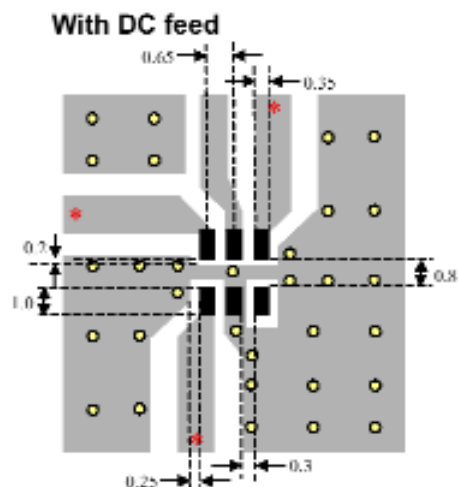

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.

“High Frequency Ceramic Solutions”


5.30 GHz Balun

Detail Specification: 01/08/03


P/N 5325BL15B050

Page 2 of 2

P/N 5325BL15B050 Typical Insertion Loss

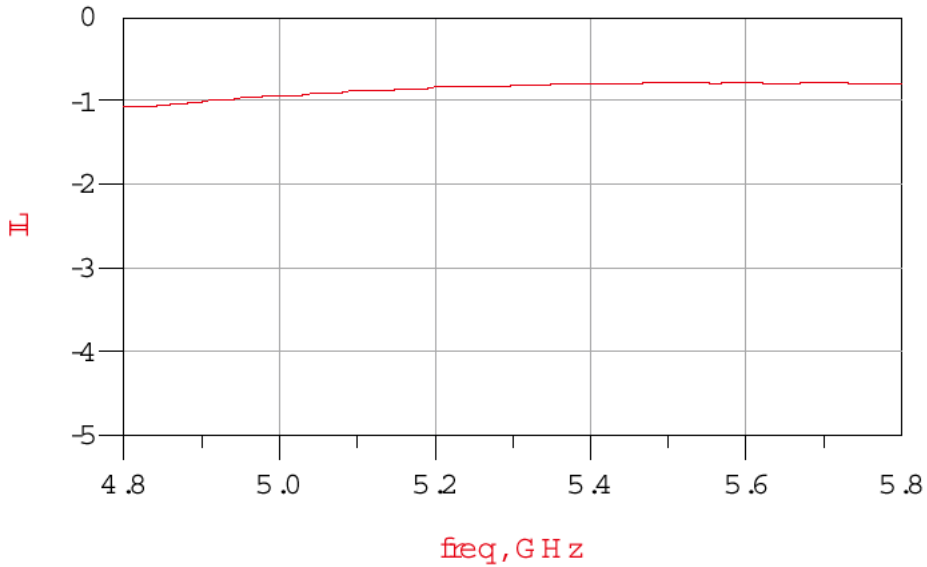

P/N 5325BL15B050 Typical Return Loss

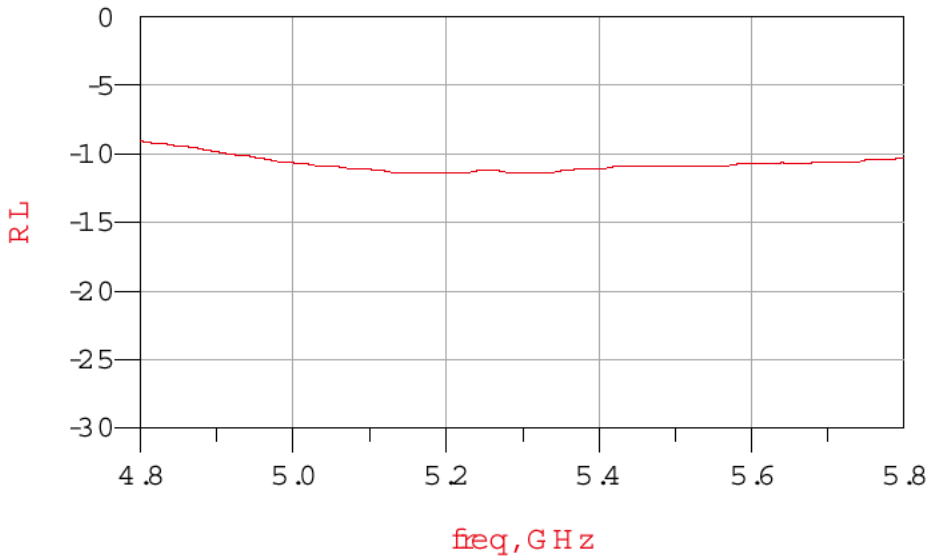

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Johanson:](#)

[5325BL15B050E](#)