

P		LTR	DESCRIPTION	DATE	DWN	APVD
		AD3	REVISED PER ECR-16-017378	22DEC2016	LN	RS

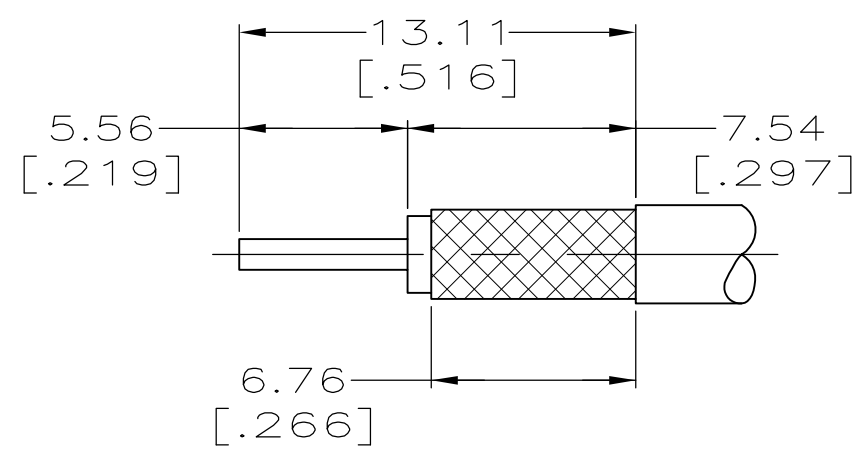
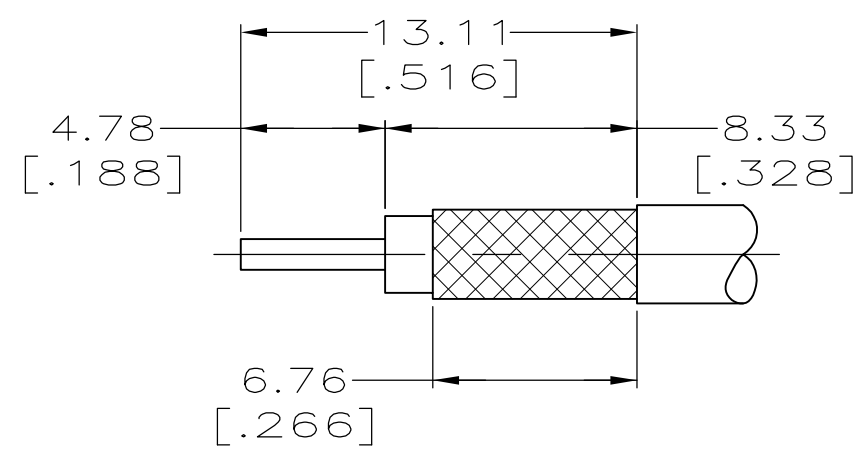
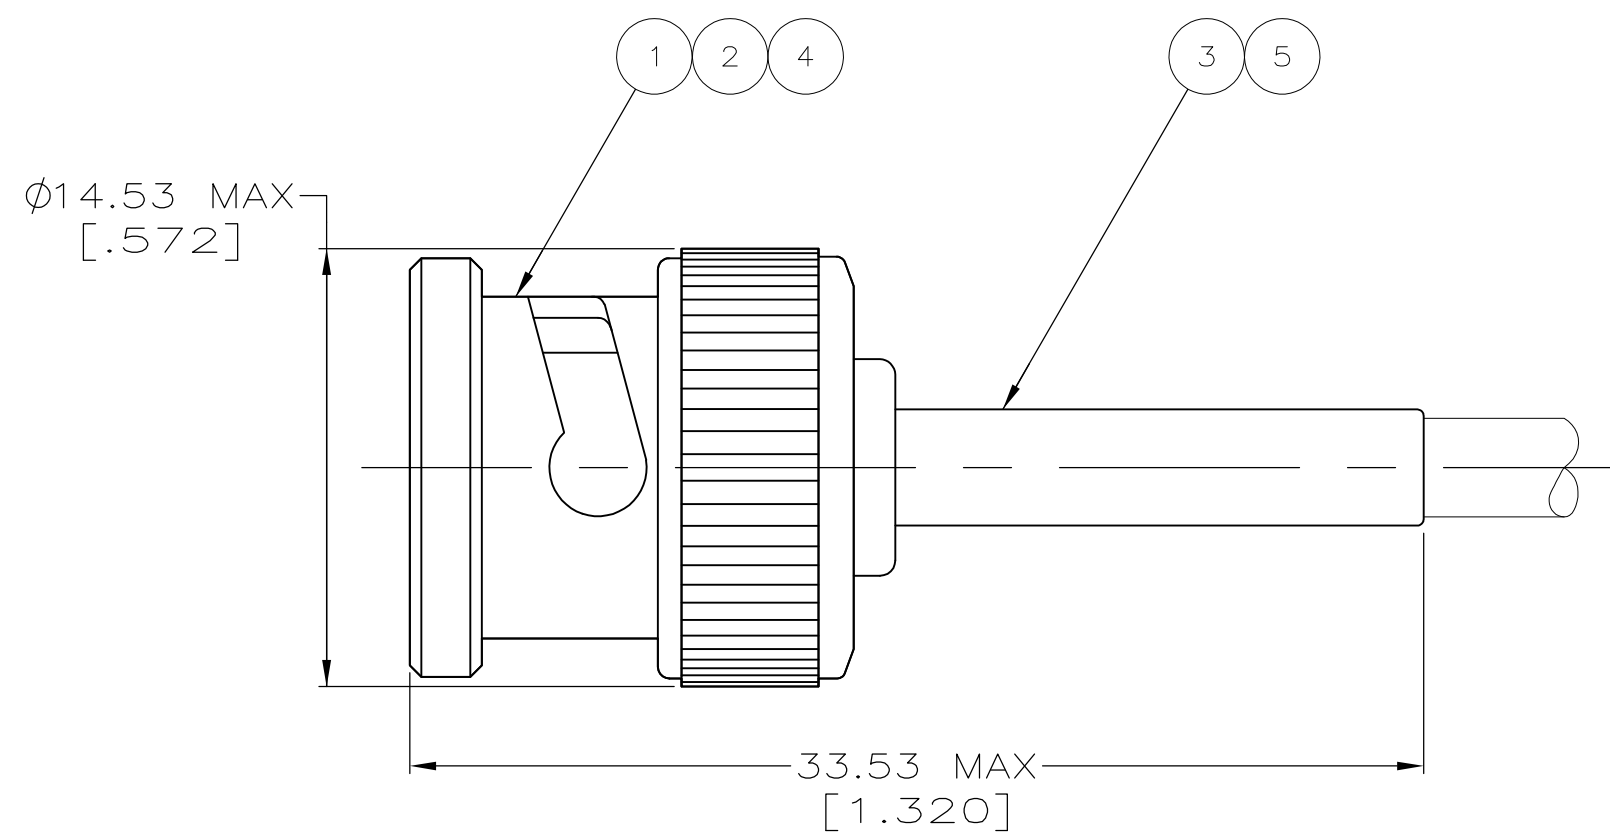



FIGURE 1

RECOMMENDED STRIP LENGTH

- ① CABLE USED WITHOUT SPACER
- ② CABLE USED WITH SPACER
3. SEE I.S. 9021
4. PARTS PACKAGED UNASSEMBLED
- ⑤ USE AMP HAND TOOL: 220190-1
- ⑥ SPECIAL PACKAGING: INDIVIDUALLY PACKAGED IN PRE-PRINTED BAG WITH SPECIAL GRAPHICS
- ⑦ CONNECTOR INDIVIDUALLY PACKAGED
- ⑧ BULK PACKAGE
- ⑨ RG-188/U, 316/U TYPE DOUBLE BRAID AND JIS CABLES 1.5D-2V, 1.5D-XV & 1.5D-XVS
- ⑩ SPECIAL PACKAGING: BULK PACKAGE 25 PIECES

	OBSOLETE	⚠	RG-59/U, 59A/U, 59B/U	6.48	[.255]	1.73	[.068]	58465-1	FIG 1	-	227423-1	9-221132-1	222246-6	413636-2	9-221128-9						
	OBSOLETE	⚠	BELDEN 9907, 89907 & RG-141/U	5.41	[.213]	1.73	[.068]	58465-1	FIG 1	-	-	9-221132-0	1-222246-6	413636-1	9-221128-8						
	OBSOLETE	⚠	RG-180/U, 195/U	4.52	[.178]	1.73	[.068]	58465-3	FIG 1	-	-	9-413658-1	1-222246-3	413636-3	9-221128-7						
		⚠	RG-179/U, 187/U	4.52	[.178]	1.73	[.068]	58465-3	FIG 1	227194-1	-	9-413658-0	1-222246-3	413636-3	9-221128-6						
		⚠	RG-174/U, 188/U, 316/U	4.52	[.178]	1.73	[.068]	58465-3	FIG 1	227194-1	-	9-413658-0	1-222246-0	413636-3	9-221128-5						
	OBSOLETE	⚠	RG-58/U, 58A/U, 58B/U, 58C/U	5.41	[.213]	1.73	[.068]	58465-1	FIG 1	-	-	9-221132-0	222246-5	413636-1	9-221128-4						
	OBSOLETE	⚠	BELDEN 8281	8.23	[.324]	1.73	[.068]	58465-2	FIG 1	-	-	9-221132-2	222246-2	413636-4	9-221128-3						
	OBSOLETE	⚠⚠⚠	RG-62/U, 62A/U, 62B/U	6.48	[.255]	1.73	[.068]	58465-1	FIG 2	-	227423-1	9-221132-1	222246-4	413636-2	9-221128-2						
			RG-59/U, 59A/U, 59B/U	6.48	[.255]	1.73	[.068]		FIG 1												
	OBSOLETE	⚠	RG-58/U, 58A/U, 58B/U, 58C/U	5.41	[.213]	1.73	[.068]	58465-1	FIG 1	-	-	9-221132-0	222246-2	413636-1	9-221128-1						
	OBSOLETE		RG-58/U, 58A/U, 58B/U, 58C/U	5.41	[.213]	1.73	[.068]	58465-1	FIG 1	-	-	9-221132-0	222246-2	413636-1	9-221128-0						
	OBSOLETE	⚠	BELDEN 1167A	4.52	[.178]	1.73	[.068]	58465-3	FIG 1	-	-	9-413658-1	1-222246-0	413636-3	3-221128-4						
	OBSOLETE	⚠⚠		4.52	[.178]	1.73	[.068]	58465-3	FIG 1	227194-1	-	9-413658-2	1-222246-0	413636-3	3-221128-2						
		⚠⚠	JIS CABLE 3D-2V	5.41	[.213]	1.73	[.068]	58465-1	FIG 1	-	-	8-221132-9	1-222246-6	413636-6	3-221128-1						
SUPERSEDED BY 2-221128-5		⚠	RG-180/U, 195/U	4.52	[.178]	1.73	[.068]	58465-3	FIG 1	-	-	9-413658-1	1-222246-3	413636-3	3-221128-0						
	OBSOLETE	-	⚠	4.52	[.178]	1.73	[.068]	58465-3	FIG 1	227194-1	-	9-413658-2	1-222246-0	413636-3	2-221128-9						
		⚠	BELDEN 9907, 89907 & RG-141/U	5.41	[.213]	1.73	[.068]	58465-1	FIG 1	-	-	9-221132-0	1-222246-6	413636-1	2-221128-7						
	OBSOLETE	⚠	RG-180/U, 195/U	4.52	[.178]	1.73	[.068]	58465-3	FIG 1	-	-	9-413658-1	1-222246-3	413636-3	2-221128-5						
		⚠	RG-179/U, 187/U	4.52	[.178]	1.73	[.068]	58465-3	FIG 1	227194-1	-	9-413658-0	1-222246-3	413636-3	2-221128-3						
SUPERSEDED BY 2-5221128-1		⚠	RG-174/U, 188/U, 316/U	4.52	[.178]	1.73	[.068]	58465-3	FIG 1	227194-1	-	9-413658-0	1-222246-0	413636-3	2-221128-1						
	OBSOLETE	⚠	RG-58/U, 58A/U, 58B/U, 58C/U	5.41	[.213]	1.73	[.068]	58465-1	FIG 1	-	-	9-221132-0	222246-5	413636-1	2-221128-0						
SUPERSEDED BY 1-221128-2		⚠	BELDEN 8281	8.23	[.324]	1.73	[.068]	58465-2	FIG 1	-	-	9-221132-2	222246-5	413636-4	1-221128-9						
		⚠	RG-59/U, 59A/U, 59B/U	6.48	[.255]	1.73	[.068]	58465-1	FIG 1	-	227423-1	9-221132-1	222246-6	413636-2	1-221128-8						
		⚠	BELDEN 9266	6.48	[.255]	1.73	[.068]	58465-1	FIG 1	-	-	9-221132-1	222246-2	413636-2	1-221128-7						
	OBSOLETE	-	BELDEN 9209	6.48	[.255]	1.73	[.068]	58465-1	FIG 1	-	-	9-221132-1	222246-6	413636-5	1-221128-6						
SUPERSEDED BY 1-221128-2		⚠	BELDEN 8281	8.23	[.324]	1.73	[.068]	58465-2	FIG 1	-	-	9-221132-2	222246-5	413636-4	1-221128-5						
		⚠⚠⚠	RG-62/U, 62A/U, 62B/U	6.48	[.255]	1.73	[.068]	58465-1	FIG 2	-	227423-1	9-221132-1	222246-6	413636-2	1-221128-4						
			RG-59/U, 59A/U, 59B/U	6.48	[.255]	1.73	[.068]		FIG 1												
	OBSOLETE	⚠	RG-58/U, 58A/U, 58B/U, 58C/U	5.41	[.213]	1.73	[.068]	58465-1	FIG 1	-	-	9-221132-0	222246-5	413636-1	1-221128-3						
	OBSOLETE	⚠	BELDEN 8281	8.23	[.324]	1.73	[.068]	58465-2	FIG 1	-	-	9-221132-2	222246-2	413636-4	1-221128-2						
		⚠⚠⚠	RG-62/U, 62A/U, 62B/U	6.48	[.255]	1.73	[.068]	58465-1	FIG 2	-	227423-1	9-221132-1	222246-4	413636-2	1-221128-1						
			RG-59/U, 59A/U, 59B/U	6.48	[.255]	1.73	[.068]		FIG 1												
		⚠	RG-58/U, 58A/U, 58B/U, 58C/U	5.41	[.213]	1.73	[.068]	58465-1	FIG 1	-	-	9-221132-0	222246-2	413636-1	1-221128-0						
	OBSOLETE	-	BELDEN 8281	8.23	[.324]	1.73	[.068]	58465-2	FIG 1	-	-	9-221132-2	222246-7	413636-4	221128-9						
		⚠⚠	RG-62/U, 62A/U, 62B/U	6.48	[.255]	1.73	[.068]	58465-1	FIG 2	-	227423-1	9-221132-1	222246-8	413636-2	221128-8						
			RG-59/U, 59A/U, 59B/U	6.48	[.255]	1.73	[.068]		FIG 1												
	OBSOLETE	-	RG-58/U, 58A/U, 58B/U, 58C/U	5.41	[.213]	1.73	[.068]	58465-1	FIG 1	-	-	9-221132-0	222246-7	413636-1	221128-7						
SUPERSEDED BY 221128-3		-	BELDEN 8281	8.23	[.324]	1.73	[.068]	58465-2	FIG 1	-	-	9-221132-2	222246-5	413636-4	221128-6						
		⚠⚠	RG-62/U, 62A/U, 62B/U	6.48	[.255]	1.73	[.068]	58465-1	FIG 2	-	227423-1	9-221132-1	222246-6	413636-2	221128-5						
			RG-59/U, 59A/U, 59B/U	6.48	[.255]	1.73	[.068]		FIG 1												
SUPERSEDED BY 221128-1		-	RG-58/U, 58A/U, 58B/U, 58C/U	5.41	[.213]	1.73	[.068]	58465-1	FIG 1	-	-	9-221132-0	222246-5	413636-1	221128-4						
	OBSOLETE	-	BELDEN 8281	8.23	[.324]	1.73	[.068]	58465-2	FIG 1	-	-	9-221132-2	222246-2	413636-4	221128-3						
		⚠⚠	RG-62/U, 62A/U, 62B/U	6.48	[.255]	1.73	[.068]	58465-1	FIG 2	-	227423-1	9-221132-1	222246-4	413636-2	221128-2						
			RG-59/U, 59A/U, 59B/U	6.48	[.255]	1.73	[.068]		FIG 1												
		-	RG-58/U, 58A/U, 58B/U, 58C/U	5.41	[.213]	1.73	[.068]	58465-1	FIG 1	-	-	9-221132-0	222246-2	413636-1	221128-1						
	REMARKS		FOR USE WITH CABLE	FERRULE			CONTACT	DIE SET	⚠	STRIP LENGTH	⑤	TUBING QTY=1	④	SPACER QTY=1	③	FERRULE QTY=1	②	CONTACT, PLUG QTY=1	①	PLUG ASSEMBLY QTY=1	PART NUMBER
				HEX CRIMP HEIGHTS																	

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWG NO. M. E. COWHER CHKD BY M. PHILLIPS APPROV'D BY M. PHILLIPS		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME			
		0 PLC ± —		PRODUCT SPEC		PLUG, COMMERCIAL BNC	
		1 PLC ± —					
		2 PLC ± 0.41 [016]		APPLICATION SPEC			
		3 PLC ± —					
MATERIAL		WEIGHT		SIZE		CAGE CODE	DRAWING NO
—		0.000000		A1		00779	C221128
CUSTOMER DRAWING				SCALE		SHEET	OF
				4:1		1	1
						REV	A3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-221128-1](#)