

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0705550024

Status:

Active

Overview:

SL Modular Connectors

Description:

2.54mm Pitch SL Header, Single Row, Right Angle, 3.05mm Pocket, Shrouded, with Press-fit Plastic Peg, 25 Circuits, Tin (Sn) Plating

Documents:

- 3D Model

Product Specification TS-70541-001-001 (PDF)
- Drawing (PDF)

Product Specification TS-70541-100-001 (PDF)
- Product Specification PS-70400-001 (PDF)

Packaging Specification PK-70873-0015 (PDF)
- Product Specification PS-70541-001 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA

LR19980

General

Product Family

Series

Application

Overview

Product Name

UPC

PCB Headers

70555

Signal, Wire-to-Board

SL Modular Connectors

SL

800753765979

Physical

Breakaway

Circuits (Loaded)

Circuits (maximum)

Color - Resin

Durability (mating cycles max)

Flammability

Glow-Wire Capable

Guide to Mating Part

Lock to Mating Part

Material - Metal

Material - Plating Mating

Material - Plating Termination

Material - Resin

Net Weight

Number of Rows

Orientation

PC Tail Length

PCB Locator

PCB Retention

PCB Thickness - Recommended

Packaging Type

Pitch - Mating Interface

Plating min - Mating

Plating min - Termination

Polarized to Mating Part

Shrouded

Stackable

Temperature Range - Operating

Termination Interface: Style

No

25

25

Black

25

94V-0

No

Yes

Yes

Brass, Phosphor Bronze

Tin

Tin

High Temperature Thermoplastic

5.335/g

1

Right Angle

3.30mm

Yes

Yes

1.60mm

Tube

2.54mm

3.810µm

3.810µm

Yes

Fully

No

-40° to +105°C

Through Hole


Electrical

Current - Maximum per Contact

Voltage - Maximum

3.0A

250V

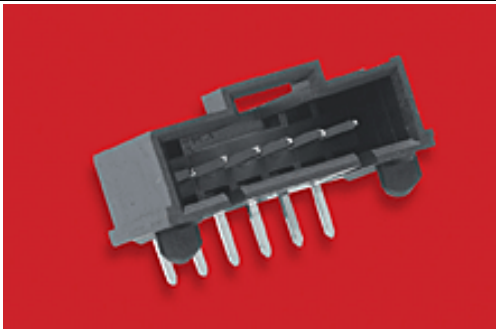

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
ED/61/2018 (27 June
2018)

Halogen-Free
Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

70555 Series

Mates With

SL Crimp Housing [70066](#) Option N, [70066](#)
Option G, [70430](#) Option G, [70400](#) Option G

Solder Process Data

Lead-freeProcess Capability

WAVE

Material Info

Reference - Drawing Numbers

Packaging Specification

PK-70873-0015

Product Specification

PS-70400-001, PS-70541-001, TS-70541-001-001,
TS-70541-100-001

Sales Drawing

705550000-SD-000

This document was generated on 11/05/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[70555-0024](#)