

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-



COPYRIGHT

By

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD




C2

REVISED (ECR-13-007117)

30APR2013

B.W


H.K

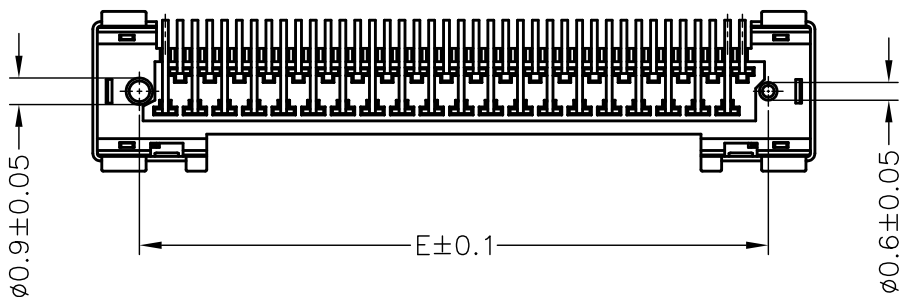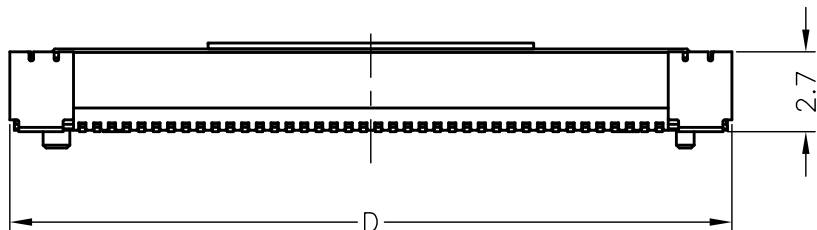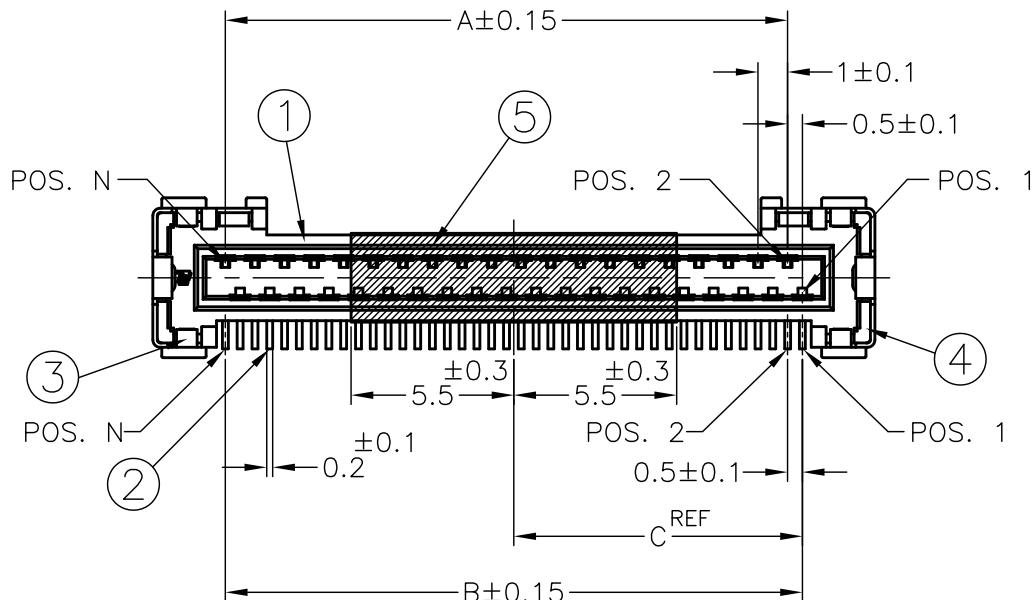

DIMENSION OF EACH SYMBOL

P/N	POS	A	B	C	D	E	F	G	WEIGHT (gram)
2023308-1	20	9	9.5	4.75	14.4	11.25	10.3	7.5	0.21
2023308-2	30	14	14.5	7.25	19.4	16.25	15.3	12.5	0.285
2023308-3	40	19	19.5	9.75	24.4	21.25	20.3	17.5	0.36
2023308-4	50	24	24.5	12.25	29.4	26.25	25.3	22.5	0.435

2023308-1, -2, -3, -4 : AS SHOWN

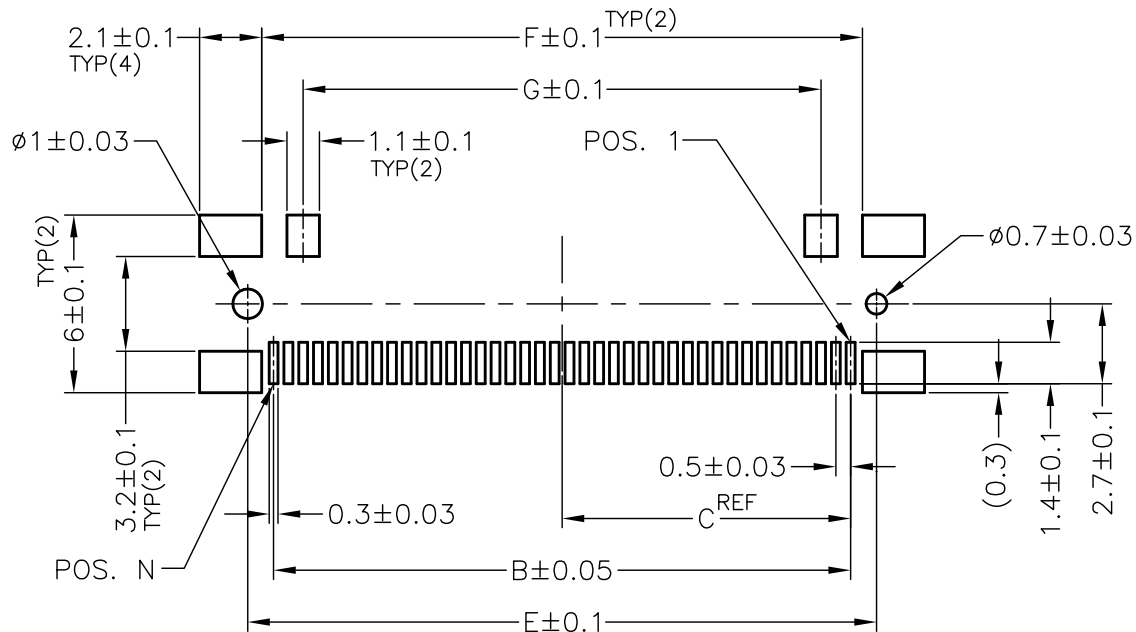

REFERENCE P.C. BOARD LAYOUT

NOTE:

- DISCOLORATION OR CHANGING TO BRIGHT MAY HAPPEN DURING REFLOW PROCESS. HOWEVER IT'S NO IMPACT FOR MECHANICAL/ELECTRICAL PERFORMANCE.
- PRODUCT MUST MEET CONTROLLED SUBSTANCES PER TE SPEC: TEC-138-702 SPECIAL REQUEST OF LOW HALOGEN SPEC.:

CHLORINE (Cl): 900 ppm MAX.
BROMINE (Br): 900 ppm MAX.
Br+Cl: 1500ppm MAX.

SPECIAL REQUEST OF REACH SvHC SPEC ON NON-METAL MATERIAL:

DBP: 1000 ppm MAX.
DEHP: 1000 ppm MAX.
BBP: 1000 ppm MAX.
HBCDD: 1000 ppm MAX.

⑤	POLYIMIDE FILM	POLYIMIDE	BROWN
④	RIGHT SOLDER PEG	COPPER ALLOY	NICKEL 0.0013 MM MIN. UNDER PLATING
③	LEFT SOLDER PEG	COPPER ALLOY	TIN PLATING 0.002MM MIN. ALL OVER
②	CONTACT	COPPER ALLOY	NICKEL 0.00127mm MIN. ALL OVER AU 0.000025~0.00008mm MIN. AT TINE AU 0.0002~0.0005mm AT CONTACT AREA
①	HOUSING	THERMOPLASTIC (UL94 V-0)	BLACK
ITEM	NAME	MATERIAL	FINISH/COLOR

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN 04NOV08

N.SOONG

CHK 04NOV08

C.WAYDE

APVD 04NOV08

H.KODAMA

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity




NAME
LCD COAXIAL EMBEDDED DISPLAY INTERFACE (LCEDI)
SR SERIES
RECEPTACLE ASSY

SIZE CAGE CODE DRAWING NO RESTRICTED TO



A3 00779 C-2023308

SCALE 4:1 SHEET 1 OF 2 REV C2




165°~180°
PELING ANGLE

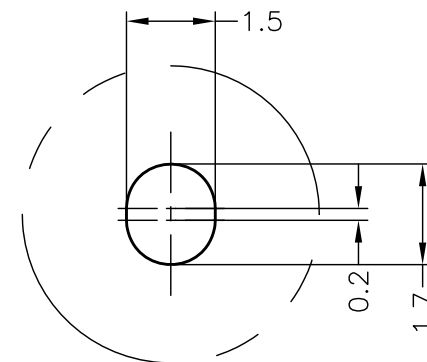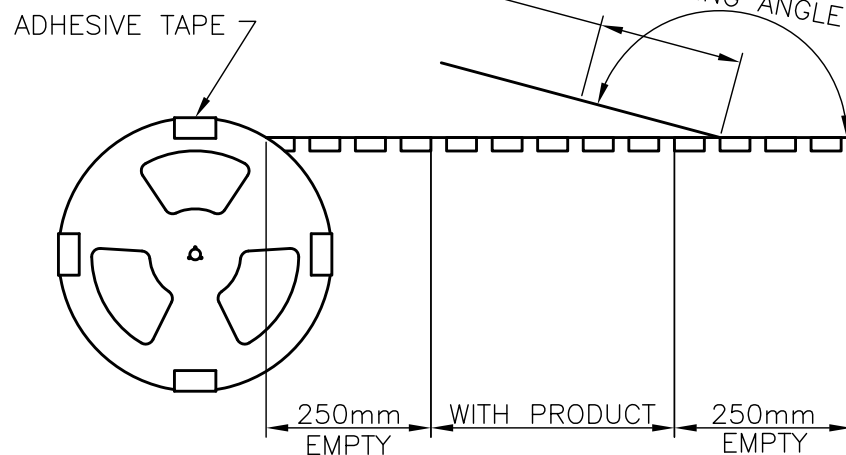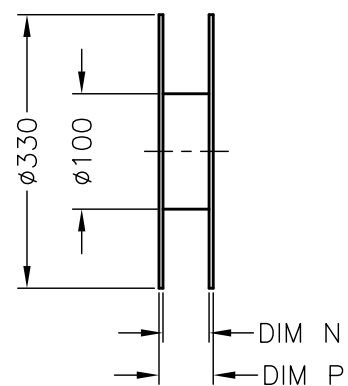

DETAIL F
SCALE 8:1

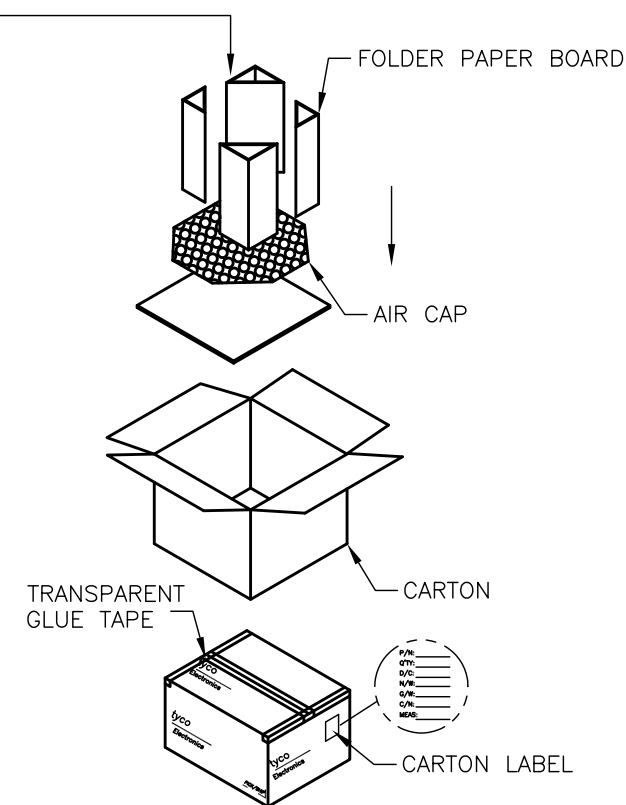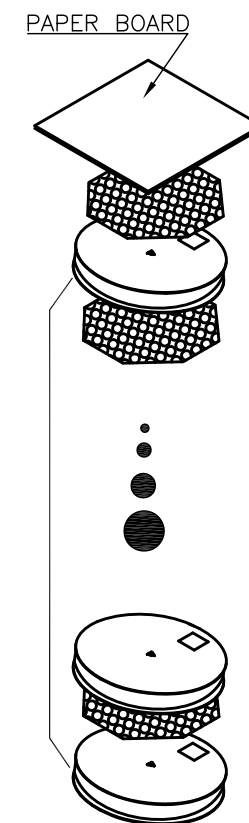

1. MATERIAL: CARRY TAPE: PS, COLOR:BLACK
COVER TAPE: PET; COLOR: CLEAR.
2. CARTON DIMENSIONS: 395X395X225

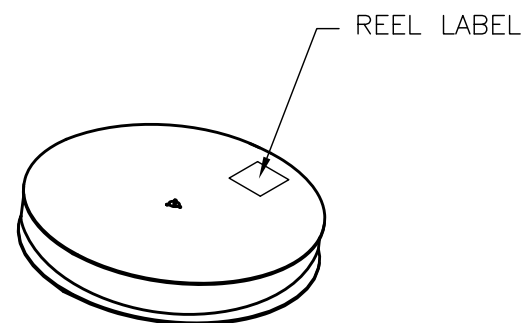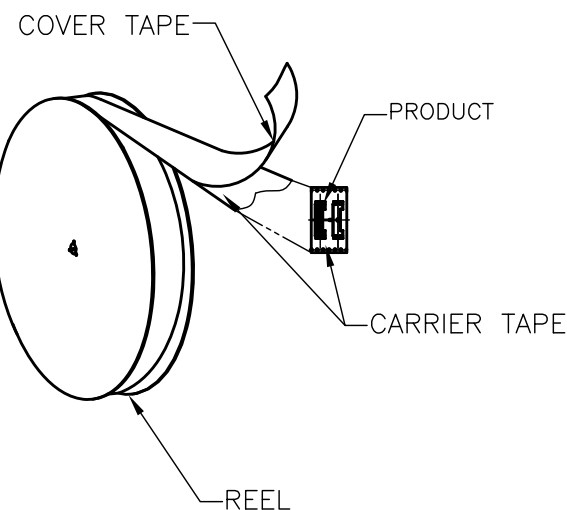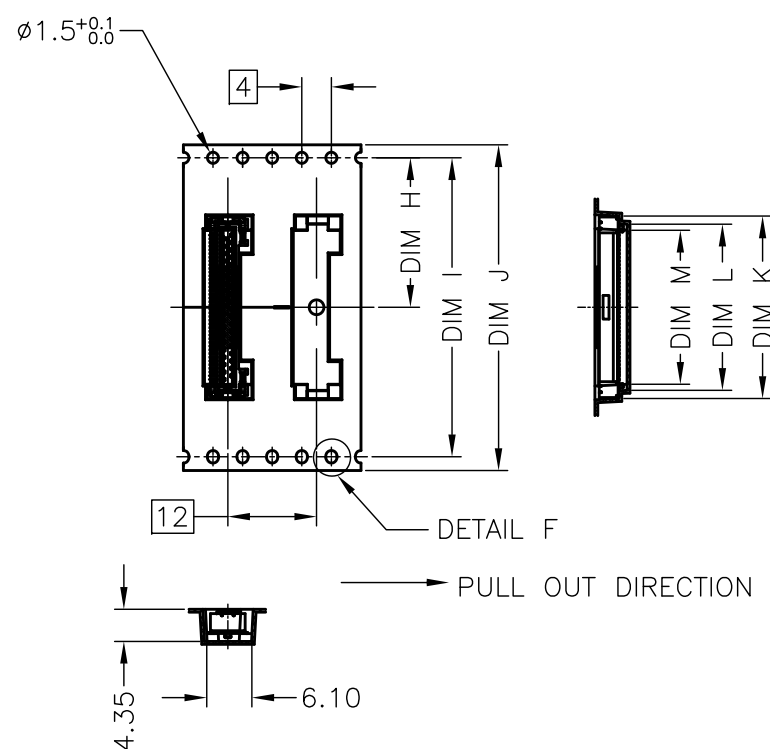

DIMENSION OF EACH SYMBOL

P/N	POS	H	I	J	K	L	M	N	P
2023308-1	20	8.2	16.4	24	14.7	12.45	10.8	24.4	29.2
2023308-2	30	14.2	28.4	32	19.7	17.45	15.8	32.4	37.2
2023308-3	40	20.2	40.4	44	24.7	22.45	20.8	44.4	49.2
2023308-4	50	26.2	52.4	56	29.7	27.45	25.8	56.4	61.2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	
mm	
	
MATERIAL	

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PLC	± 0.3
PLC	± 0.3
PLC	± 0.3
PLC	± 0.3
PLC	± 0.3
ANGLES	± 2°
FINISH	

DWN	
CHK	
APVD	
PRODUCT SPEC	
APPLICATION SPEC	
WEIGHT	
CUSTOMER DRAWING	



TE Connectivity

NAME

LCD COAXIAL EMBEDDED DISPLAY INTERFACE (LCEDI)
SR SERIES
RECEPTACLE ASSY

SIZE

CAGE CODE	
-----------	--

DRAWING NO

©-2023308

RESTRICTED TO

CUSTOMER DRAWING

SCALE 1 : 1

SHEET 2 OF 2

REV	C2
-----	----

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2023308-3](#)