


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
A1	-		A	NEW DRAWING CREATED	26APR2006	KF CG
			A2	NEW PROE DRAWING ECR-10-007842	12APR2010	Fru Goe

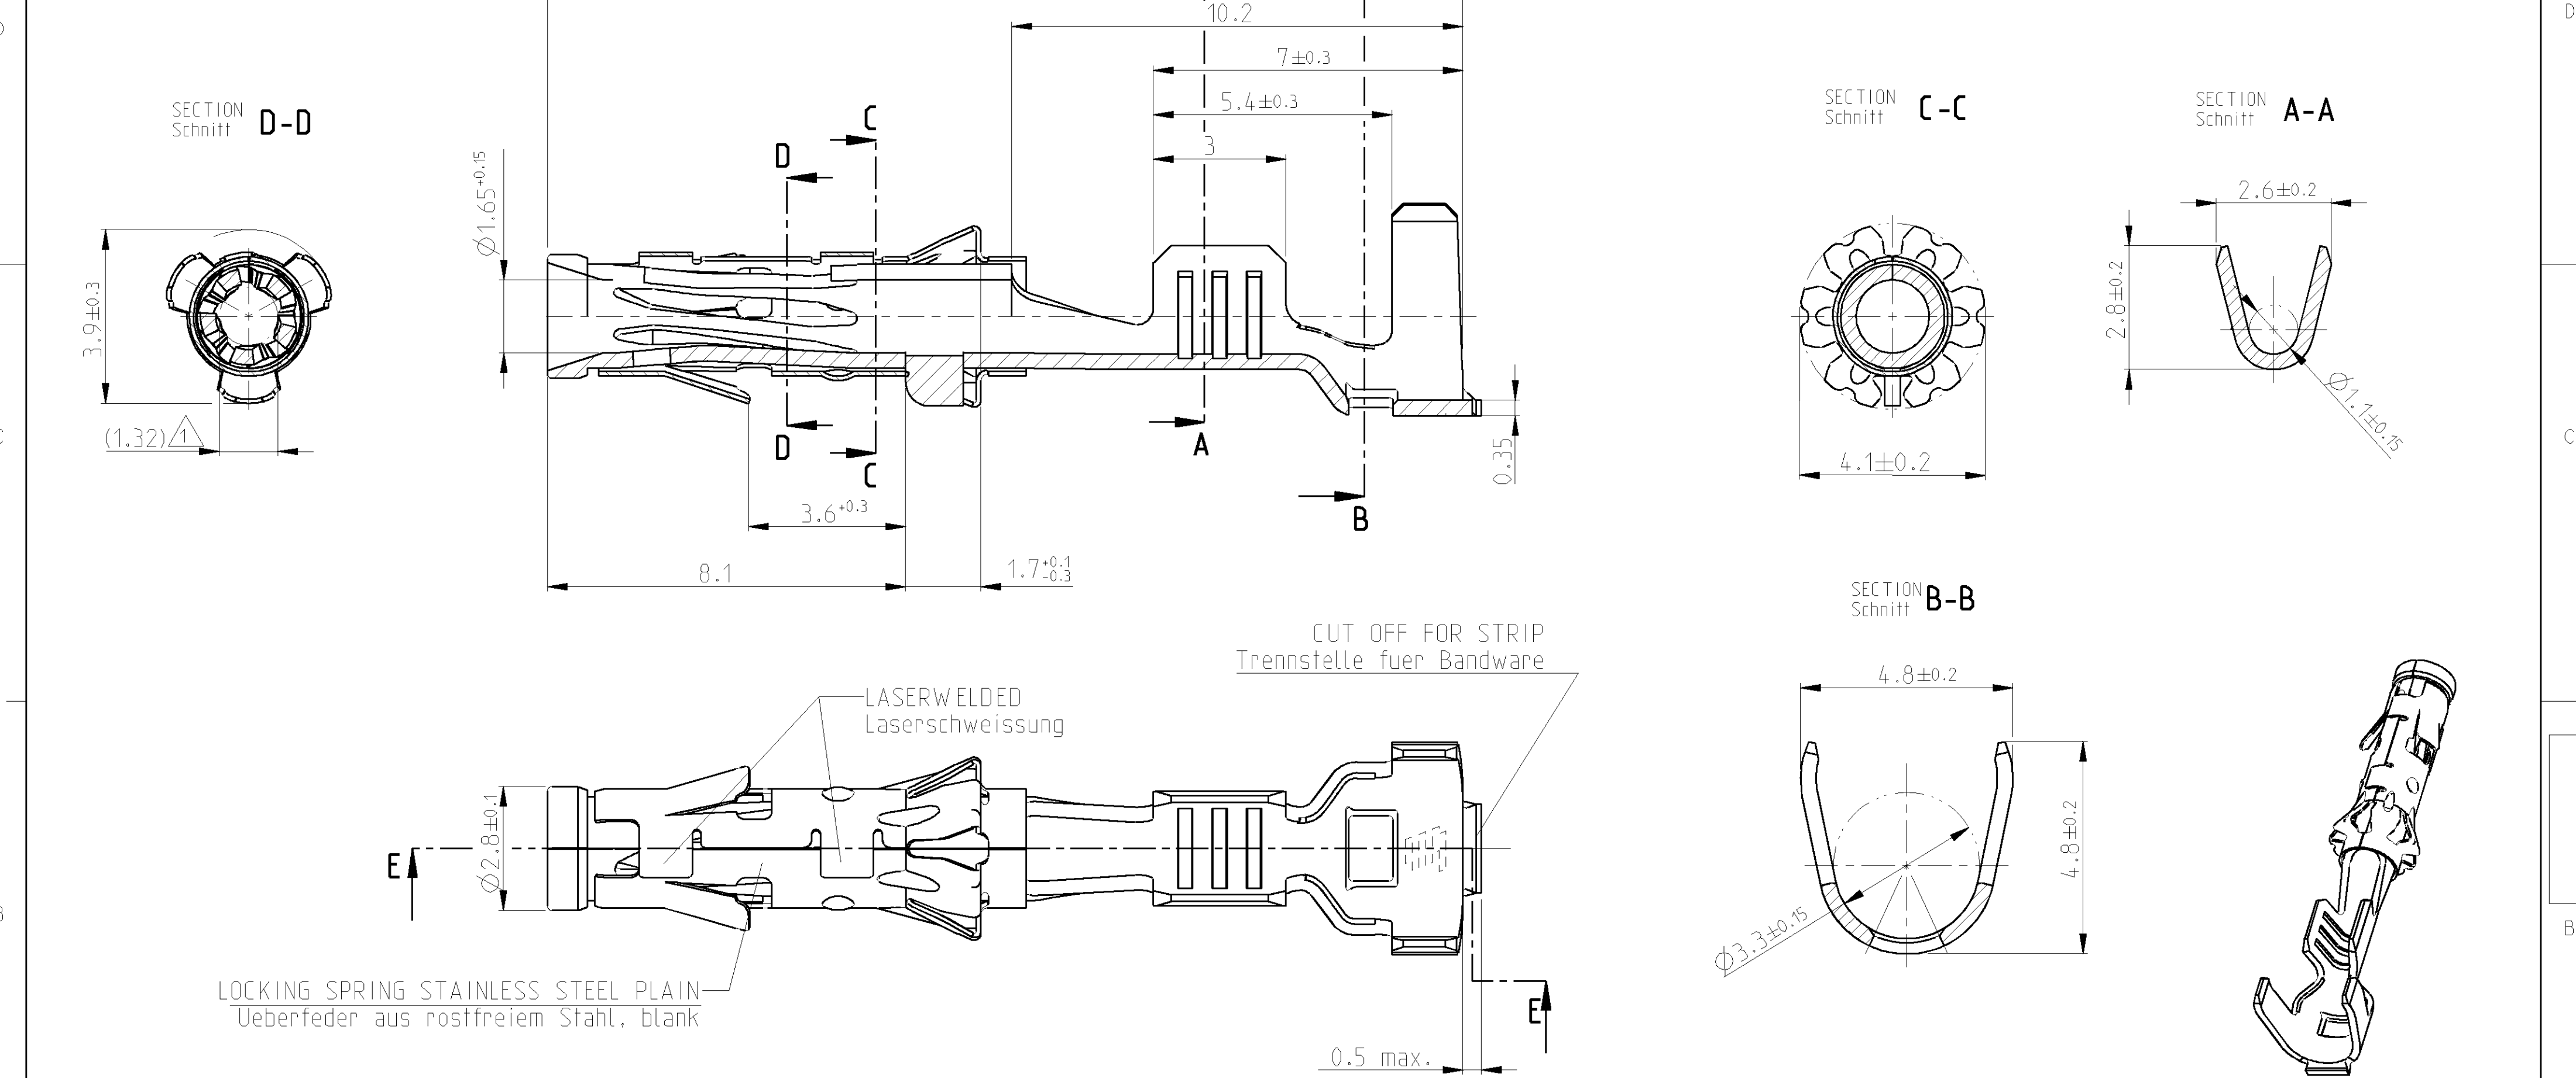

REMARKS
Bemerkungen

⚠ FOR EVALUATING THE GAP SIZE, THE EXTRACTION FORCE OF MIN. 7N TESTED WITH TESTPIN 1703285-1, HAS PRIORITY. MEASURE AT A RATE OF 25mm/min. PRIOR TO EACH MEASUREMENT THE TESTPIN HAS TO BE CLEANED WITH AN ALCOHOL WIPE. THE MEASUREMENT CAN ONLY BE DONE AFTER THE COMPLETE DRYING OF THE SURFACE. Zur Beurteilung des Oeffnungsmasses ist die Ziehkraft min. 7N geprueft mit Pruefstift 1703285-1, ausschlaggebend. Pruefgeschwindigkeit 25MM/min. Der Testpin muss vor jedem Messen mit einem Tuch und Alkohol gereinigt werden. Die Buchse muss vor jeder Messung in Testbenzin gereinigt werden. Die Messeung darf erst nach vollstaendiger Abtrocknung der Oberflaeche durchgefuehrt werden.

2. WIRE RANGE: 0.5-1.0mm²
INSULATION RANGE: Ø3.4mm FLR
Drahtgroessenbereich: 0.5-1.0mm²
Isolationsdurchmesser: Ø3.4mm FLR

-	-	-	-	-
-	-	-	-	-
-	-	-	-	-
1-1418497-0	A	-	CuNi 18Zn20	PLAIN/blank
TE PART NO	REV.	PCS.	MATERIAL	SURFACE COLOR

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS:
mm

MATERIAL
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

Ø-PLC
1-PLC
2-PLC
3-PLC
4-PLC
ANGLES
FINISH

±
±
±
±
±
±1.5°
-

±0.15
±0.15
±0.15
±0.15
±0.15
±1.5°
-

DWN
Fruehwirth, K.
CHK
Goepfel, C.
APVD
-

26APR2006
26APR2006
-

PRODUCT SPEC
108-18028
APPLICATION SPEC
114-18040
WEIGHT
0.4g

CUSTOMER DRAWING

KUNDENZEICHNUNG

Tyco Electronics

Tyco Electronics AMP GmbH
64625 Bensheim (Germany)

NAME
DIA. 1.5mm CONTACT SOCKET
Ø1.5 mm kontaktbuchse

SIZE
A2

CAGE CODE
00779

DRAWING NO
C-1418497

RESTRICTED TO
-

SCALE
10:1

SHEET
1 OF 1

REV
A1

AMP 1471-9 REV 31MAR2000

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1418497-0](#)