
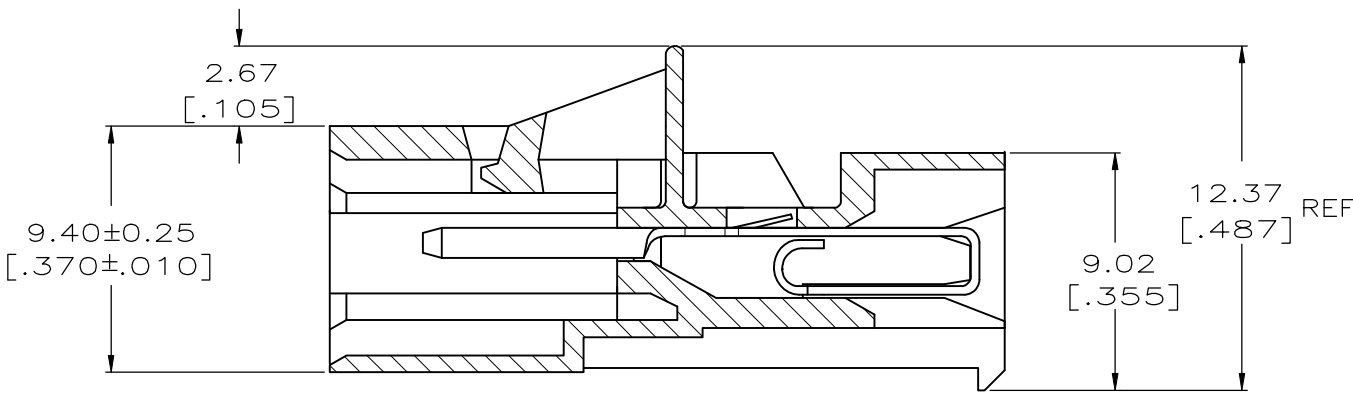
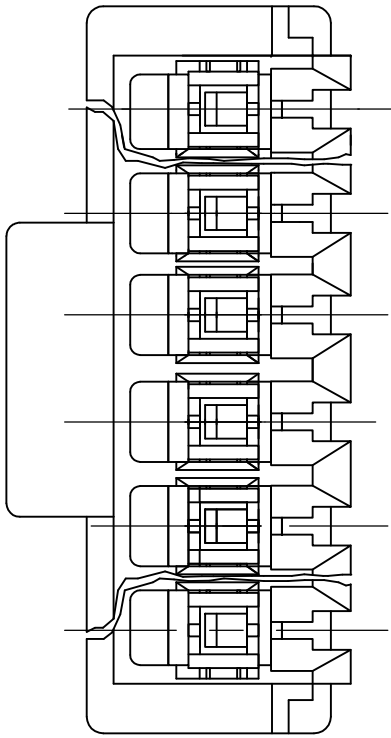
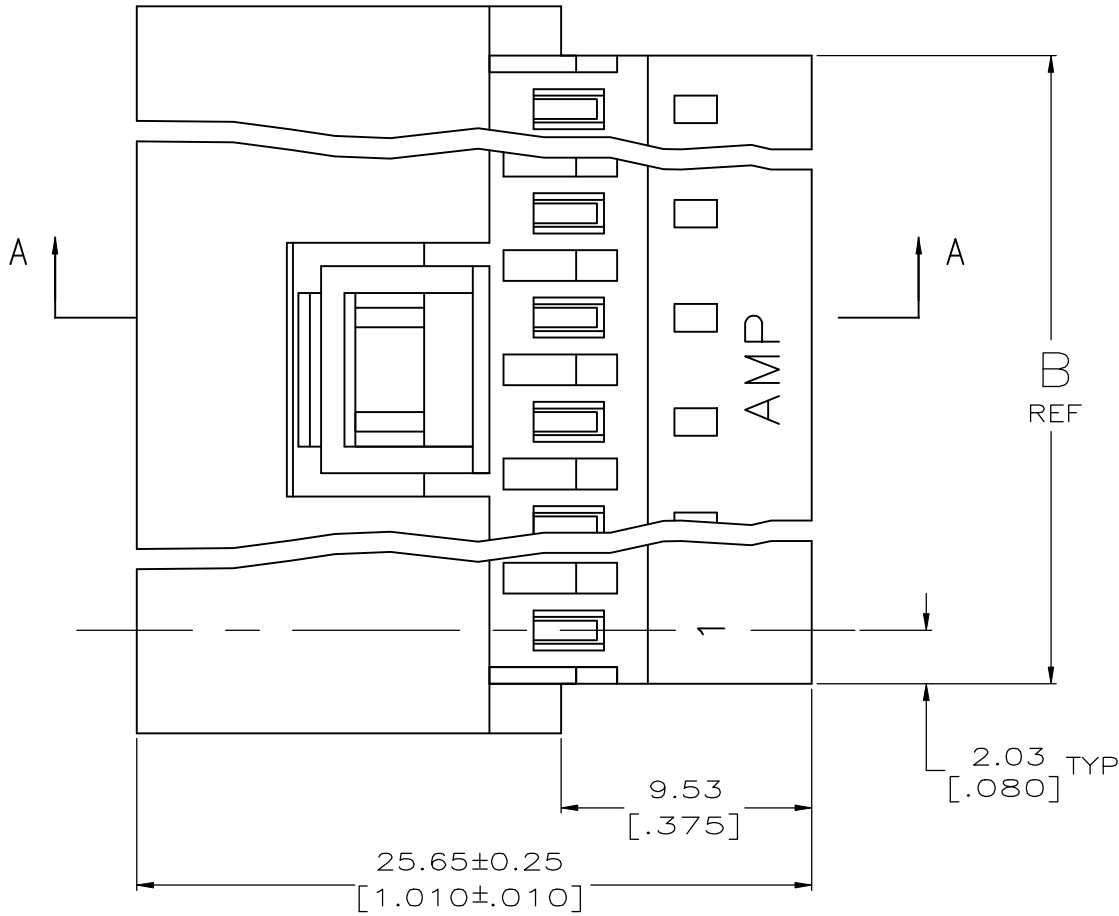
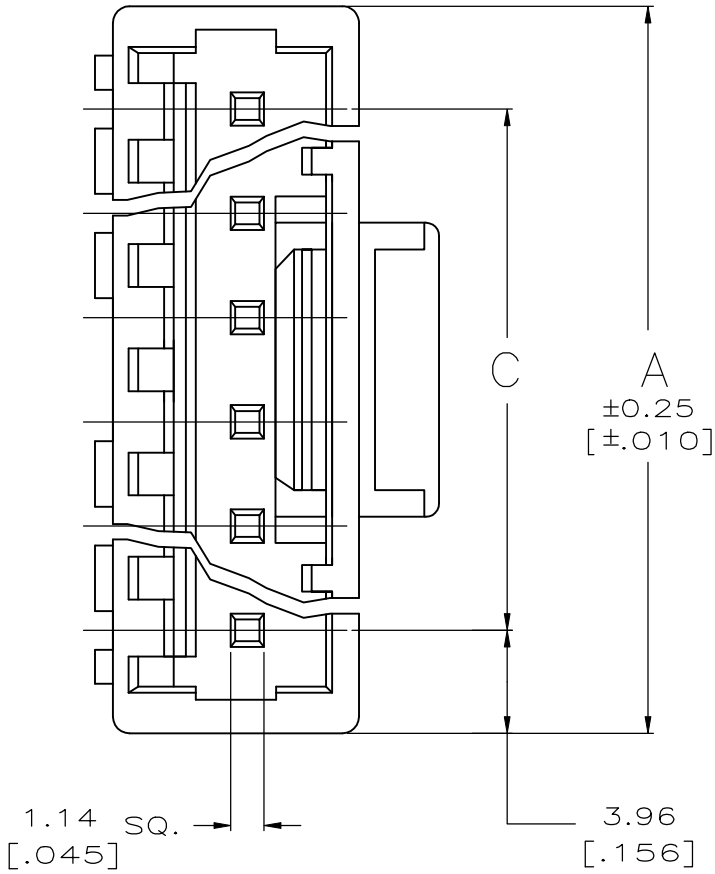


LOC	DIST	REVISIONS				
FT	0	P	LTR	DESCRIPTION	DATE	DWN APVD
		E3	REVISED	PER ECR—17—018328	10JAN2018	BDA SG

- 1 MATERIAL: CONNECTOR — NYLON UL94—V2 (RED).
CONTACTS — 0.30[.012] THICK COPPER ALLOY
(BRIGHT TIN—LEAD 0.00203[.000080] MIN. THICK
FOR CONTACTS 641437—2 THRU 2—641437—4).
(MATTE TIN PLATE 0.00203[.000080] MIN. THICK
FOR CONTACTS 3—641437—2 THRU 5—641437—4).
- 2 CONTACTS ACCEPT #22 AWG SOLID, FUSED STRANDED OR
STRANDED (7 STRANDS) WIRE WITH 2.41 [.095] MAX INSULATION DIA.
- 3 BOW, IN ANY DIRECTION, NOT TO EXCEED 0.15 [.006] PER IN.
- 4 HOUSING FEATURES: CLOSED END.
- 5 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 7 OBSOLETE PARTS



SECTION A—A

OBSOLETE SUPERSEDED OBSOLETE SUPERSEDED SUPERSEDED SUPERSEDED SUPERSEDED	TIN	91.14	[3.588]	95.20	[3.748]	99.06	[3.900]	24	5-641437-4		
		55.47	[2.184]	59.54	[2.344]	63.40	[2.496]	15	4-641437-5		
		43.59	[1.716]	47.65	[1.876]	51.51	[2.028]	12	4-641437-2		
		31.70	[1.248]	35.76	[1.408]	39.62	[1.560]	9	3-641437-9		
		19.81	[.780]	23.88	[.940]	27.74	[1.092]	6	3-641437-6		
		11.89	[.468]	15.95	[.628]	19.81	[.780]	4	3-641437-4		
		7.92	[.312]	11.99	[.472]	15.85	[.624]	3	3-641437-3		
		3.96	[.156]	8.03	[.316]	11.89	[.468]	2	3-641437-2		
OBSOLETE SUPERSEDED OBSOLETE SUPERSEDED SUPERSEDED SUPERSEDED SUPERSEDED	TIN-LEAD	91.14	[3.588]	95.20	[3.748]	99.06	[3.900]	24	2-641437-4		
		55.47	[2.184]	59.54	[2.344]	63.40	[2.496]	15	1-641437-5		
		43.59	[1.716]	47.65	[1.876]	51.51	[2.028]	12	1-641437-2		
		31.70	[1.248]	35.76	[1.408]	39.62	[1.560]	9	6-41437-9		
		19.81	[.780]	23.88	[.940]	27.74	[1.092]	6	6-41437-6		
		11.89	[.468]	15.95	[.628]	19.81	[.780]	4	6-41437-4		
		7.92	[.312]	11.99	[.472]	15.85	[.624]	3	6-41437-3		
		3.96	[.156]	8.03	[.316]	11.89	[.468]	2	6-41437-2		
FINISH				C		B		A		NO. OF CIRCUITS	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.											
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		OWN		23JUN05		 TE Connectivity			
mm [INCHES]				D CARPENTER		7/21/03					
				D BOSSI		7/21/03					
				D BOSSI		7/21/03					
		0 PLC ±		PRODUCT SPEC		NAME		MTA 156 POSTED CONNECTOR ASSEMBLY 22 AWG			
		1 PLC ±		—		SIZE					
		2 PLC ±		—		CAGE CODE					
		3 PLC ±		—		DRAWING NO					
4 PLC ±		—		APPLICATION SPEC		A1		00779		641437	
ANGLES		±		WEIGHT		SCALE		5:1		SHEET 1 of 1	
FINISH		±		CUSTOMER DRAWING		REV		E3			
MATERIAL		—									

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-641437-4](#)