
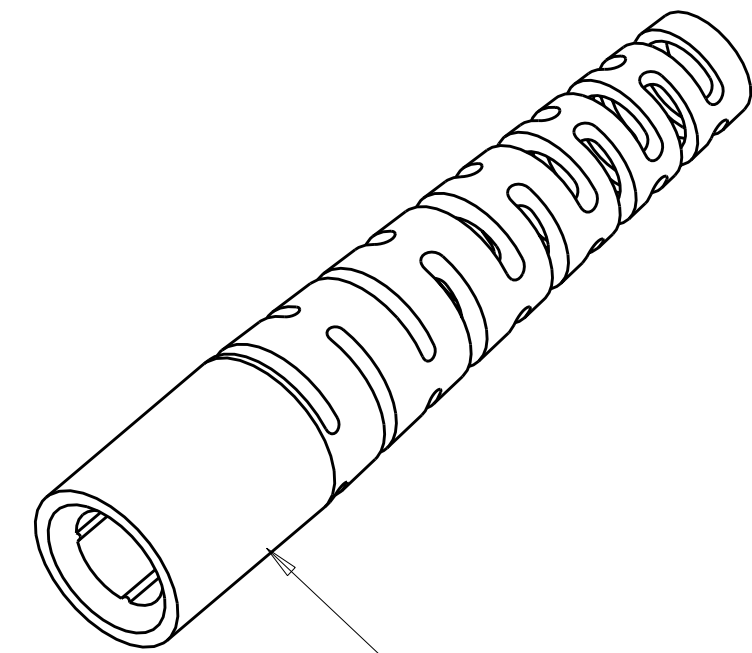
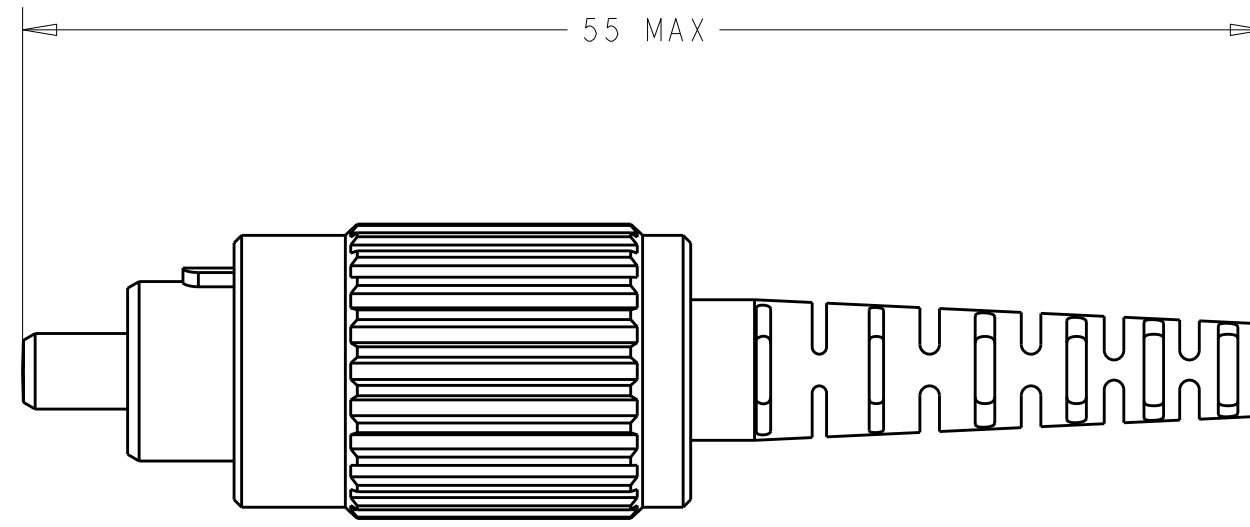


LOC	DIST	REVISIONS					
CE	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	RELEASE ECR-08-023822	30SEP2008	BB	SM
			AI	ADD NOTE 4	16MAR2009	BB	SB

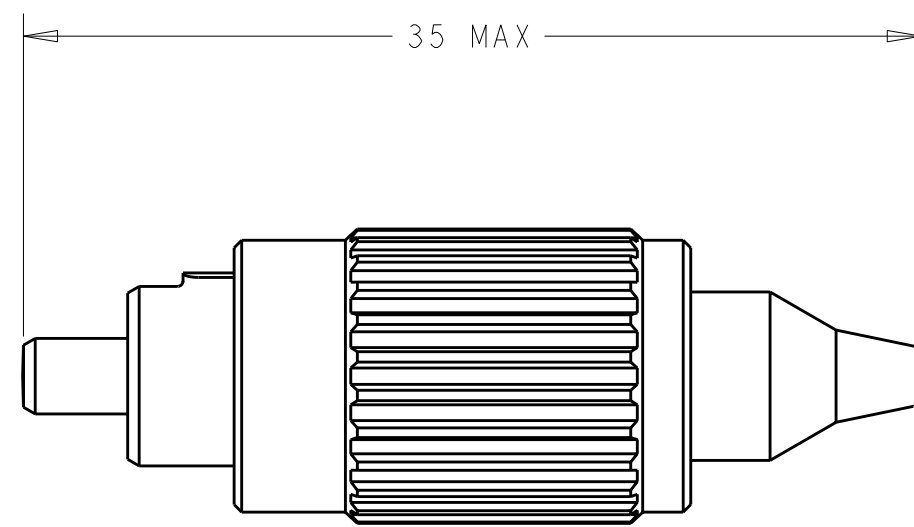


—BEND LIMITING BOOT

-  MATERIAL:
- PROTECTIVE COVER: LDPE, COLOR: BLACK, NON-FR
 - CONNECTOR SUBASSEMBLY:
 - COUPLING NUT: ELECTOLESS NICKEL PLATED BRASS
 - PLUG BODY: PPS-GF40, COLOR: BEIGE.*
 - RETAINER BODY: ALUMINUM, CLEAR ANODIZE.
 - SPRING: STAINLESS STEEL
 - FERRULE ASSEMBLY: CERAMIC/PBT-GF17.*
 - EPOXY FILL TUBING: PTFE, COLOR: CLEAR, UL VW-I RATED
 - BUFFER BOOT: TPE, COLOR: BLUE.*
 - CRIMP EYELET/SHRINK TUBE ASSEMBLY: ALUMINUM/POLYOLEFIN,
COLOR: YELLOW/BLACK (2.4mm) , UL VW-I RATED.
 - BEND LIMITED BOOT: PP, COLOR: BLUE.*
 - *UL94 V-0 RATED AT QUALIFYING THICKNESS.


2 TO BE USED WITH 900um BUFFERED FIBER.

3 BULK PACKAGE.


4. INSTRUCTION SHEET: 408-8674 AVAILABLE FOR DOWNLOAD AT
www.tycoelectronics.com/documents OR
www.ampnetconnect.com/foguide.

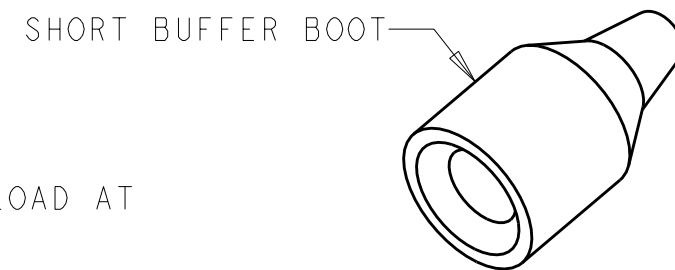


SHORT BUFFER BOOT

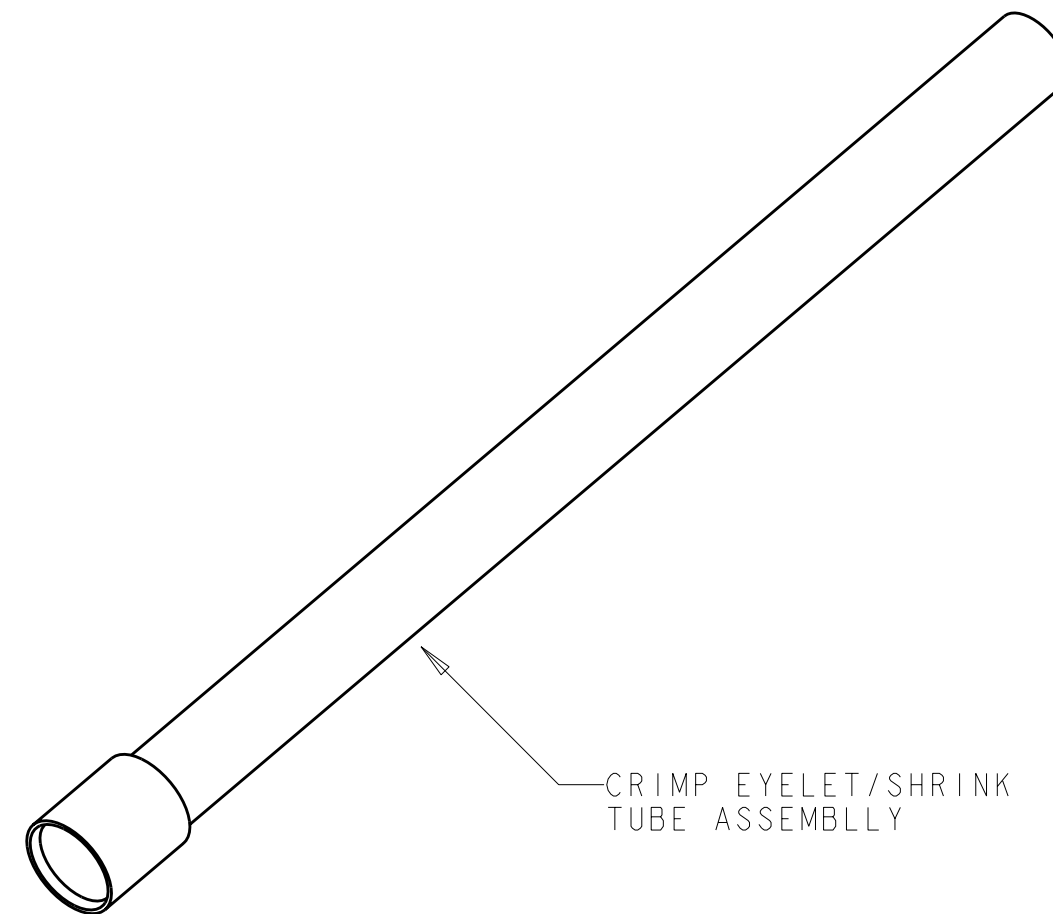

—CRIMP EYELET/SHRINK
TUBE ASSEMBLY

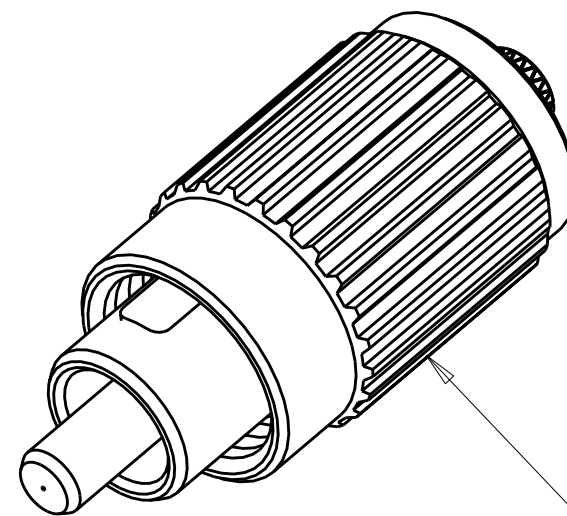

CONNECTOR SUBASSEMBLY



- PROTECTIVE COVER

	NONE	6754264-8
3	1.6-2.0mm	6754264-7
3	2.4mm	6754264-6
	2.4mm	6754264-5
	1.6-2.0mm	6754264-4
2	SHORT BUFFER	6754264-2
	BOOT	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN B. BRIGGS 15JUL2005		 Tyco Electronics Harrisburg, PA 17105-3608					
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME					
mm		CHK S. MILLER 15JUL2005		CONNECTOR KIT, SINGLEMODE, FC, 900um, 1.6-2.4mm					
		APVD S. RUCHTER 15JUL2005							
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH		PRODUCT SPEC - APPLICATION SPEC -							
MATERIAL		WEIGHT -		SIZE A2	CAGE CODE 00779	DRAWING NO G-6754264	RESTRICTED TO -		
		-		CUSTOMER DRAWING		SCALE NTS	SHEET 1	OF 1	REV A1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6754264-6](#)