


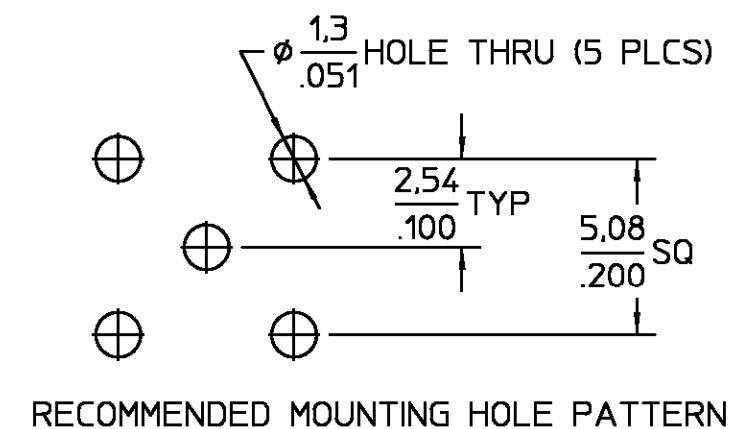

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
02 ₁	REVISED DATA TABLE PER ECN 95-0262	6/21/95	S. Morley
02 ₂	REVISED	DM 3/15/99	Wag 3/16/99

NOTES:
1. CAPTURED CENTER CONTACT

ELECTRICAL	MECHANICAL	ENVIRONMENTAL	HOUSING	BRASS, PER ASTM-B-16 HALF HARD	NICKEL PLATE PER QQ-N-290
Nominal Impedance (Ohms) <u>50</u>	Force to Engage: (Lbs) <u>3.4 MAX</u>	Temperature Rating <u>-65°C to +165°C</u>	DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
Frequency Range (GHz) <u>DC TO 6.0</u>	Force to Disengage: (Lbs) <u>1.77 MIN - 4.5 MAX</u>	Vibration <u>MIL-STD-202, Method 204,</u>	CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
Voltage Rating (VRMS MAX) <u>335 @ Sea level</u>	Center Contact Captivation: Axial <u>4.5lbs @ 1 minute</u> <u>with .006" displacement</u>	Condition B Thermal shock <u>MIL-STD-202, Method 107,</u>	COMPONENT	MATERIAL	FINISH
VSWR <u>N/A</u>		Condition B Moisture Resistance <u>MIL-STD-202, Method 106</u>	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCE ON DEC ANGLES <u>±0.13 ± 1°</u>	DRAWN BY K.C.MAHER 10/18/90 CHECKED BY M.Y. 10-19-90 APPD BY QRL 10-19-90	AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599
Insertion Loss <u>N/A</u>		Corrosion <u>MIL-STD-202,</u> <u>Method 101, Condition B,</u> <u>48 Hrs</u>	These drawings and specifications are the property of AMP incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.	USE ASS'Y PROCEDURE N/A NO. AP_____	TITLE OSX PRINTED WIRING BOARD JACK RECEPTACLE STRAIGHT TERMINAL
Corona, 70,000 Ft (VRMS MIN) <u>250</u>					SIZE B
D.W.V. (VRMS MIN) <u>1000</u>					CODE IDENT NO. 26805
Contact Resistance					5862-5003-10
Center Contact (Milliohms MAX) <u>5.0</u>					REV 02 2
Outer Contact (Milliohms MAX) <u>1.0</u>					SCALE 5:1
RF High Potential					SHEET 1 OF 1
(VRMS MIN @ 5 MHz) <u>670</u>					
I.R. (Megohms Min) <u>10,000</u>					

CUSTOMER DRAWING

AMP PART # 1060989-1
SHEET 1 OF 1 REV A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5862-5003-10](#)