



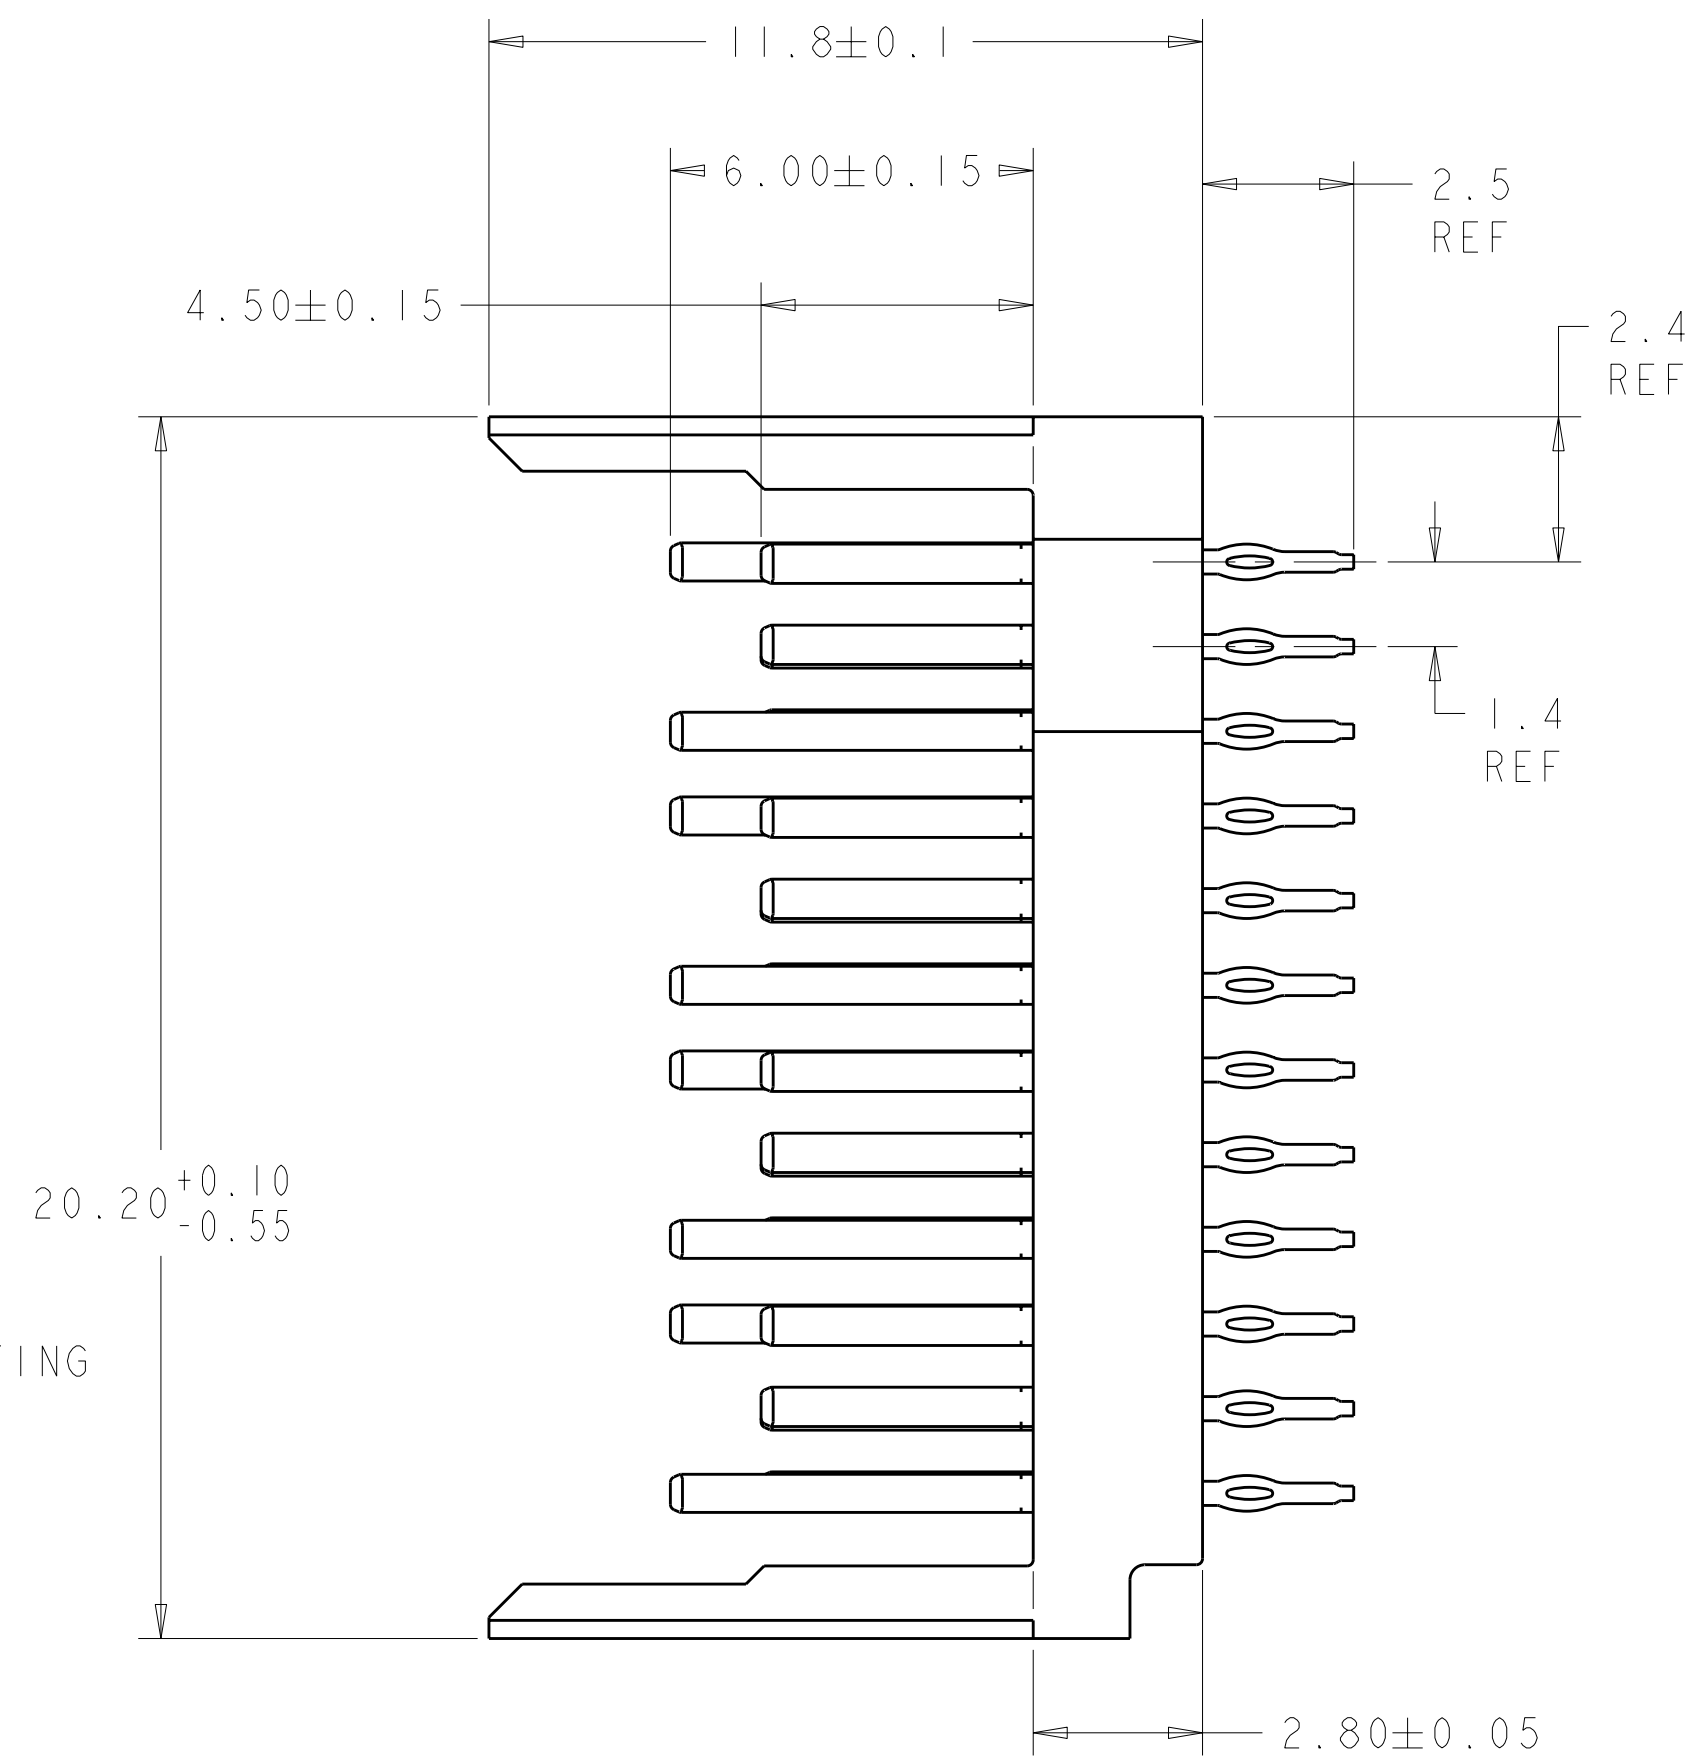

- △ MATERIAL:
CONTACT - PHOS BRONZE
HOUSING - LCP, UL 94V-0, COLOR - BLACK
- △ FINISH: CONTACT
MATING AREA - 0.76µm MIN GOLD OVER 1.27µm MIN NICKEL
COMPLIANT PIN AREA - 0.5µm MIN MATTE TIN OVER
1.27µm MIN NICKEL
- △ CONNECTOR MARKED WITH PART NUMBER, DATE CODE
AND STANDARD IN APPROXIMATE AREA SHOWN
- △ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY
CUSTOMER.
5. CONTACT AREA LUBRICATED WITH BELLCORE
APPROVED LUBRICANT. TECHNICAL REFERENCE
GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- △ REFERENCE APPLICATION SPEC 114-13202 FOR RECOMMENDED
PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.

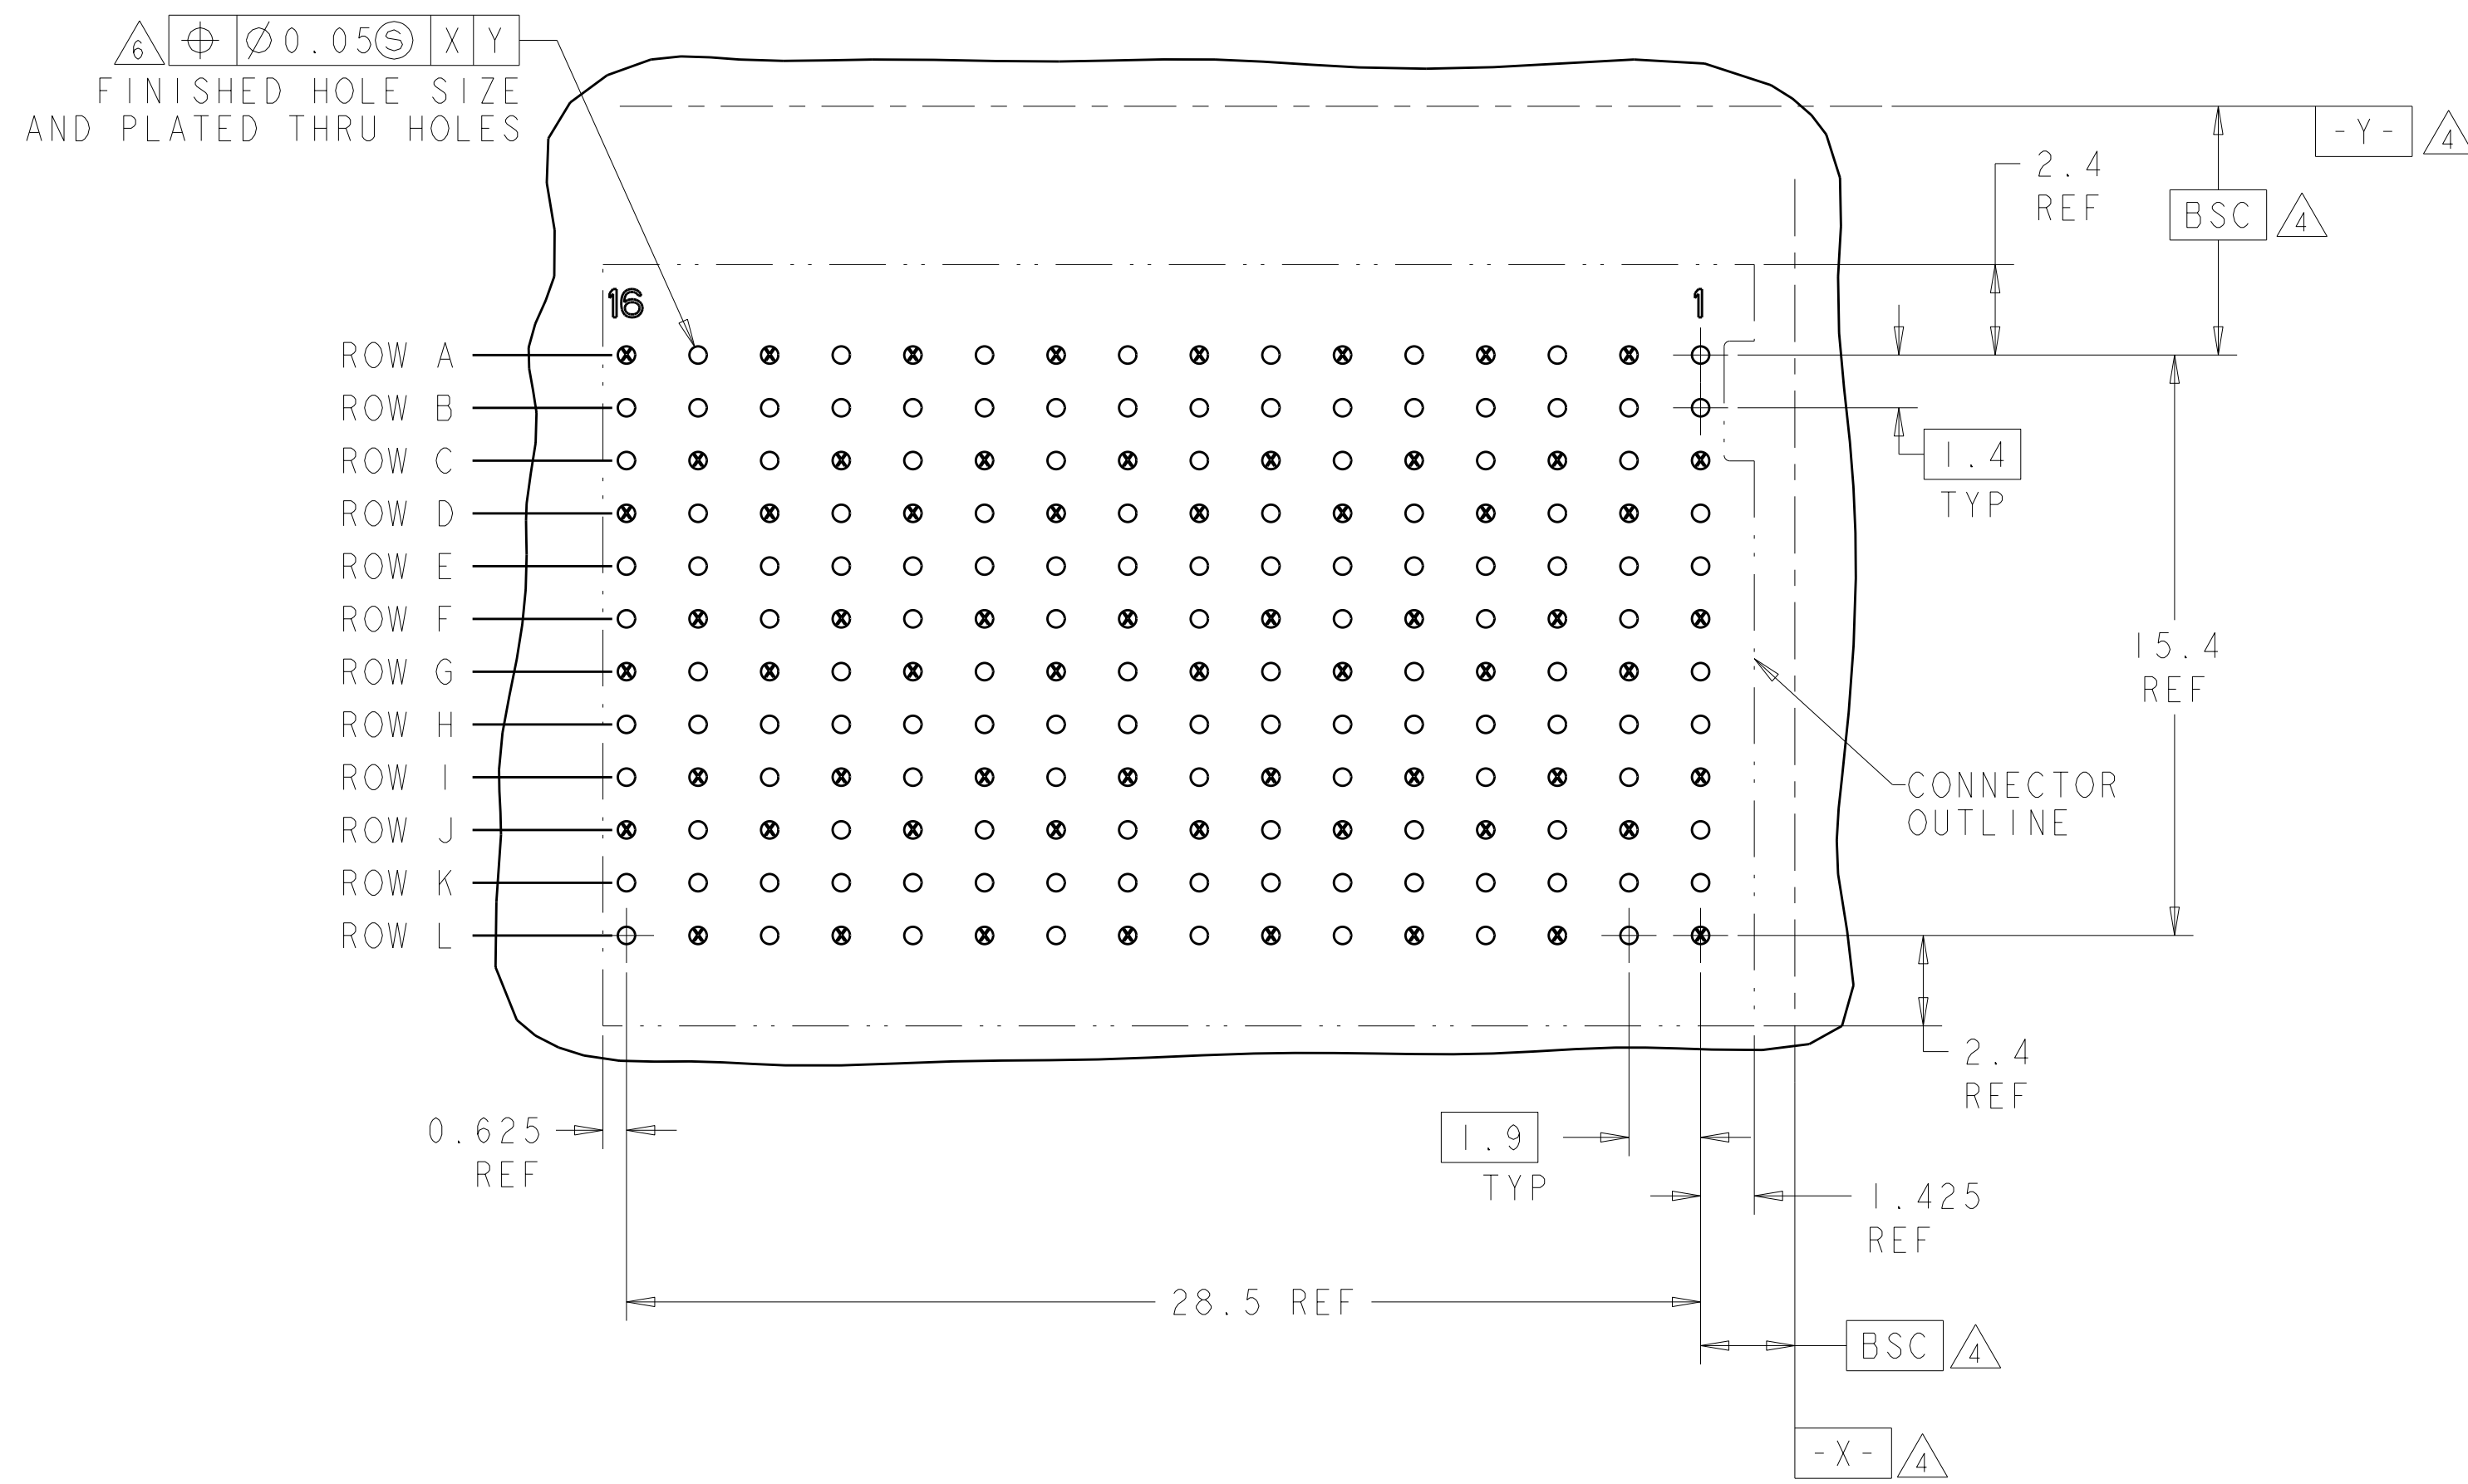

○ = SIGNAL
⊗ = GROUND
RECOMMENDED PC BOARD
LAYOUT BACKPLANE,
COMPONENT SIDE SHOWN
SCALE 6:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: 23MAR2012 W. SOURCEBEEF CWC: 23MAR2012 R. PATTERSON		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 4 PLC ± ANGLES ±		NAME: HEADER ASSEMBLY, OPEN ENDED, 4 PAIR 16 COLUMN TinMan	
		PRODUCT SPEC APPLICATION SPEC		SIZE: CAGE CODE: DRAWING NO: RESTRICTED TO:	
MATERIAL: 		FINISH: 		WEIGHT: - A100779C-2187307	
CUSTOMER DRAWING				SCALE: 8:1 SHEET 1 OF 1 REV: A	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2187307-1](#)