


HP LDD Indust X7R HT200C, Ceramic, 0.1 uF, 10%, 50 VDC, X7R, Commercial, High Temperature, Lead Spacing = 5.08mm

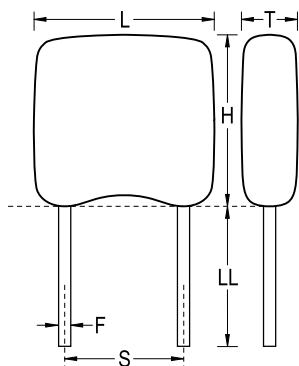

Dimensions	
L	7.62mm MAX
H	7.62mm MAX
T	3.81mm MAX
S	5.08mm +/-0.762mm
LL	3.175mm MIN
F	0.635mm +0.102/-0.051mm

Packaging Specifications	
Packaging:	Waffle, Tray

General Information	
Series:	HP LDD Indust X7R HT200C
Style:	Radial
Description:	Commercial, High Temperature
Features:	LDD High Temperature 200C
RoHS:	No
Prop 65:	WARNING: Cancer and reproductive harm - www.p65warnings.ca.gov .
REACH:	SVHC (Pb – CAS 7439-92-1)
Termination:	Nickel
AEC-Q200:	No

Specifications	
Capacitance:	0.1 uF
Capacitance Tolerance:	10%
Voltage DC:	50 VDC
Temperature Range:	-55/+200°C
Temperature Coefficient:	X7R