



Bestückungsplan - *contact layout*


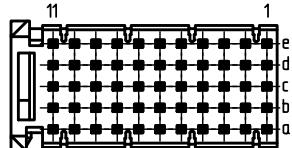


■ = bestückt - *assemble*

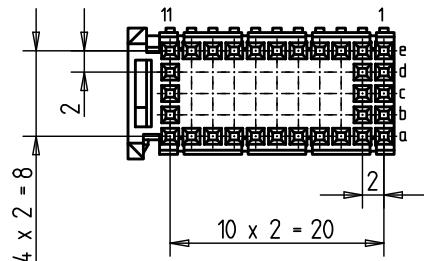


EE-Zone für
durchkontaktierte
Löcher $\phi 0.6 \pm 0.05$

*Compliant zone for
thru hole
 $\phi 0.6 \pm 0.05$*

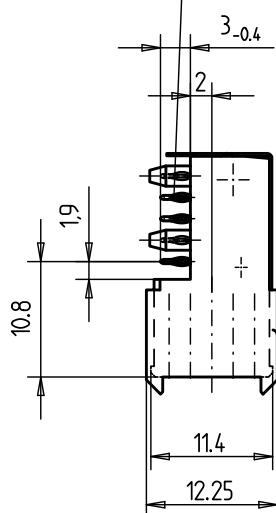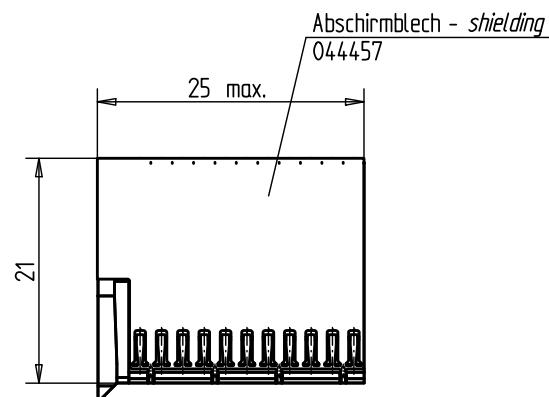

Lochbild für Leiterplatte
(Bestückungsseite)

*Board hole pattern
(Component mounting side)*

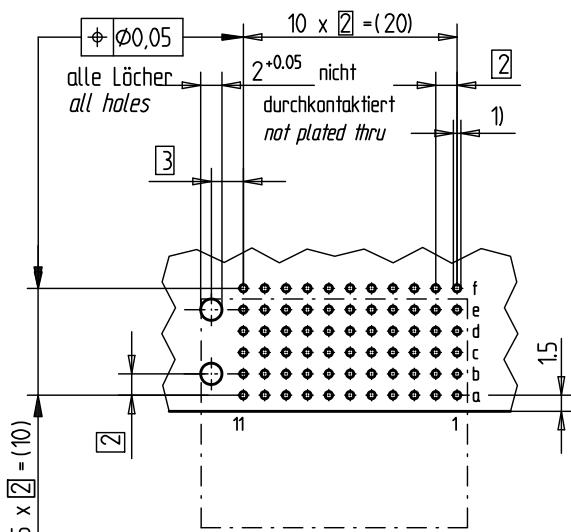

1) $\phi 0.6 \pm 0.05$ Durchmesser des metallisierten Loches
 $\phi 0.6 \pm 0.02$ Diameter of finished plated-through hole
 $\phi 0.7 \pm 0.02$ Bohrungsdurchmesser des Loches
 $\phi 0.7 \pm 0.02$ Diameter of drilled hole

Schichtaufbau im metallisierten Loch
siehe Zeichnung 114406

*Metal plating of plated-through hole
see drawing 114406*

Fehlende Masse und Angaben nach IEC 61076-4-101
Missing information and dimensions per IEC 61076-4-101

Bedruckung siehe Zeichnung 401194
Marking see drawing 401194

Information: Abschirmblech oben montiert / shielding mounted on top BA 2	Tolerances	Scale 2:1
Consider protection memo from DIN 34	All Dimensions in mm	
All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Subject to modification without prior notice. Drawing will not be updated.	Designation
		ERmet Federleiste C ERmet Female Type C
b Index	02.06.2010 Date	354150 I
	V:00069856.SZA	ERMC

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[354150](#)