
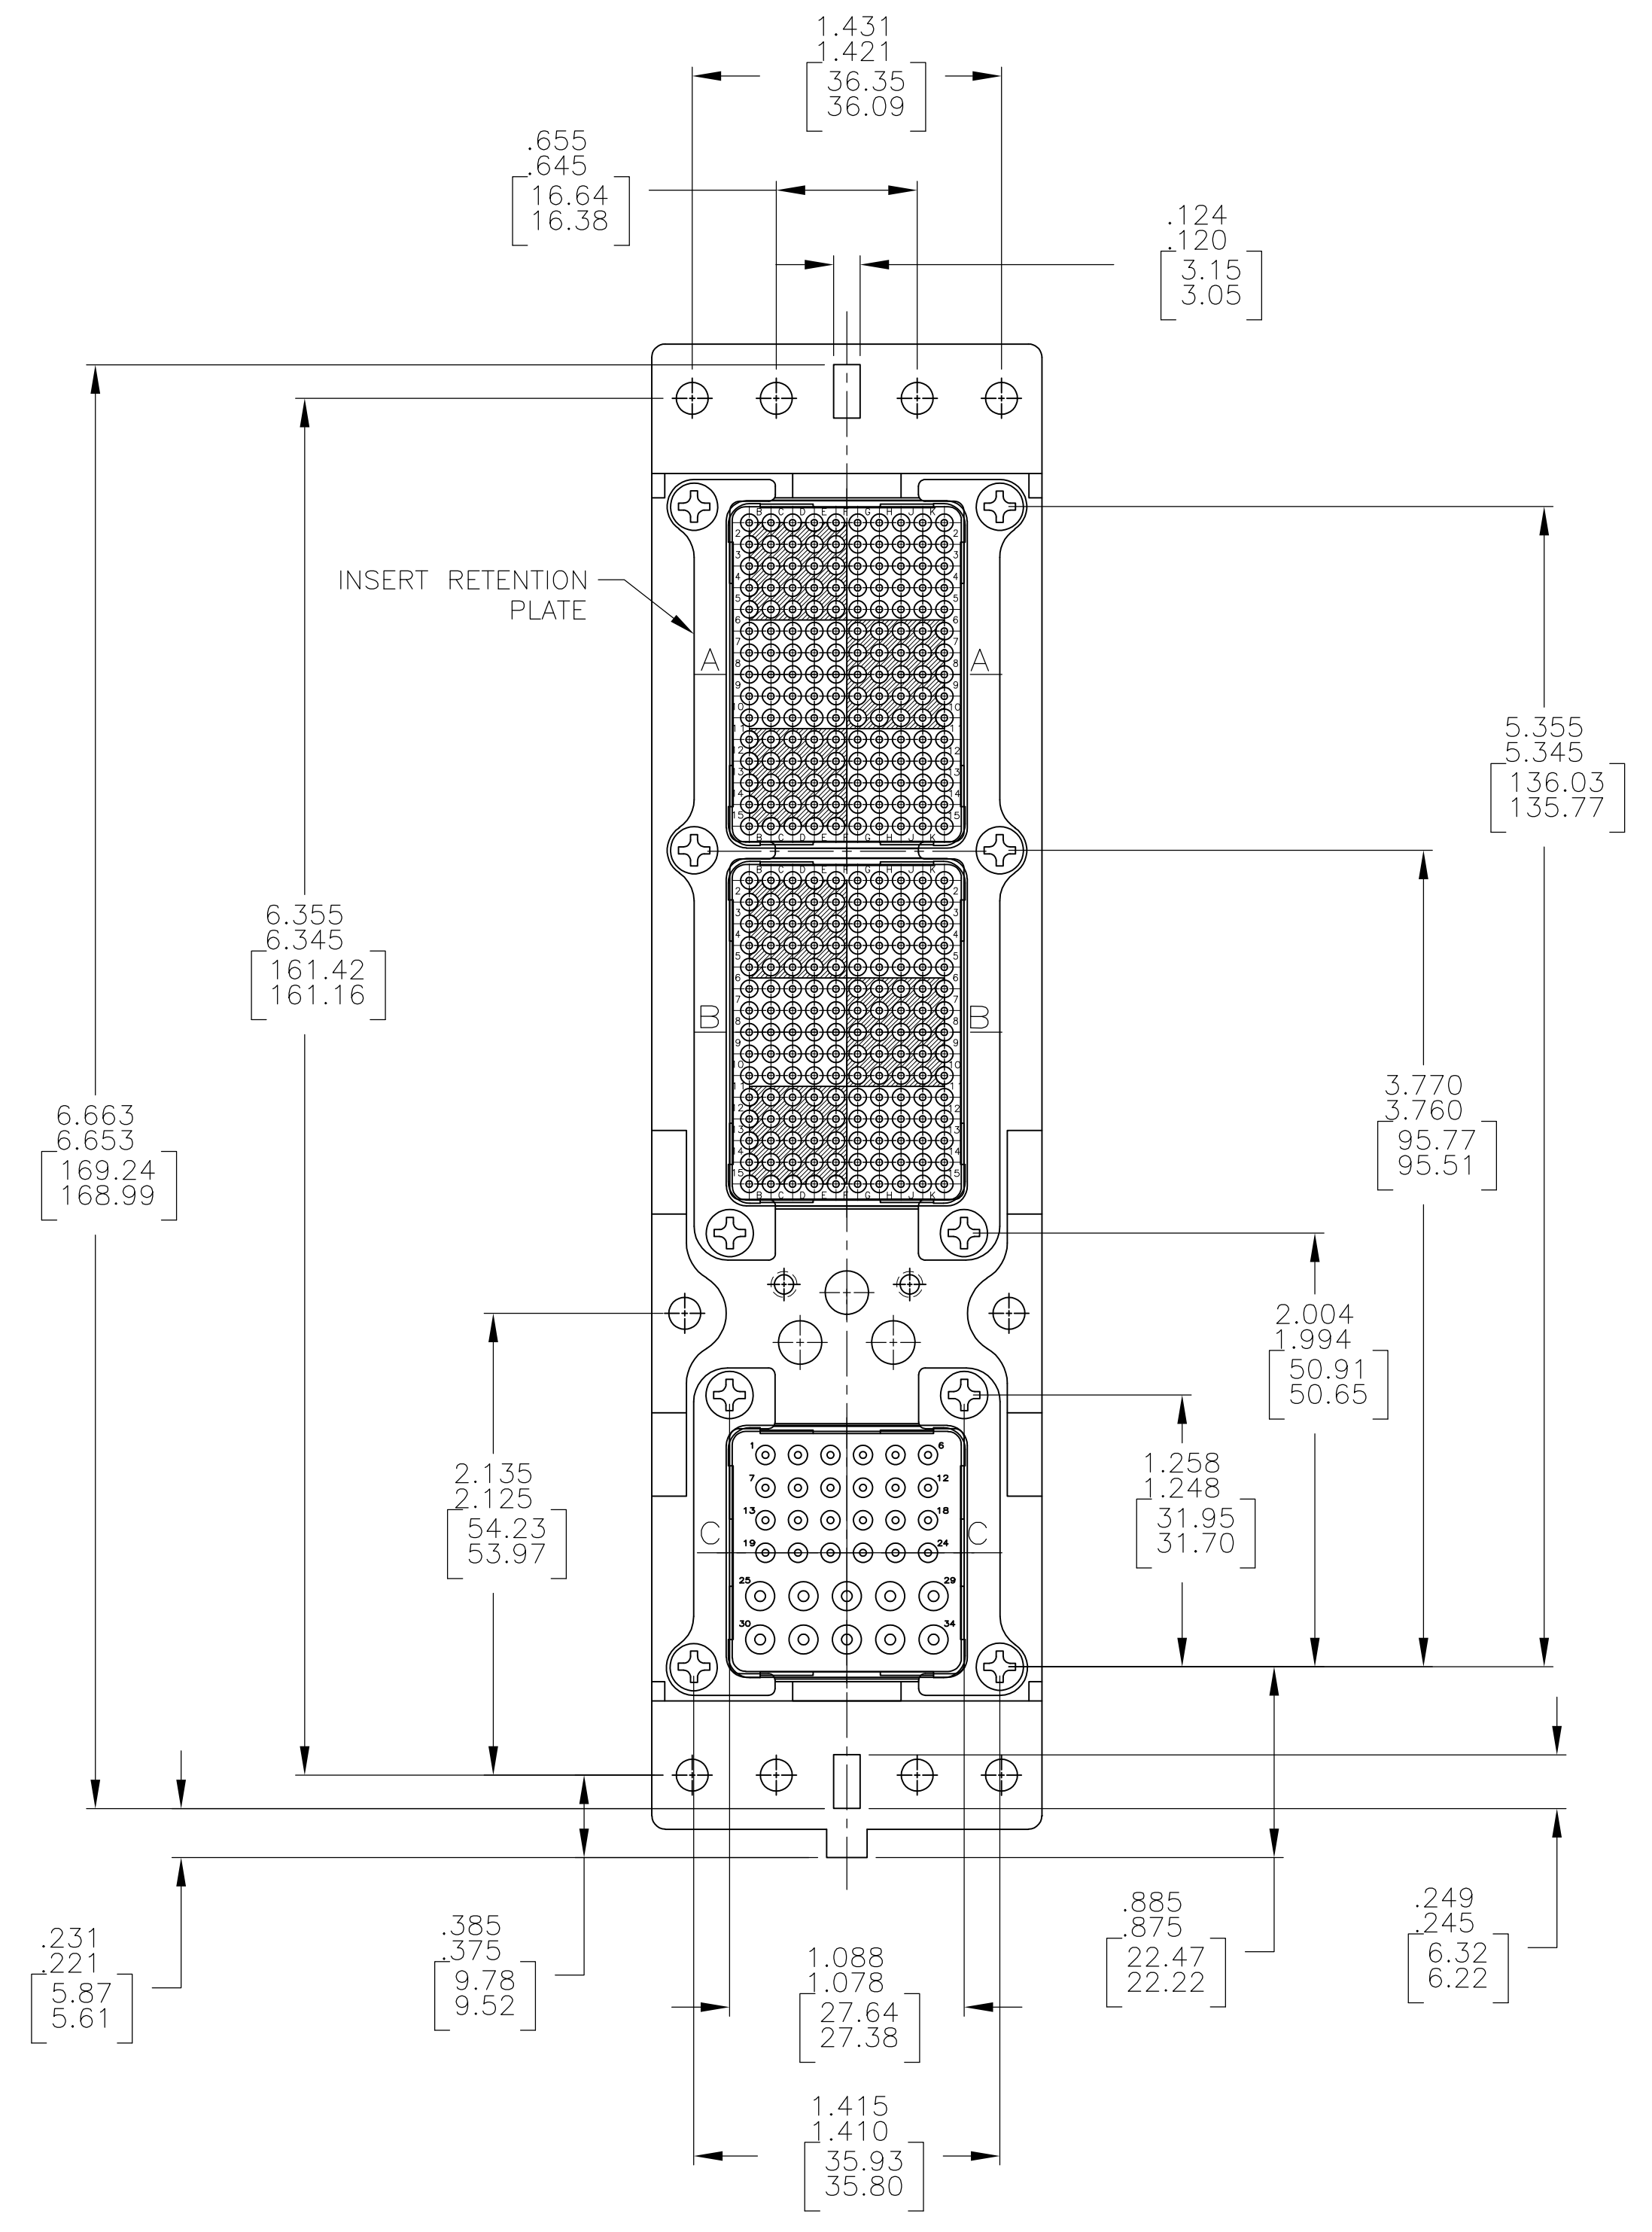
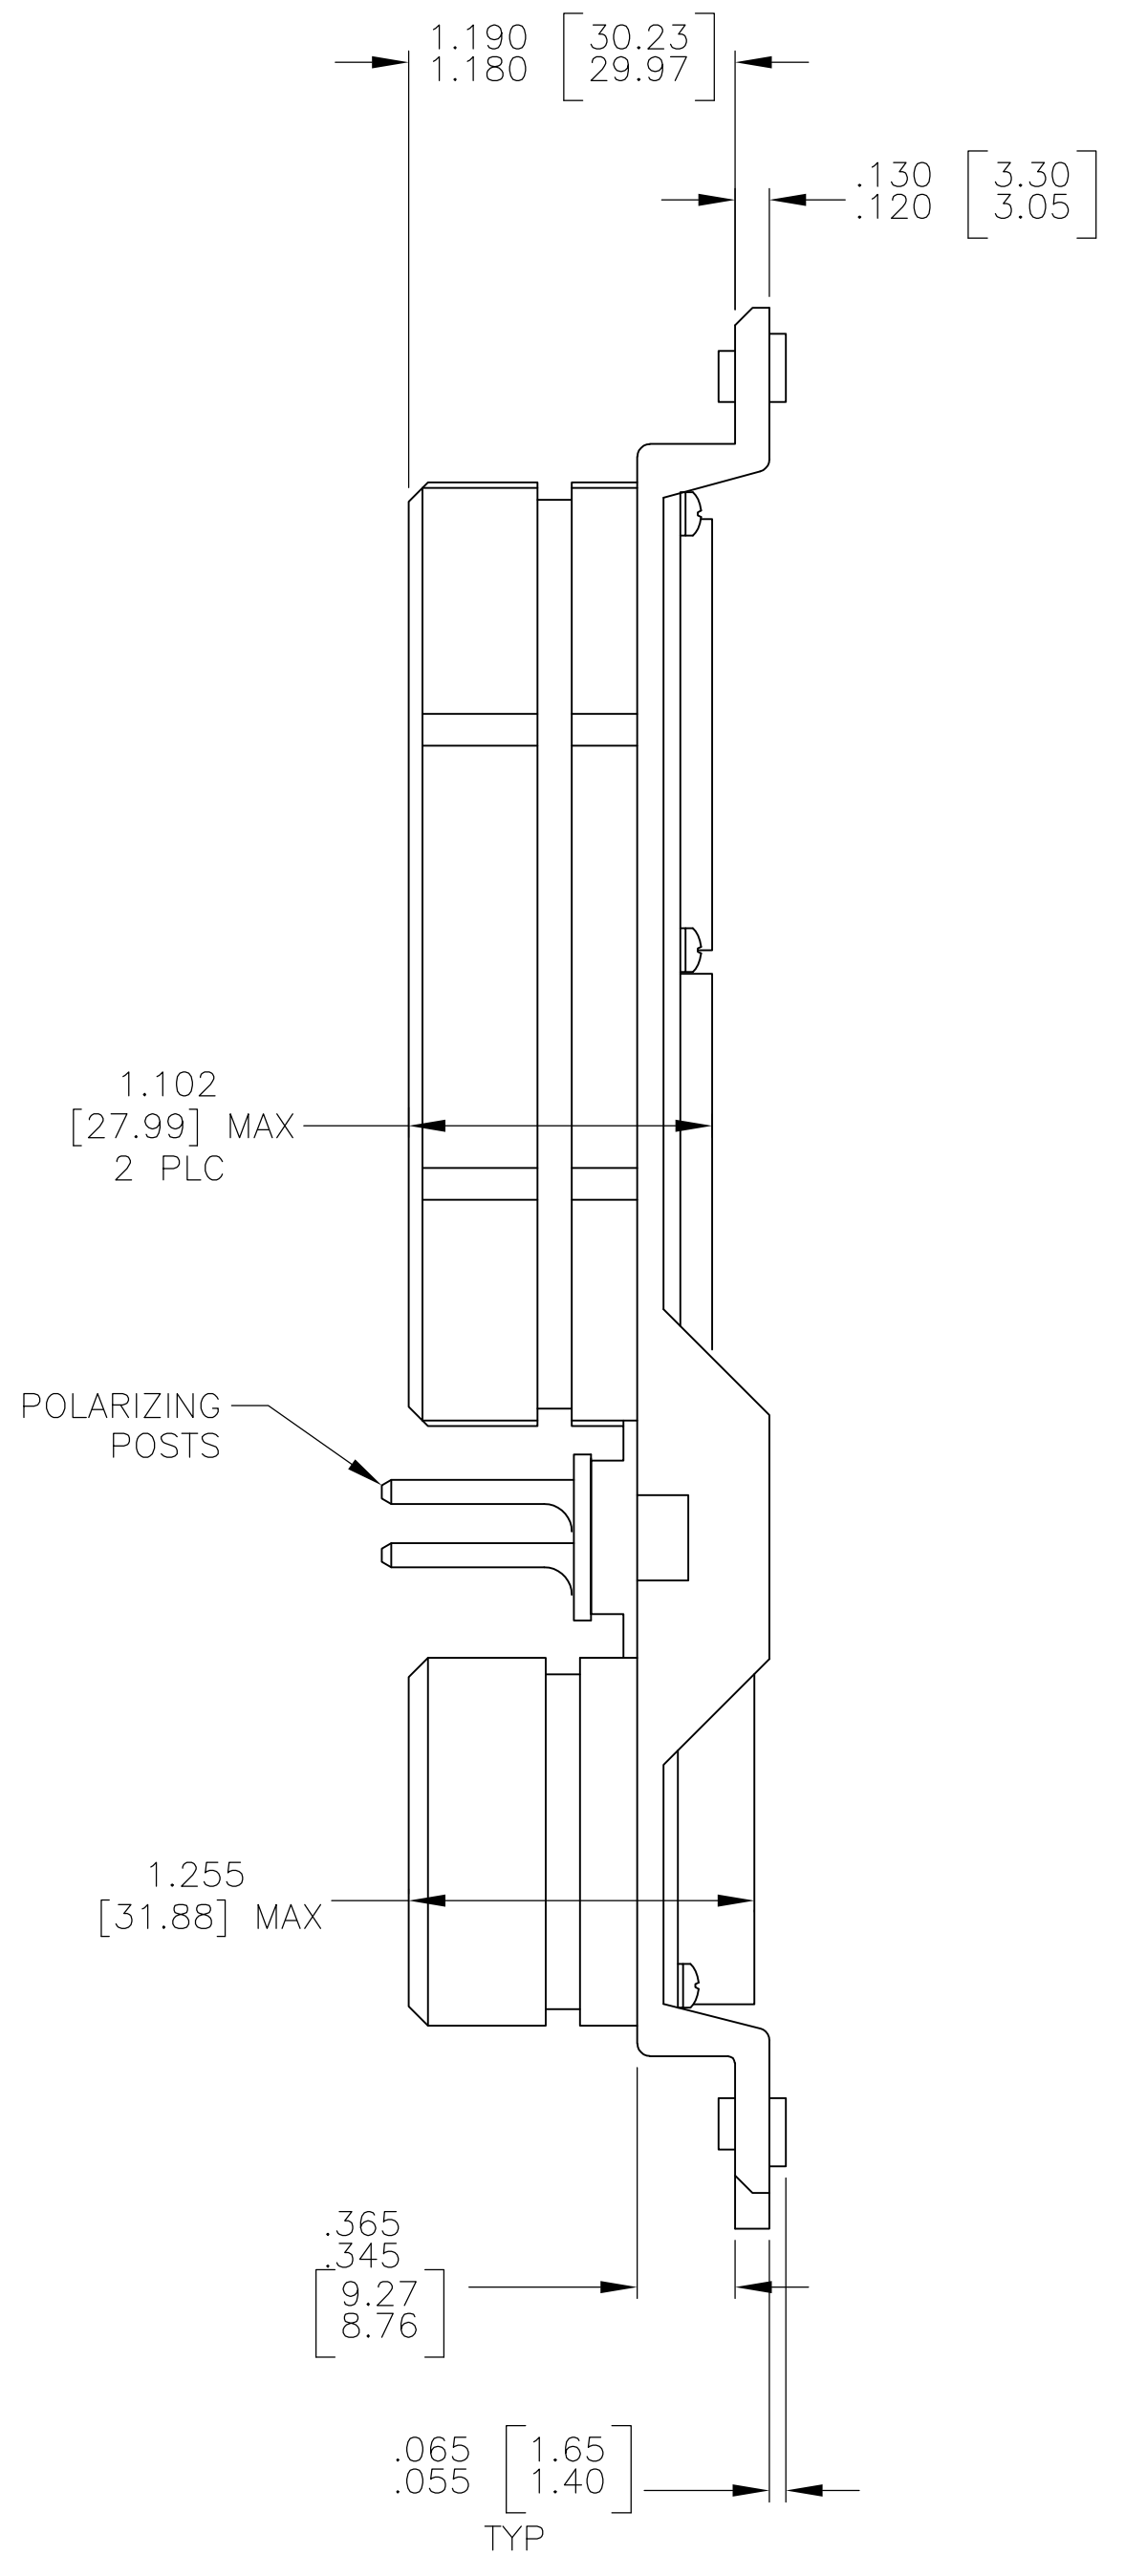


D

C

B

A

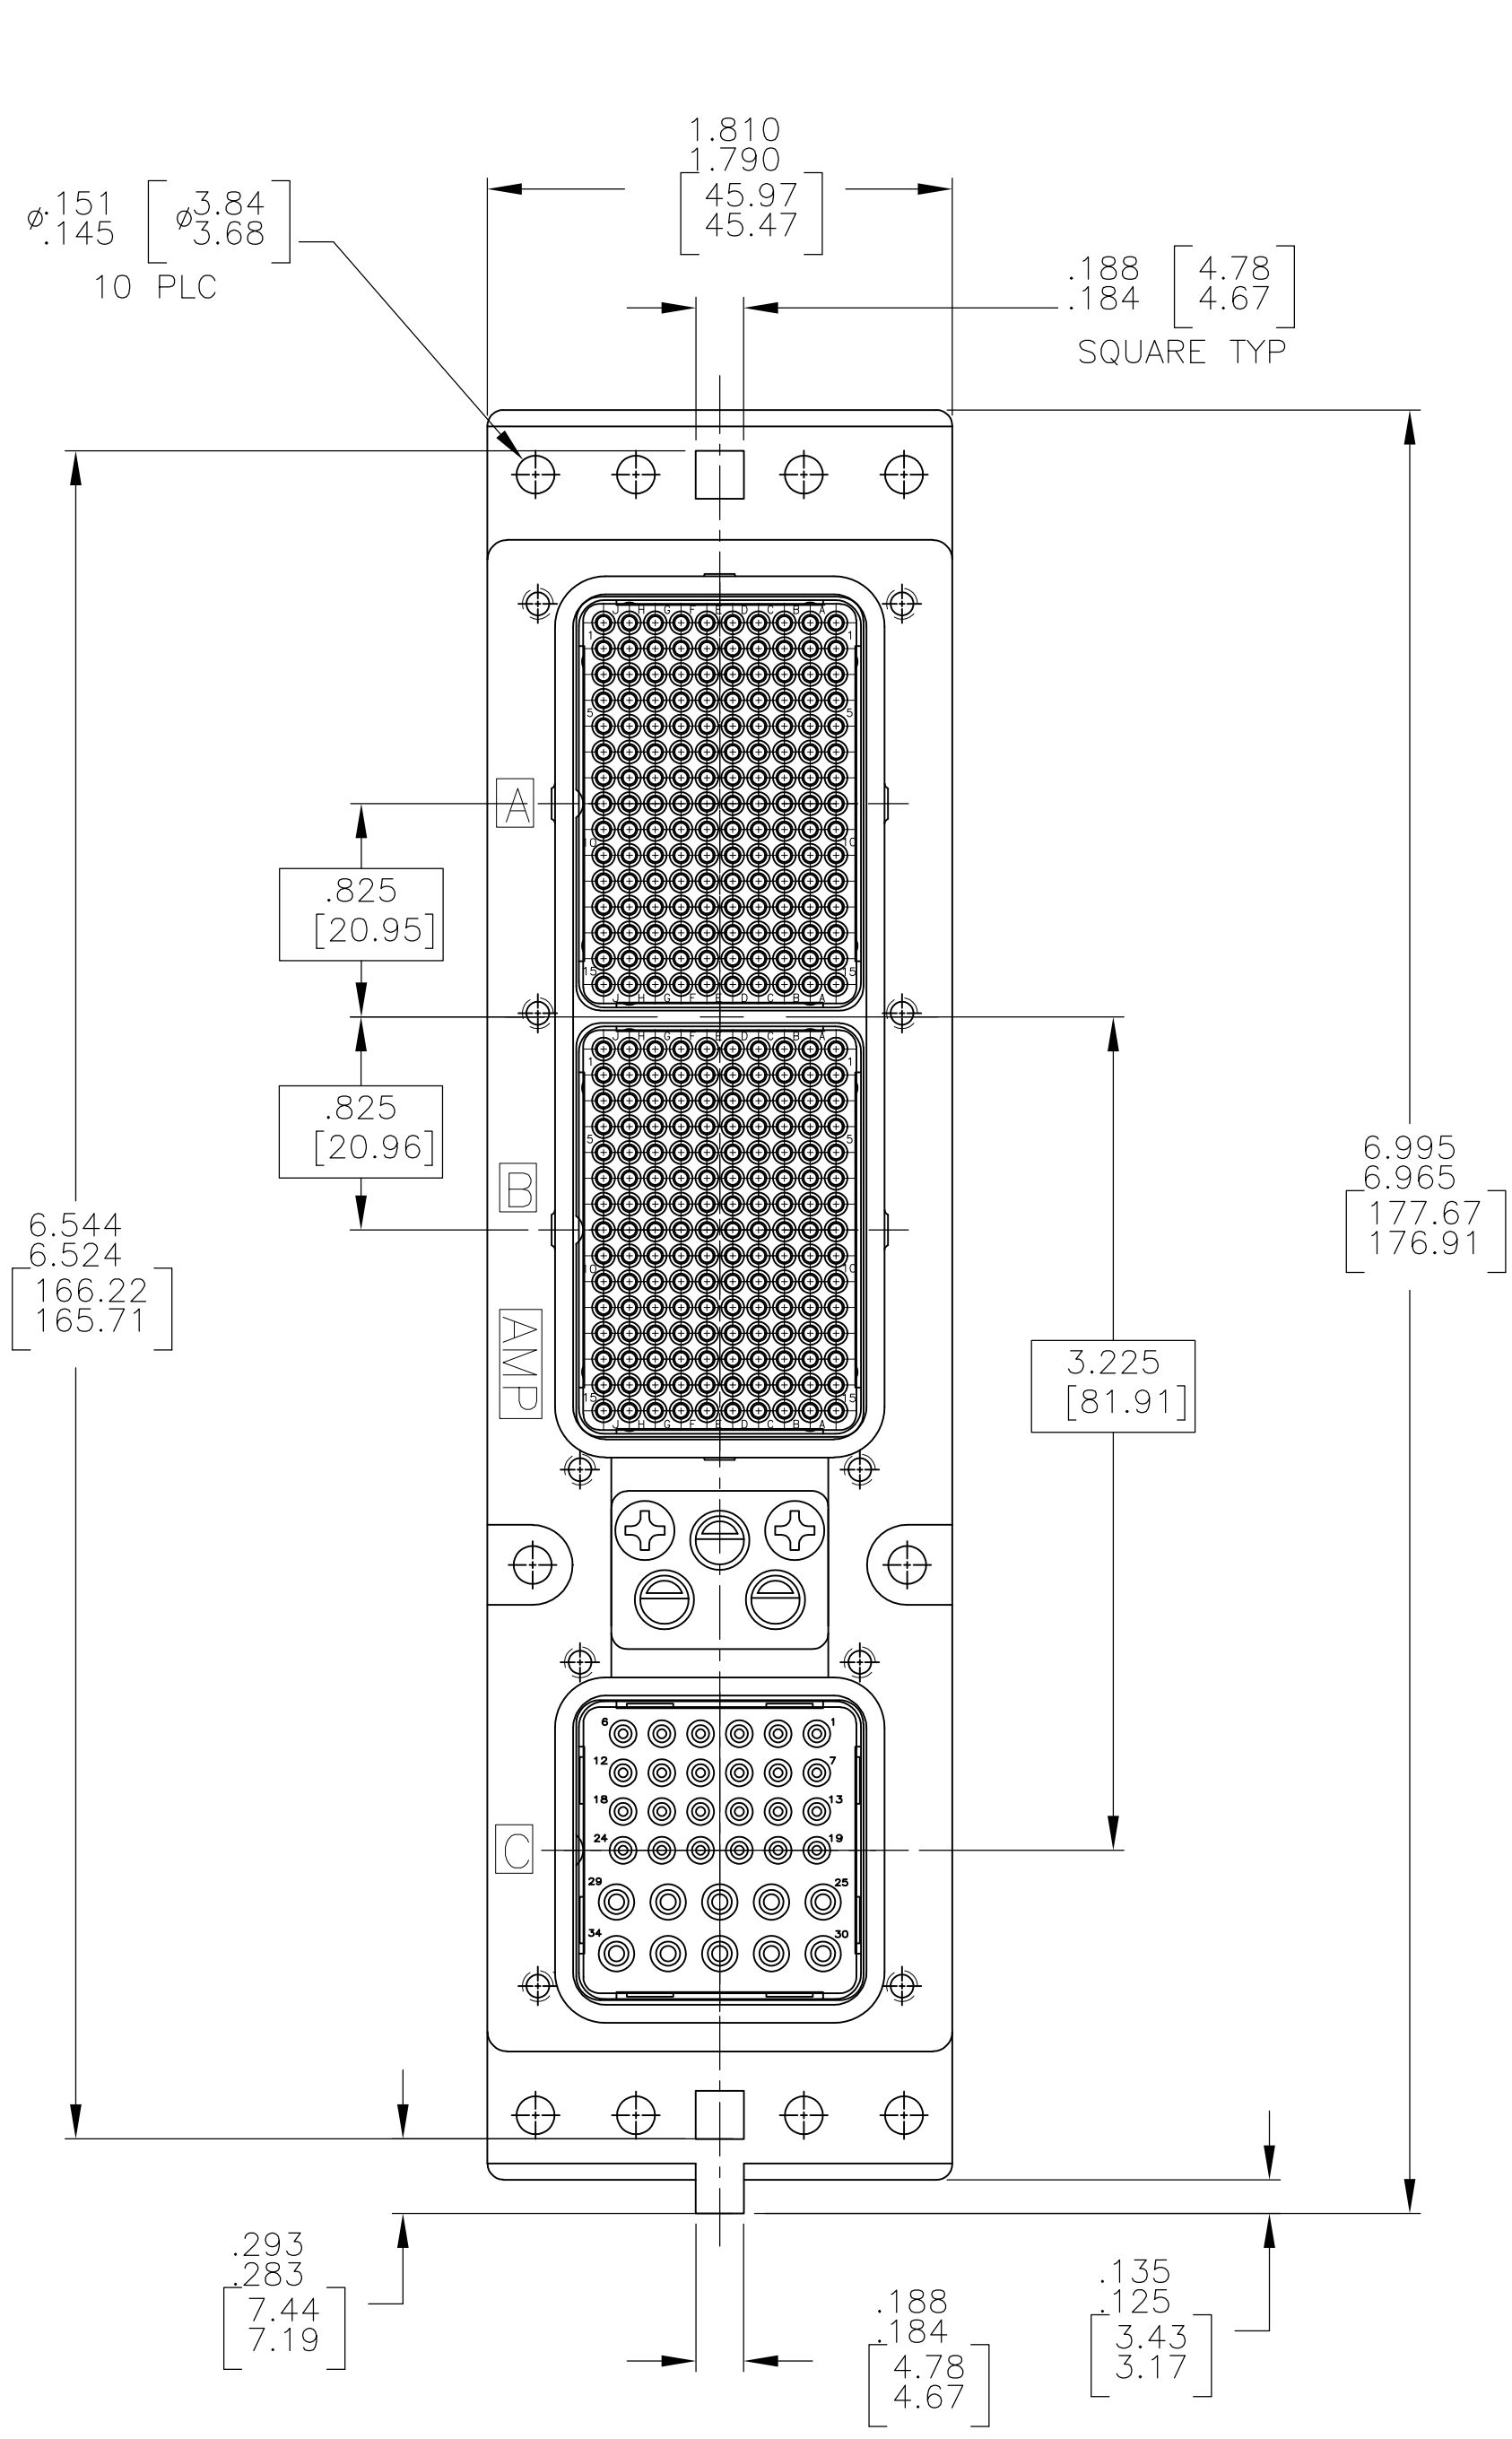

- CONNECTOR DIMENSIONS ARE PER ARINC 600 SPECIFICATION
- FOLLOWING CONTACTS ARE INCLUDED AND NOT LOADED:
SIZE 22 PIN CONTACT: TE P/N 208262-3; QTY: 300
SIZE 16 SOCKET CONTACT: TE P/N 208270-2; QTY: 10
SIZE 20 SOCKET CONTACT: TE P/N 208267-2; QTY: 24
- KEYING SHOWN IN POSITION "01" FOR REFERENCE ONLY. SEE TABLE FOR KEYING POSITION. FOR POSITION "00" KEYING SHIPPED UNASSEMBLED.
- DUST COVER IS INCLUDED AND INSTALLED FOR SHIPPING. (NOT SHOWN)

COMPONENT	MATERIAL	FINISH
SHELL	DIE CAST ALUMINUM PER ASTM-B-85	CHEMICAL COVERSION PER MIL-C-5541
RETENTION PLATES	ALUMINUM ALLOY PER ASTM-B-209	CHEMICAL COVERSION PER MIL-C-5541
SCREWS AND LOCKWASHERS	STEEL OR STAINLESS STEEL	CHROMATE OVER ZINC OR PASSIVATED
POLARIZING POSTS	ZINC ALLOY PER ASTM-B-86	ELECTROLESS NICKEL PER MIL-C-26074 CLASS 4, GRADE B
INSERTS	THERMOSET	—
POLARIZING POST RETAINING PLATE	ALUMINUM ALLOY PER ASTM-B-209	BLUE ANODIZED PER MIL-A-8625

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL
SEE TABLE

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± .005
1 PLC ± .005
2 PLC ± .005
3 PLC ± .005
4 PLC ± .005
ANGLES ± .5°

FINISH
SEE TABLE

DWN C.C.THOMAS 1-11-11
CHK K.THACKSTON 1-11-11
APVD K.THACKSTON 1-11-11

PRODUCT SPEC
—
APPLICATION SPEC
—
WEIGHT
—

CUSTOMER DRAWING

NAME
PLUG ASSY, SIZE 2, ARINC 600,
(150/150/34)

SIZE
A1

CAGE CODE
00779

DRAWING NO
2157236

RESTRICTED TO
—

SCALE 1:1

SHEET 1 OF 1

REV B

"01"

KEYING POSITION

2157236-1

PART NUMBER

TE Connectivity

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2157236-1](#)