


THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.




LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50		A1	REVISED PER ECR-09-014283	26JUN09	HMR	KR

D

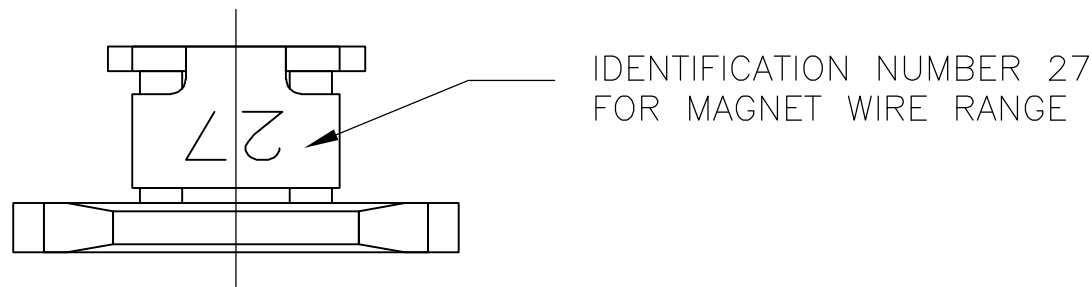

- 1 SLOT TERMINATES A SINGLE OR DOUBLE MAGNET WIRE OF THE SAME SIZE AND TYPE.
COPPER RANGE: #19-#17 AWG
- 2 AFTER INSERTION INTO PLASTIC HOLDER TAB PORTION MUST BE BENT OVER 45° TO 90° OR POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.
- 3 SPECIAL CAVITY ANVIL HEIGHT REQUIRED .130±.003 REF APPLICATION SPEC 114-2046, SEC. 3.2, NOTE 7
- 4 .000080 - .000250 TIN PLATE

C

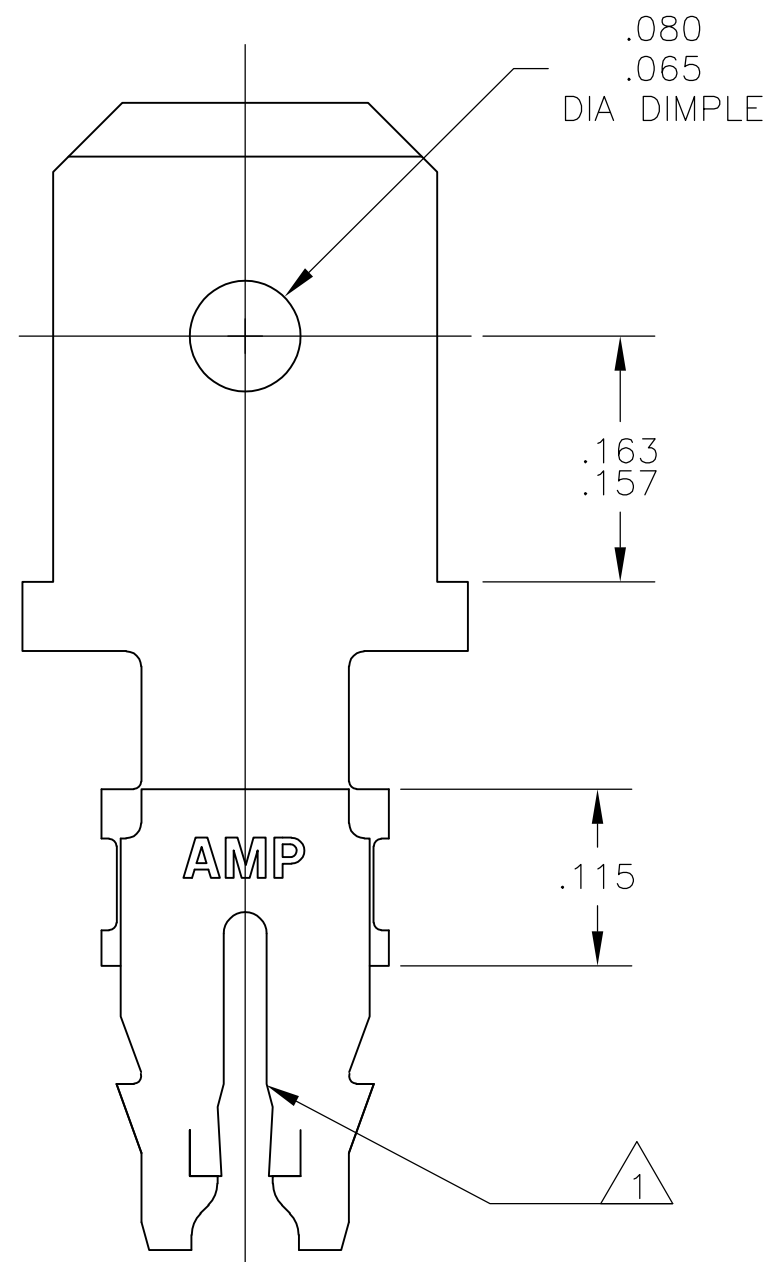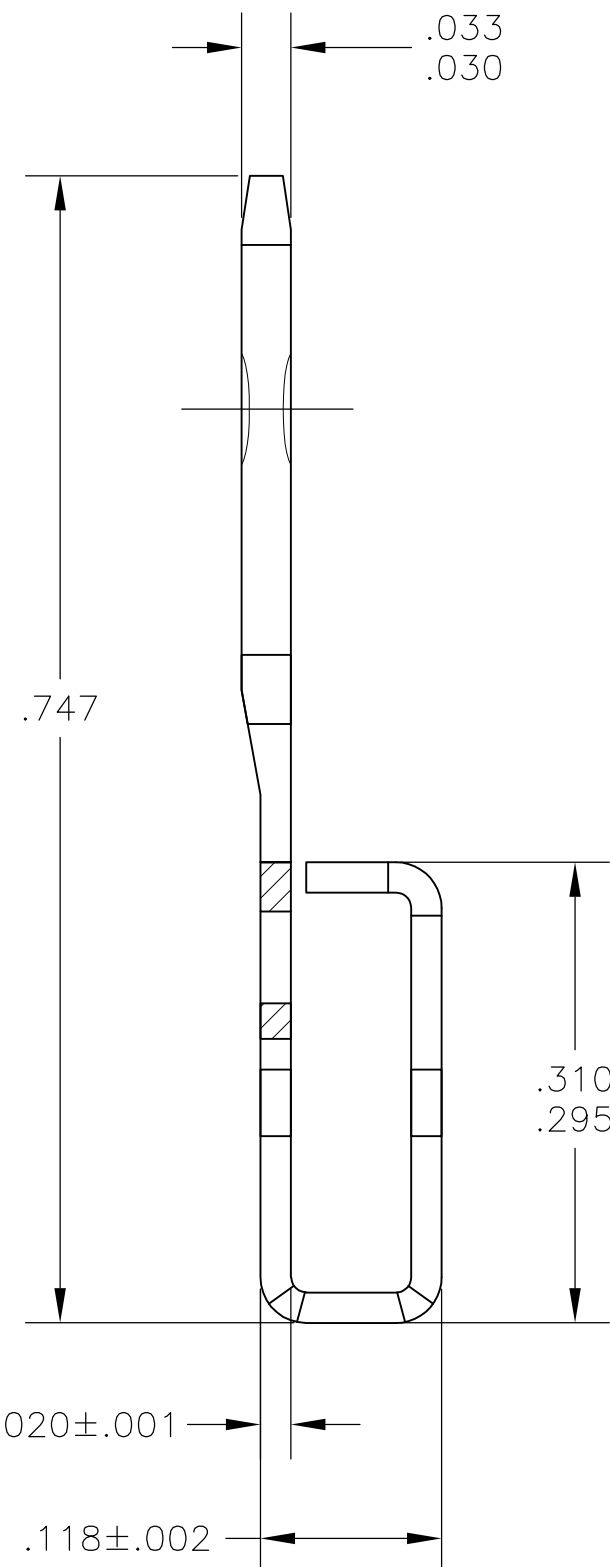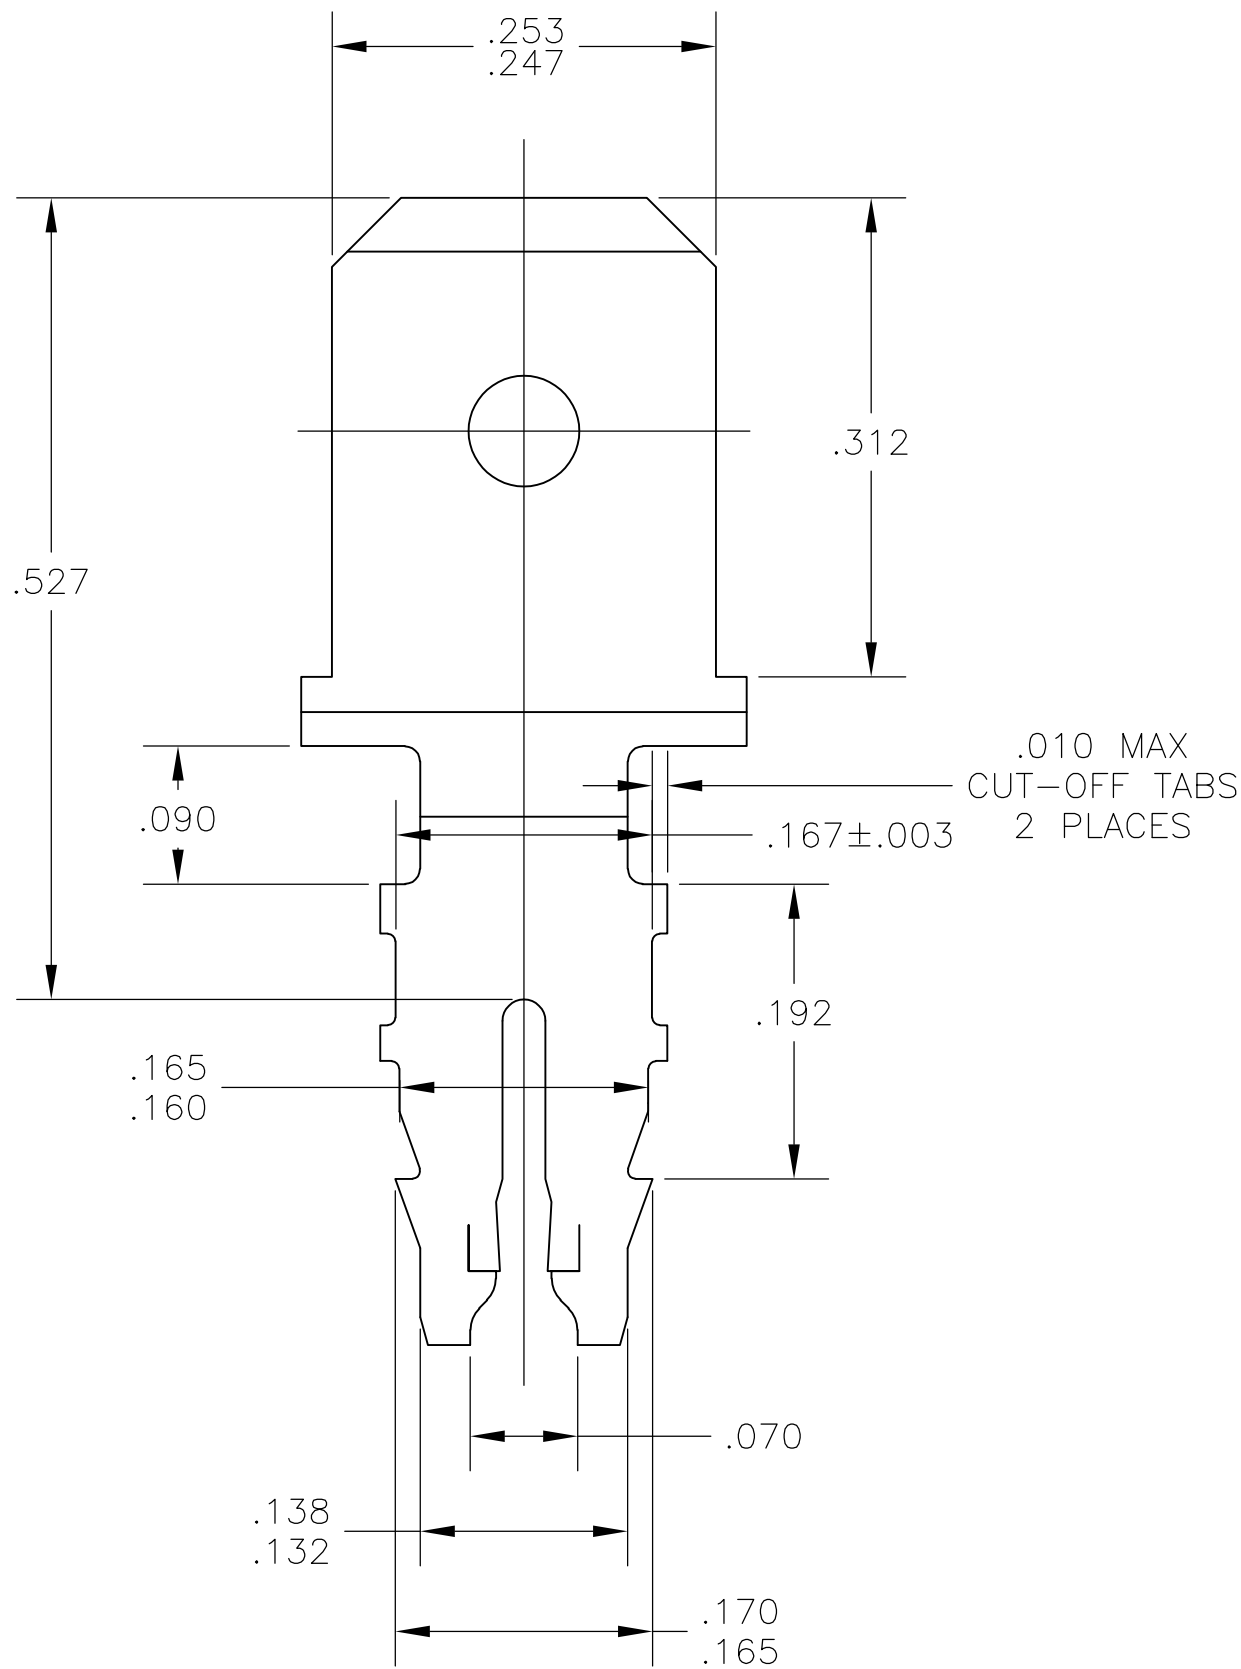

B

A

1742490

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.S. FEHER 23OCT2006	Tyco Electronics Corporation Harrisburg, PA 17105-3608			
DIMENSIONS: INCHES		CHK K.A. RANDOLPH 23OCT2006				
		APVD K.A. RANDOLPH 23OCT2006	NAME			
		PRODUCT SPEC 108-2012	TERMINAL, TAB, .250 FASTON, LOOSE PIECE, 300 SERIES MAG-MATE			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC 114-2046 3	SIZE A2	CAGE CODE 00779	DRAWING NO C=1742490	RESTRICTED TO -
MATERIAL 4M PRE-MILLED BRASS		FINISH 4	WEIGHT -	SCALE 10:1	SHEET 1 of 1	REV A1
CUSTOMER DRAWING						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1742490-1](#)