

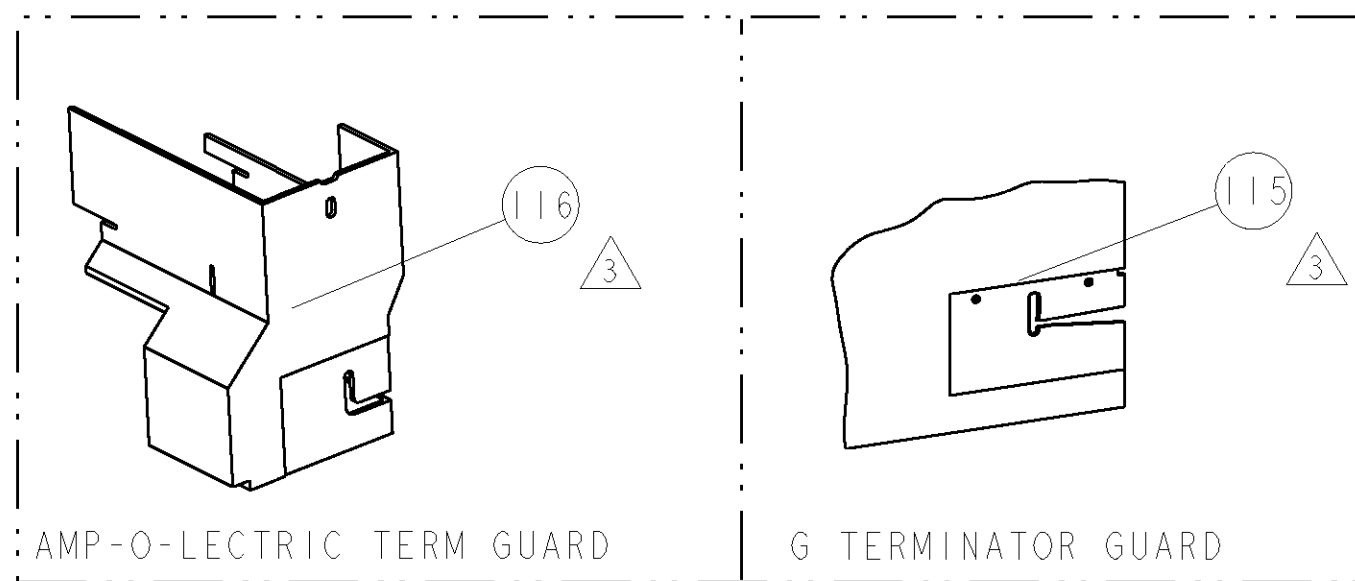
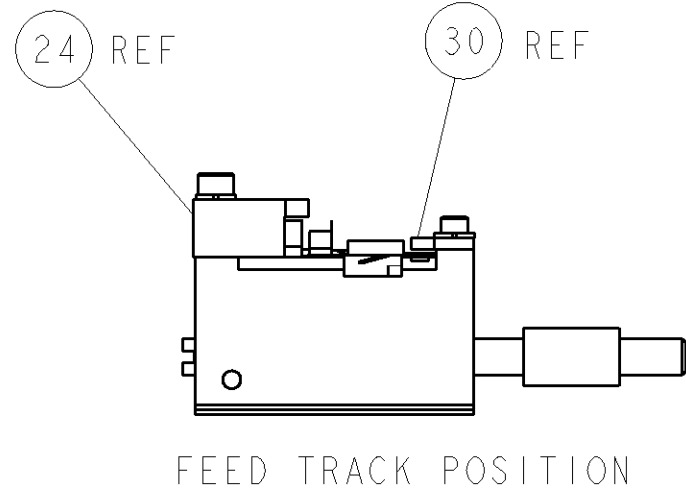


8				7			
THIS DRAWING IS UNPUBLISHED.				RELEASED FOR PUBLICATION			
© COPYRIGHT 20				20			
BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.							
PART NUMBER	REV	FIRST USED	POWER UNIT	FEED TYPE	DESCRIPTION		
1852435-1	A	122500-1	LEADMAKER	POST FEED	CUTS CARRIER		
1852435-2	A	565435-5	BENCH MODEL K	PRE FEED	CUTS CARRIER		
1852435-3	A	354500-1	BENCH MODEL G	PRE FEED	CUTS CARRIER		
1852435-6	A	122500-1	LEADMAKER	POST FEED	CONTINUOUS CARRIER		
7-1852435-7	A	-	-	-	SPARE PARTS		

- △ RECOMMENDED SPARE PARTS
△ GREASE LIGHTLY
△ GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE

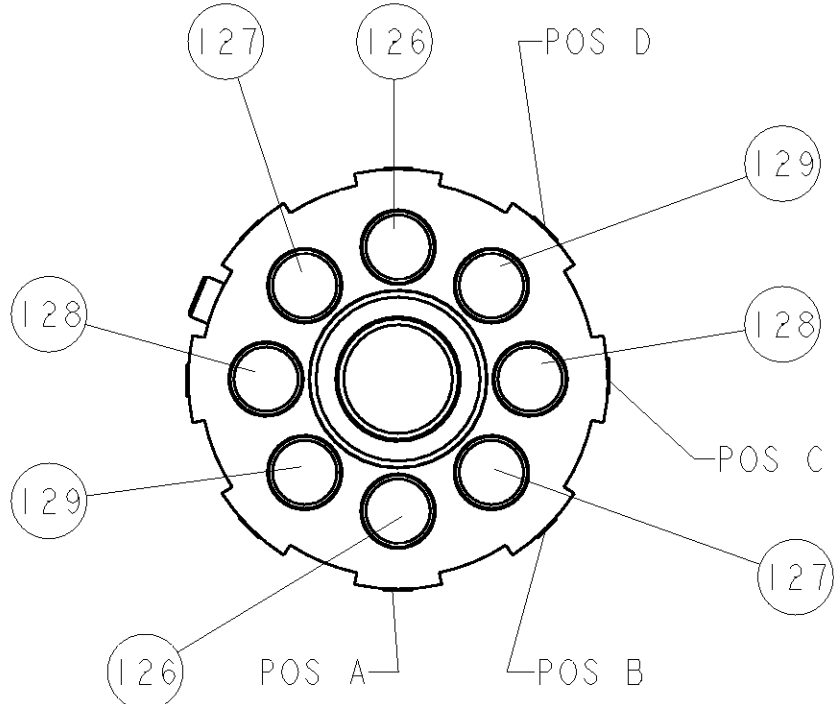

TERMINAL NAME: FLAT BLADE, SERIES 2176					
TYCO PN	MOLEX PN	MOLEX TERMINAL - MOLEX CRIMP SPECS			
1949291	05-06-0301				
-	-	PAD LTR	CRIMP HEIGHT	WIRE SIZE	
-	-	A	.057±.001[1.45±0.03mm]	16AWG	
-	-	B	.051±.001[1.30±0.03mm]	18AWG	
-	-	C	.049±.001[1.24±0.03mm]	20AWG	
-	-	D	.047±.001[1.19±0.03mm]	22AWG	
-	-	CRIMP	SIZE	TYPE	RANGE
-	-	WIRE	.080 [2.03mm]	F	22-16 AWG
-	-	INSUL	.140 [3.56mm]	F	Ø.140 MAX
WIRE STRIP LENGTH .140 - .187	TERM APPL SPEC NONE	FEED .592	APPLICATOR INSTRUCTIONS 408-8040		SET UP GAGE 458637-1

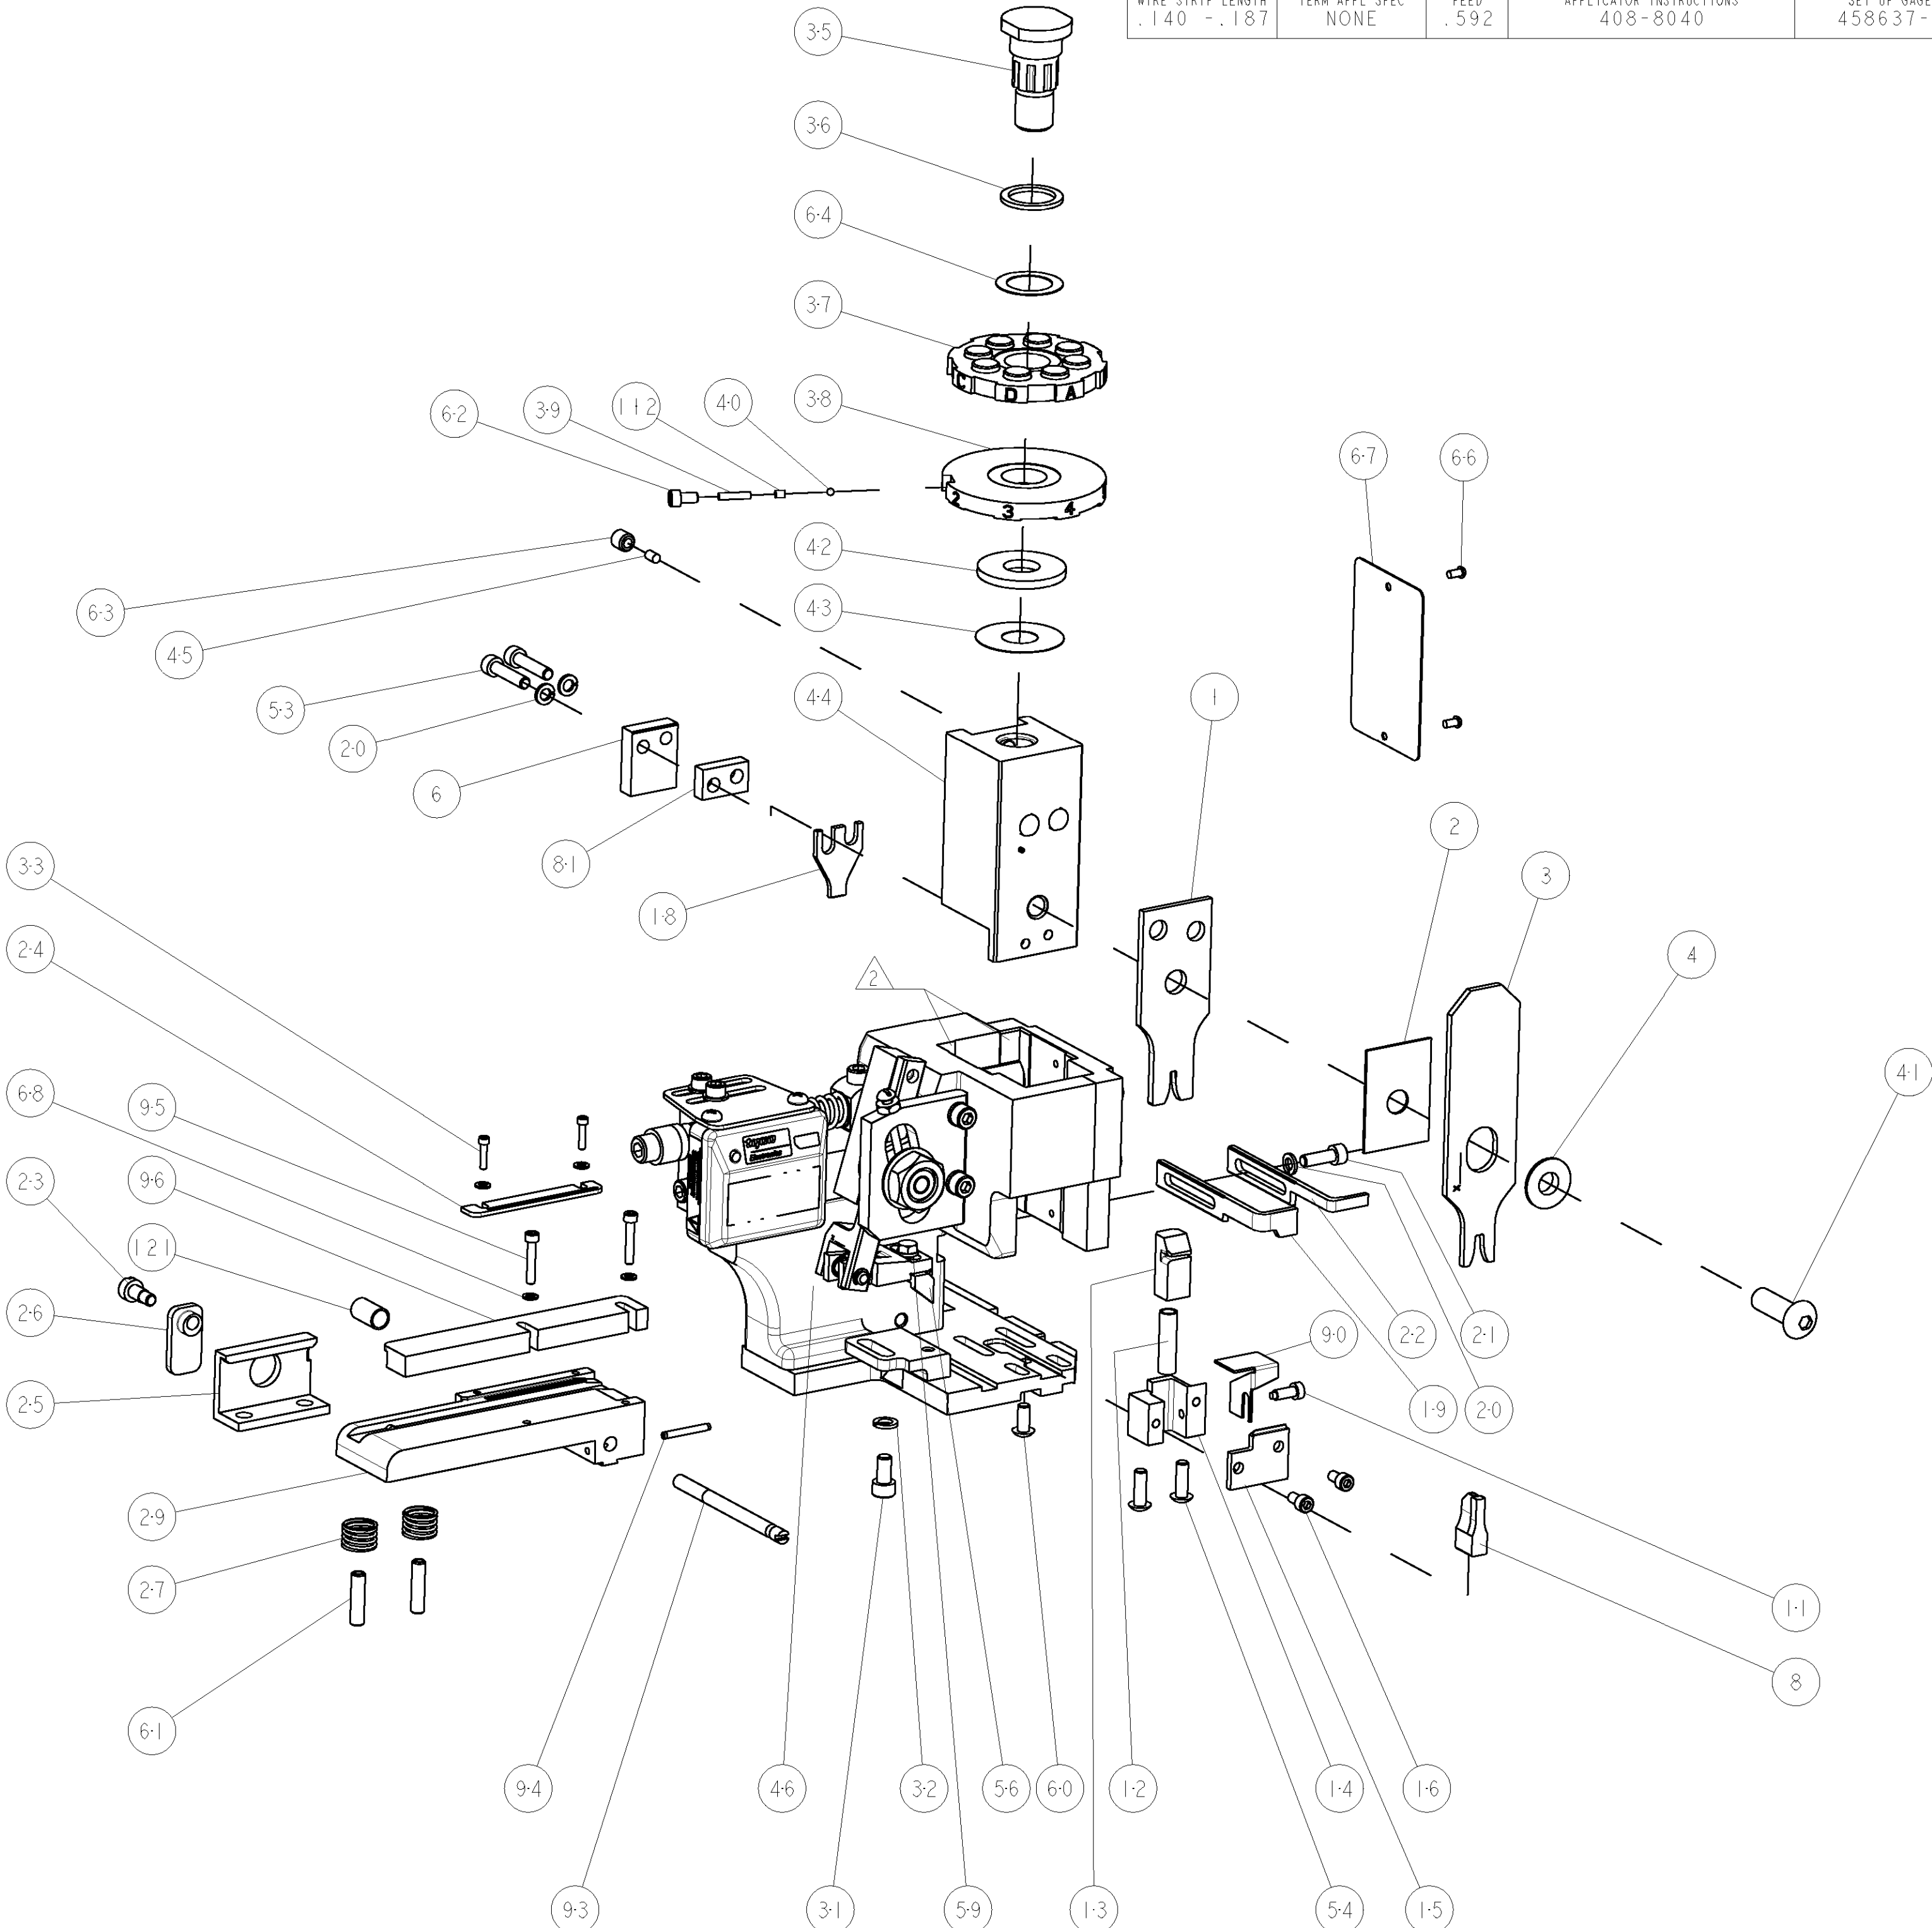

LOC		DIST		REVISIONS			
A		66		P LTR	DESCRIPTION	DATE	DWN
				A	RELEASED	27MAR2007	RK
							GB

-	2	2	2	2	-	3-354779-5	PIN, WIRE DISC, .3165	129
-	2	2	2	2	-	3-354779-2	PIN, WIRE DISC, .3150	128
-	2	2	2	2	-	2-354779-8	PIN, WIRE DISC, .3130	127
-	2	2	2	2	-	1-354779-6	PIN, WIRE DISC, .3070	126
-	1	1	1	1	-	1-22281-8	SPRING, COMPRESSION	121
-	-	-	REF	-	..	455749-1	GUARD WINDOW	116
-	-	REF	-	-	..	679532-1	INSERT, GUARD	115
-	1	1	1	1	-	690603-1	SPRING ASSIST AMP-O-MATOR APPLICATOR	112
-	1	1	1	1	-	2-690487-9	GUIDE, FRONT STRIP	96
-	2	2	2	2	-	1-21000-6	SCR, SKT HD CAP 4-40 X .625	95
-	1	1	1	1	-	4-21028-0	PIN, SLOTTED SPRING .094 X .750	94
-	1	1	1	1	-	690432-3	ADJUSTMENT SCREW	93
-	1	1	1	1	-	1-21002-7	SCR, BTN SKT HD CAP 6-32 X .375	91
-	1	1	1	1	-	691668-1	GUARD, REAR CHIP	90
-	1	1	1	1	-	2-240641-9	SPACER	81
-	1	1	1	1	-	4088040	SF APPL INST 408-8040	72
-	1	1	1	1	-	217238-1	GENERAL INSTRUCTION PKG	71
-	4	4	4	4	-	21024-2	WASHER, SPRG LOCK, REG NO 4	68
-	1	1	1	1	-	461264-1	PLATE, IDENTIFICATION	67
-	2	2	2	2	-	21017-2	SCREW, DRIVE	66
-	1	1	1	1	-	986950-1	WASHER, FLAT PRECISION	64
-	1	1	1	1	-	21009-2	SCR, SET, SELF LOCKING 1/4-20 X .250	63
-	1	1	1	1	-	23030-1	SCR, SKT HD CAP 6-32 x .25	62
-	2	2	2	2	-	5-21006-6	SCR, SET, CUP POINT 10-32 X .750	61
-	1	1	1	1	-	22733-8	SCR, BHSC, SELF-LOCKING, 8-32 X .375	60
-	1	1	1	1	-	2-22603-0	SCREW, MACH, HEX HD, 8-32 x .312	59
-	1	1	1	1	-	694433-2	FEED PAWL	56
-	2	2	2	2	-	2-21002-2	SCR, BTN SKT HD CAP 8-32 X .500	54
-	2	2	2	2	-	2-21000-9	SCR, SKT HD CAP 8-32 X .750	53
-	-	1	-	-	..	690602-6	CAM, PRE FEED, 1 5/8	49
-	-	-	1	-	..	690602-5	CAM, PRE FEED, 1 1/8	48
-	1	-	-	1	-	690501-4	CAM, POST FEED, 1 5/8	47
-	1	1	1	1	-	459456-1	APPL. BASIC SUB ASSY (SIDE WISE MOCA)	46
-	1	1	1	1	-	690191-1	PLUG,NYLON	45
-	1	1	1	1	-	455673-1	RAM, SIDE FEED	44
-	1	1	1	1	-	690125-1	SHIM SUB-ASSY	43
-	1	1	1	1	-	690124-1	WASHER, RAM (.115)	42
-	1	1	1	1	-	7-21002-9	SCR, BTN SKT HD CAP 5/16-24 X 1.00	41
-	1	1	1	1	-	23241-6	BALL, STEEL	40
-	1	1	1	1	-	690170-1	SPRING, COMPRESSION	39
-	1	1	1	1	-	690142-1	DISC, INSULATION	38
-	1	1	1	1	-	354777-1	WIRE DISC, ASSEMBLY	37
-	1	1	1	1	-	22480-5	SPRING, COMPRESSION	36
-	1	1	1	1	-	690212-1	POST, RAM	35
-	2	2	2	2	-	1-21000-1	SCR, SKT HD CAP 2-56 X .375	33
-	1	1	1	1	-	21024-5	WASHER, SPRG LOCK, REG NO 10	32
-	1	1	1	1	-	3-21000-4	SCR, SKT HD CAP 10-32 X .375	31
-	1	1	1	1	-	1-844048-1	PLATE, REAR STRIP GUIDE	29
-	2	2	2	2	-	1-22284-0	SPRING, COMPRESSION	27
-	1	1	1	1	-	240793-1	LEVER, DRAG RELEASE	26
-	1	1	1	1	-	240792-1	DRAG, TERMINAL	25
-	1	1	1	1	-	690438-1	FRONT STRIP GUIDE	24
-	1	1	1	1	-	22353-8	SCR, SHLD, SLOT HD, 3/16 DIA	23
-	1	-	-	1	-	690472-2	STRIPPER	22
-	1	1	1	1	-	2-21000-7	SCR, SKT HD CAP 8-32 X .500	21
-	4	4	4	4	-	21024-4	WASHER, SPRG LOCK, REG NO 8	20
-	-	1	1	-	-	691353-1	STRIPPER	19
-	1	1	1	1	-	690518-1	HOLD DOWN, TERMINAL	18
-	2	2	2	2	-	1-21000-8	SCR, SKT HD CAP 6-32 X .250	16
-	1	1	1	1	-	1-690691-0	PLATE,REAR SHEAR	15
-	1	1	1	1	-	690462-1	SHEAR HOLDER, REAR	14
-	1	1	1	1	-	690463-1	FLOATING SHEAR, REAR	13
-	1	1	1	1	-	3-22280-3	SPRING, COMPRESSION	12
-	1	1	1	1	-	690461-1	STOP, SHEAR	11
-	1	1	1	1	-	2-1633109-3	ANVIL, COMBINATION .080	8
-	1	1	1	1	-	690468-1	DEPRESSOR SHEAR, REAR	6
-	1	1	1	1	-	238009-4	BLOCK, FL CRIMPER SPACER	4
-	1	1	1	1	-	3-683453-1	CRIMPER, INSULATION PREMIUM	3
-	1	1	1	1	-	455888-7	SPACER, CRIMPER	2
-	1	1	1	1	-	1-456405-8	CRIMPER, WIRE PREMIUM	1

-77 -6 -3 -2 -1 U/M						PART NO	DESCRIPTION				ITEM NO
THIS DRAWING IS THE PROPERTY OF TYCO ELECTRONICS CORPORATION. IT IS TO BE USED FOR THE PURPOSES SPECIFIED ONLY. NO OTHER REPRODUCTION OR DISTRIBUTION IS PERMITTED WITHOUT THE WRITTEN PERMISSION OF TYCO ELECTRONICS CORPORATION. SHOULD BE CONTACTED FOR THE LATEST REVISION.						DWN R. KNEPPER 27MAR2007	tyco Electronics Tyco Electronics Harrisburg, PA 17105-3608				
CHK G. BAILEY 27MAR2007						APVD T. BENCHOFF 10MAR2007	NAME				
DIMENSIONS: INCHES						PRODUCT SPEC	SIDE FEED HDM APPLICATOR				
TOLERANCES UNLESS OTHERWISE SPECIFIED:						APPLICATION SPEC	-				
9 PLC ±.1						WEIGHT	SIZE				
1 PLC ±0.1						A1	CAGE CODE				
2 PLC ±0.01							DRAWING NO				
3 PLC ±0.001						00779				©=1852435	
4 PLC ±0.001						CUSTOMER DRAWING					
ANGLES ±.1						SCALE				3:5	
FINISH						SHEET				1	OF
MATERIAL						REV				A	
-											

CUSTOMER VIEWABLE ASSEMBLY

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1852435-2](#)