

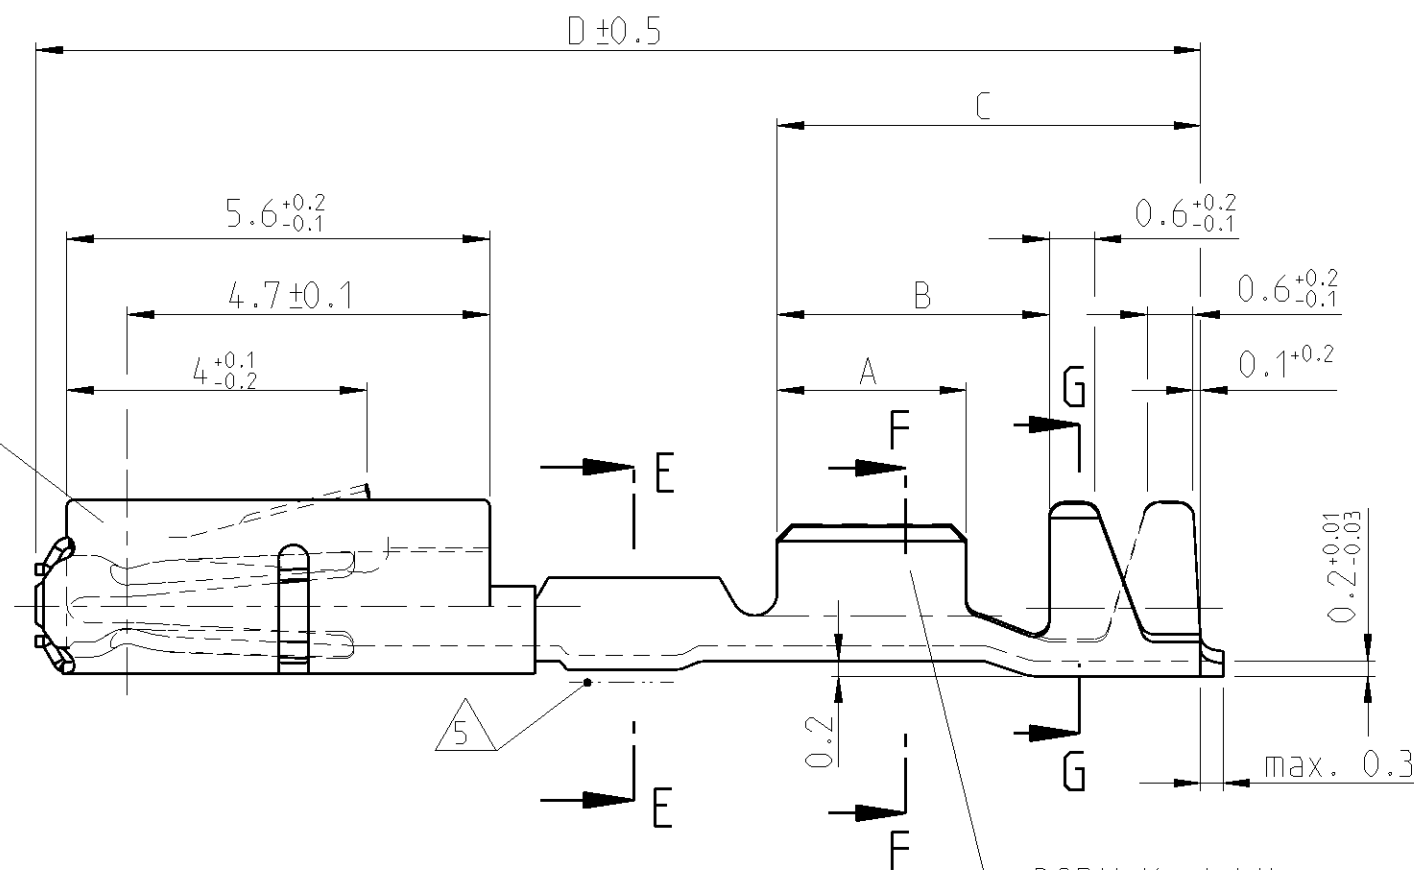


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
A1	-		D	E-10-013839	29JUN2010	Kirs	Brun
			D1	PN 5- -1 ADDED (ECR-11-000520)	08DEC2010	Abr	Brun
			D2	NEW ProE DRAWING (ECR-11-009831)	24OCT2011	Abr	Brun
			D3	LP Variants removed. ECR-13-015135	27SEP2013	Abr	Brun


SPRING/Ueberfeder
MATERIAL: X10CrNi 18 8
EN 10088-2
SURFACE/Oberflaeche: PLAIN/blank

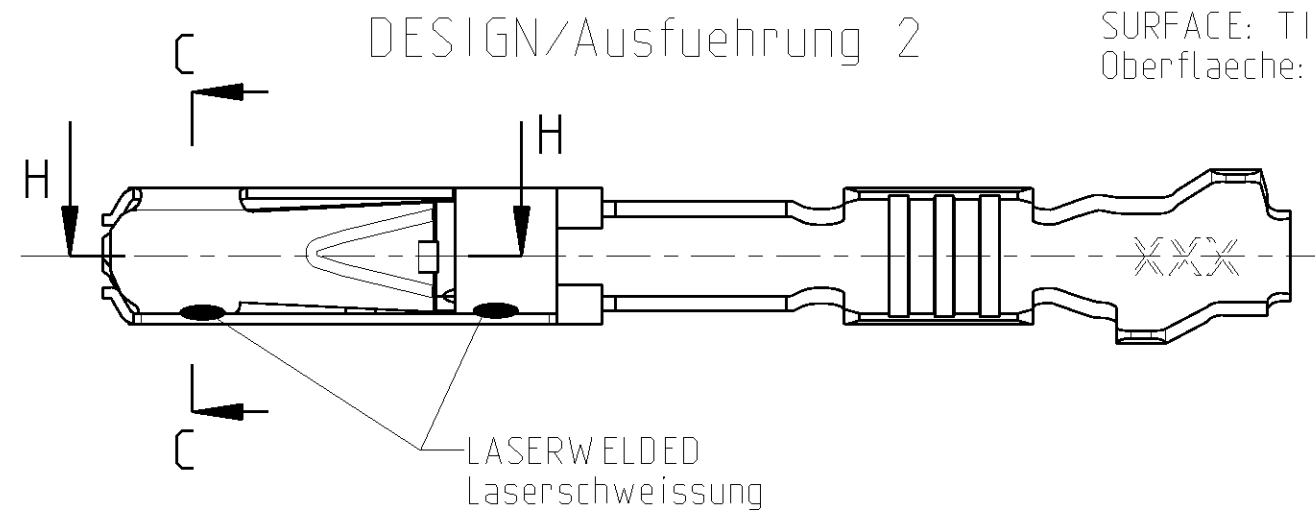

—BODY/Kontaktkoerper
MATERIAL: CuNiSi
SURFACE: TINNED
Oberflaeche: verzinkt

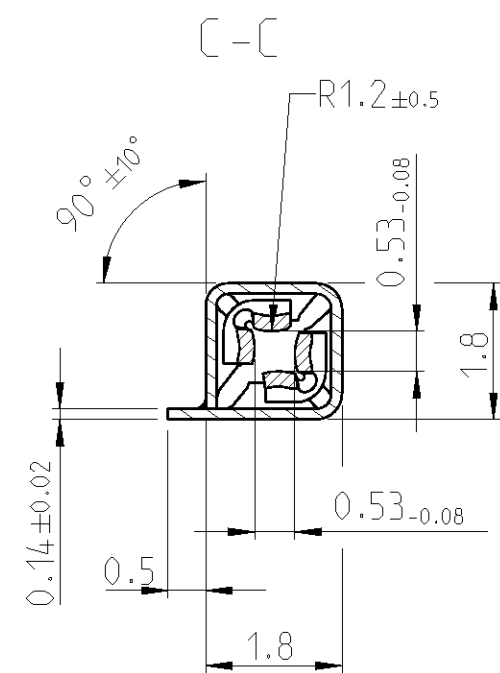


—LASERWELDED
Laserschweissung

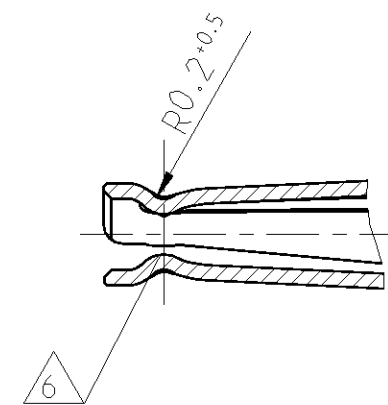


H-H

WITHOUT SPRING
ohne Ueberfeder

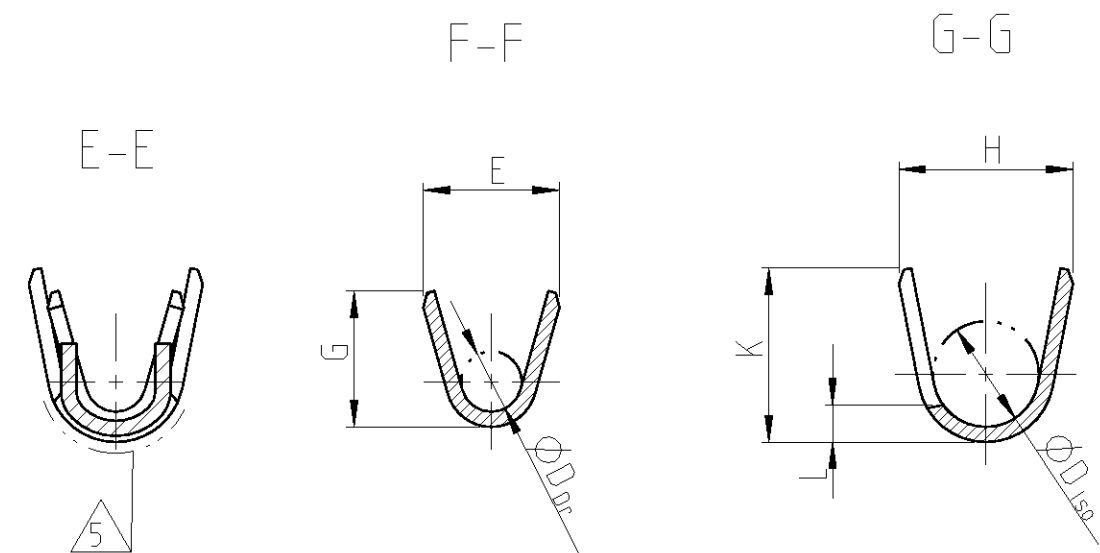


DESIGN/Ausführung 1

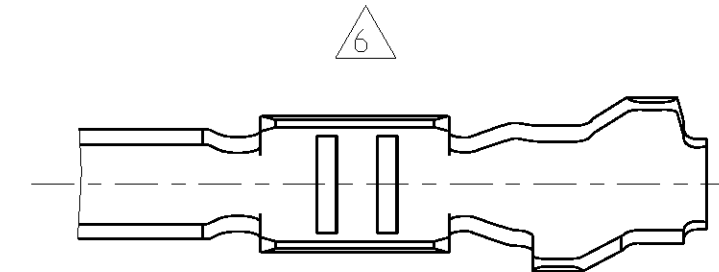

NOTES
Bemerkungen

- 1 DATE CODE (WEEK/YEAR E.G. WEEK NUMBER 18/ YEAR 2011
AND TE REVISION (E.G. REV.A)
Datumscode (Woche/Jahr z.B. KW 18/ Jahr 2011)
und TE Revision (z.B.Rev. A)
- 2 SUITABLE FOR PIN CONTACT SEE DRAWING: TE: 929453
Passend zu Stiftkontakt siehe Zeichnung: TE: 929453
- 3 FOR FLR-CONDUCTOR ACCORDING TO DIN 72551-6 ONLY
Nur fuer FLR-Leitung nach DIN 72551, Teil 6
- 4 DETAILS OF DESIGN ARE LEFT TO MANUFACTURER
Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen



 SELECTIVE GOLD PLATED
Selektiv vergoldet

6 NOT FOR NEW APPLICATION
nicht fuer Neuanwendung

5-1452013-1	A	1452013-1	C	0.5-0.75	Au	A= 2.8 B= 3.8 C= 5.6 D= 15.6	E= 2 G= 2.1 D _{Dr} = 1	H= 2.7 K= 2.9 L= 0.7 D _{Iso} = 1.6	0.13
5-968893-1	A	968893-1	D	0.2-0.35	Au	A= 2.5 B= 3.6 C= 5.6 D= 15.6	E= 1.8 G= 1.8 D _{Dr} = 0.8	H= 2.3 K= 2.3 L= 0.6 D _{Iso} = 1.4	0.13
ODER NO. DESIGN BESTELL-NR. Ausführung 2	REV.	ODER NO. DESIGN BESTELL-NR. Ausführung 6 1	REV.	DGB WIRE-SIZE-RANGE mm ²	SURFACE CONTACT AREA OBERFLÄCHE Kontaktzone	LENGTH Länge	WIRE CRIMP Drahtcrimp	INSU. CRIMP Iso' crimp	WEIGHT Gewicht g
DIMENSIONS/ Abmessungen mm									

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. Garcia	15AUG2000	 TE Connectivity	
		CHK R. Jetter	15AUG2000		
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: ± 0.2 $\pm 0^\circ$		NAME Micro Quadlok System SOCKET CONTACT WITH SHORT CIRCUIT AREA Buchsenkontakt mit Kurzschlussfederbereich	
		PRODUCT SPEC 108-18030			
MATERIAL -		APPLICATION SPEC 114-18021		SIZE A2	CAGE CODE 00779
FINISH -		WEIGHT -		DRAWING NO C=1355983	RESTRICTED TO -
CUSTOMER DRAWING				SCALE	10:1
				SHEET	1 OF 1
				REV	03

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1452013-1](#)