
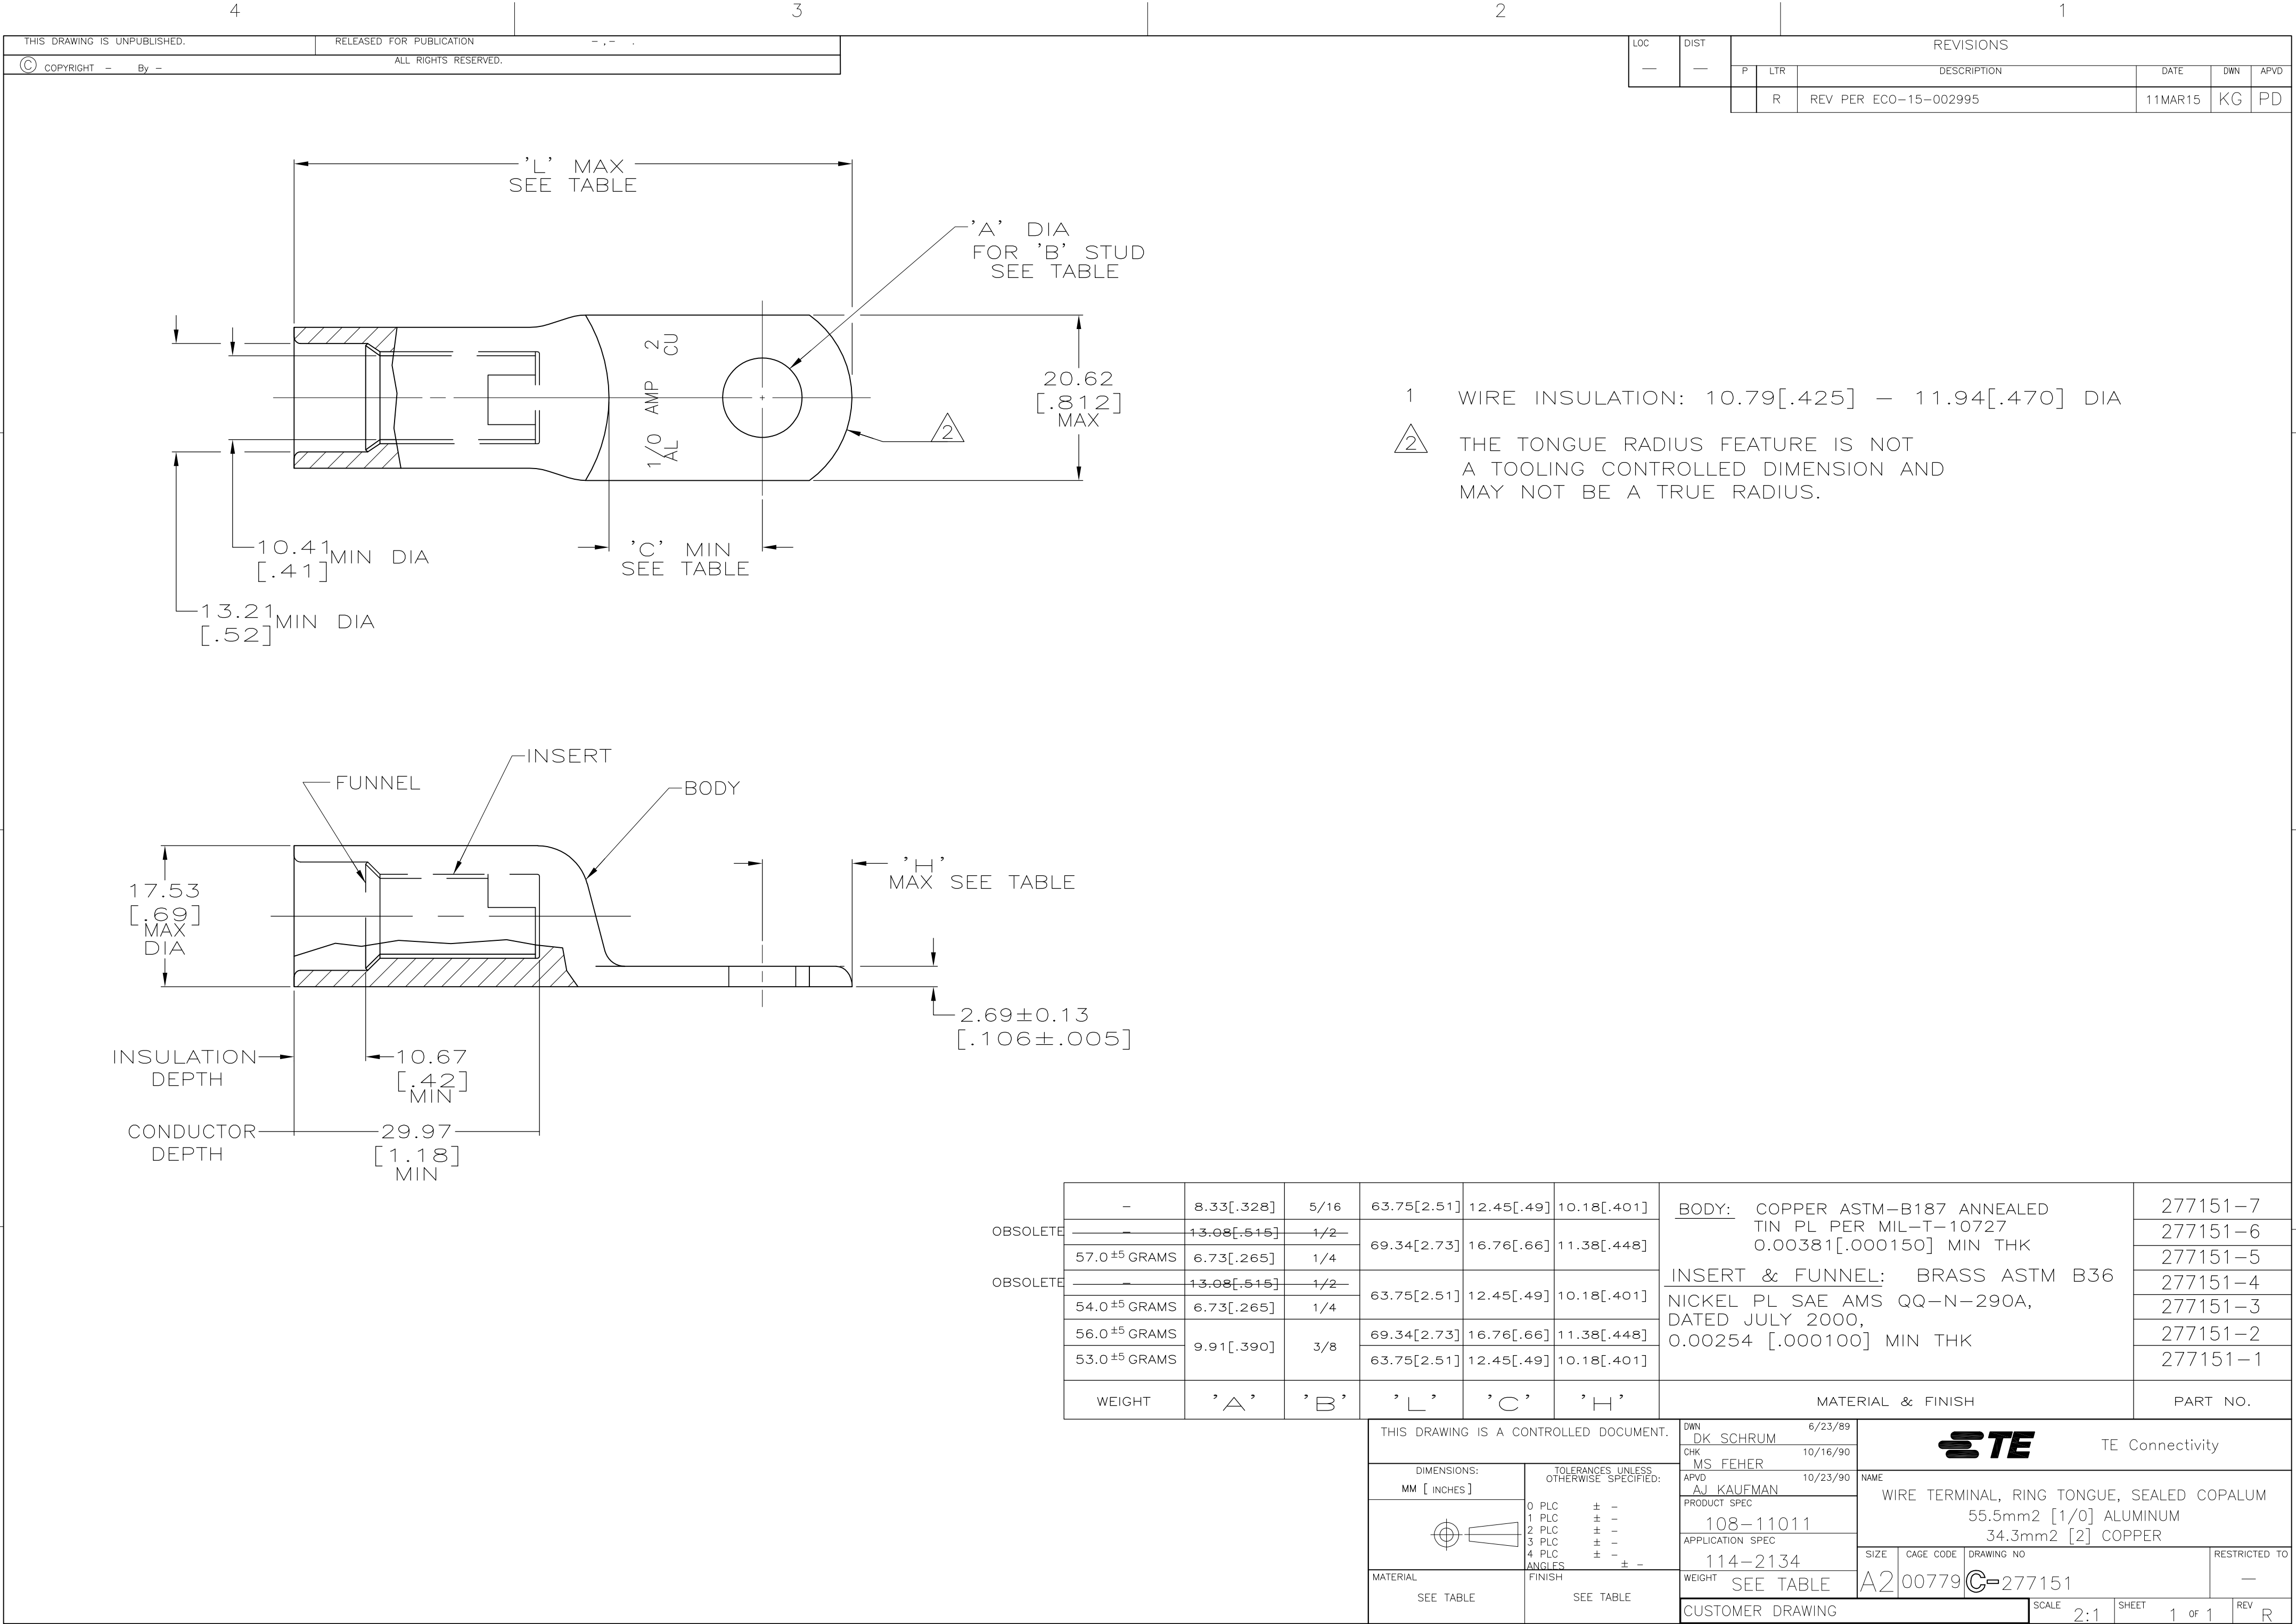




1 WIRE INSULATION: 10.79[.425] — 11.94[.470] DIA
△ THE TONGUE RADIUS FEATURE IS NOT A TOOLING CONTROLLED DIMENSION AND MAY NOT BE A TRUE RADIUS.

OBSOLETE	—	8.33[.328]	5/16	63.75[2.51]	12.45[.49]	10.18[.401]	BODY: COPPER ASTM-B187 ANNEALED TIN PL PER MIL-T-10727 0.00381[.000150] MIN THK	277151-7
	—	13.08[.515]	1/2	69.34[2.73]	16.76[.66]	11.38[.448]		277151-6
	57.0 ±5 GRAMS	6.73[.265]	1/4					277151-5
OBSOLETE	—	13.08[.515]	1/2	63.75[2.51]	12.45[.49]	10.18[.401]	INSERT & FUNNEL: BRASS ASTM B36 NICKEL PL SAE AMS QQ-N-290A, DATED JULY 2000, 0.00254 [.000100] MIN THK	277151-4
	54.0 ±5 GRAMS	6.73[.265]	1/4					277151-3
	56.0 ±5 GRAMS	9.91[.390]	3/8	69.34[2.73]	16.76[.66]	11.38[.448]		277151-2
53.0 ±5 GRAMS	63.75[2.51]			12.45[.49]	10.18[.401]	277151-1		
WEIGHT		’A’	’B’	’L’	’C’	’H’	MATERIAL & FINISH	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DK SCHRUM 6/23/89		 TE Connectivity							
		CHK MS FEHER 10/16/90									
DIMENSIONS: MM [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD AJ KAUFMAN 10/23/90		NAME					
		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC		WIRE TERMINAL, RING TONGUE, SEALED COPALUM 55.5mm2 [1/0] ALUMINUM 34.3mm2 [2] COPPER					
				108-11011							
				APPLICATION SPEC							
MATERIAL		FINISH		114-2134		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
SEE TABLE		SEE TABLE		WEIGHT SEE TABLE		A2	00779	C=277151	—		
CUSTOMER DRAWING						SCALE	2:1	SHEET	1 OF 1	REV	R

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[277151-3](#)