
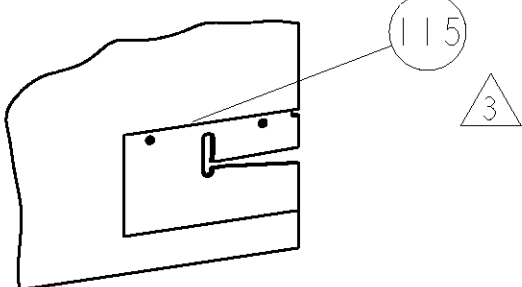
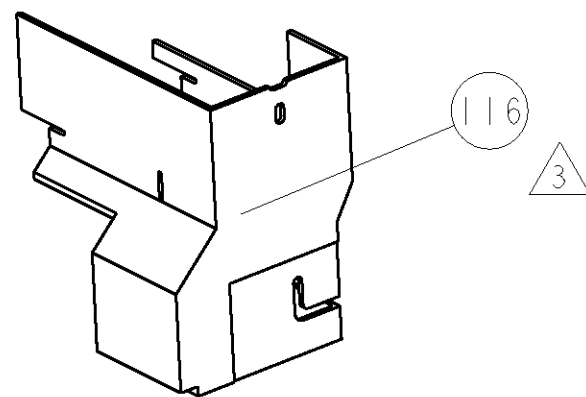
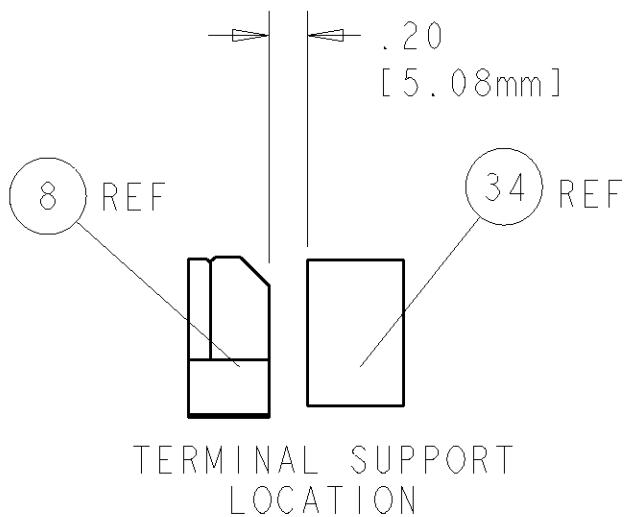
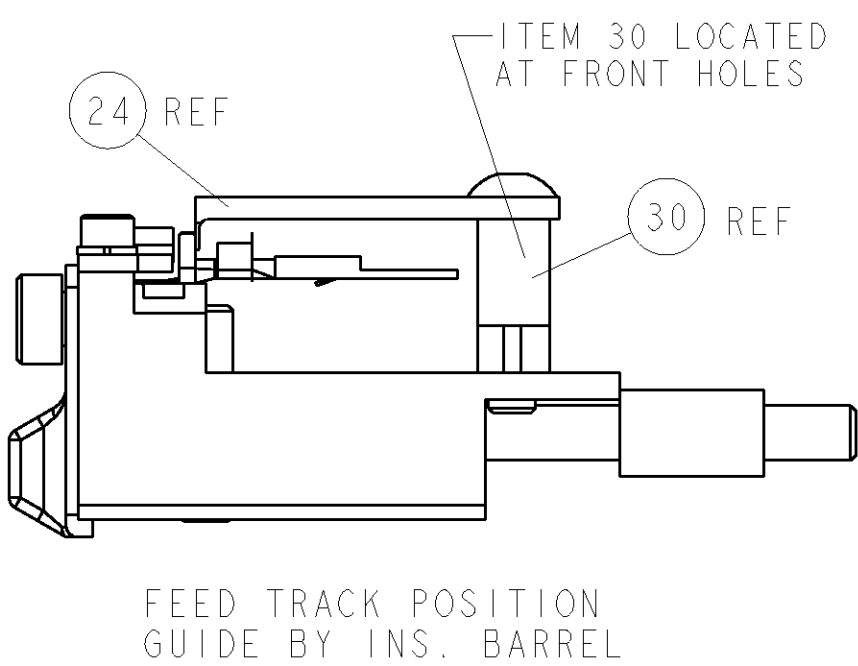



8				7			
THIS DRAWING IS UNPUBLISHED.				RELEASED FOR PUBLICATION			
COPYRIGHT 20				20			
BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.							
PART NUMBER		REV	FIRST USED	POWER UNIT	FEED TYPE	DESCRIPTION	
1852830-1		A	122500-1	LEADMAKER	POST FEED	CUTS CARRIER	
1852830-2		A	565435-5	BENCH MODEL K	PRE FEED	CUTS CARRIER	
1852830-3		A	354500-1	BENCH MODEL G	PRE FEED	CUTS CARRIER	
1852830-6		A	122500-1	LEADMAKER	POST FEED	CONTINUOUS CARRIER	
7-1852830-7		A	-	-	-	SPARE PARTS	

- △ RECOMMENDED SPARE PARTS
△ GREASE LIGHTLY
△ GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE

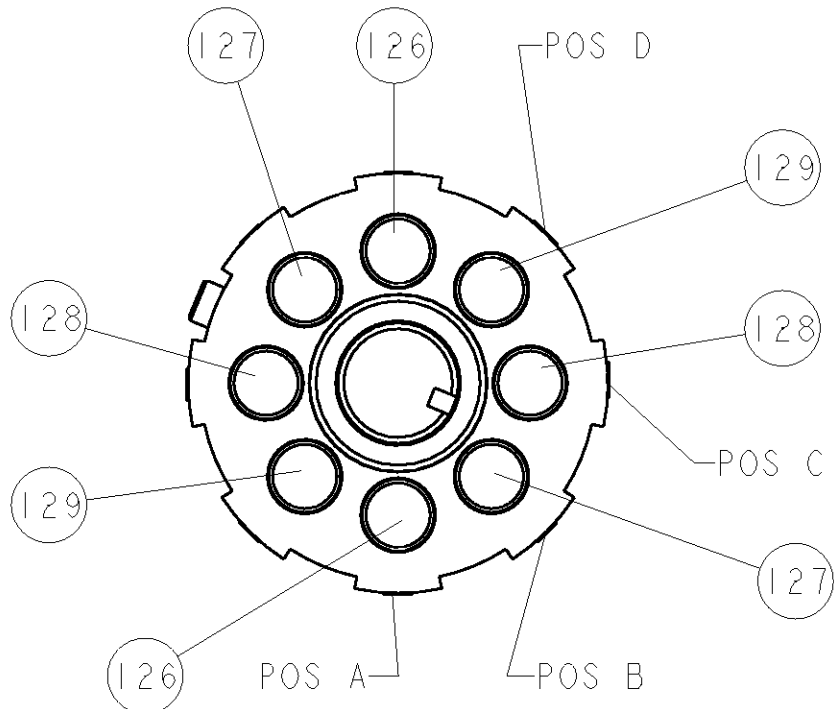

AMP-O-LECTRIC TERM GUARD




G TERMINATOR GUARD

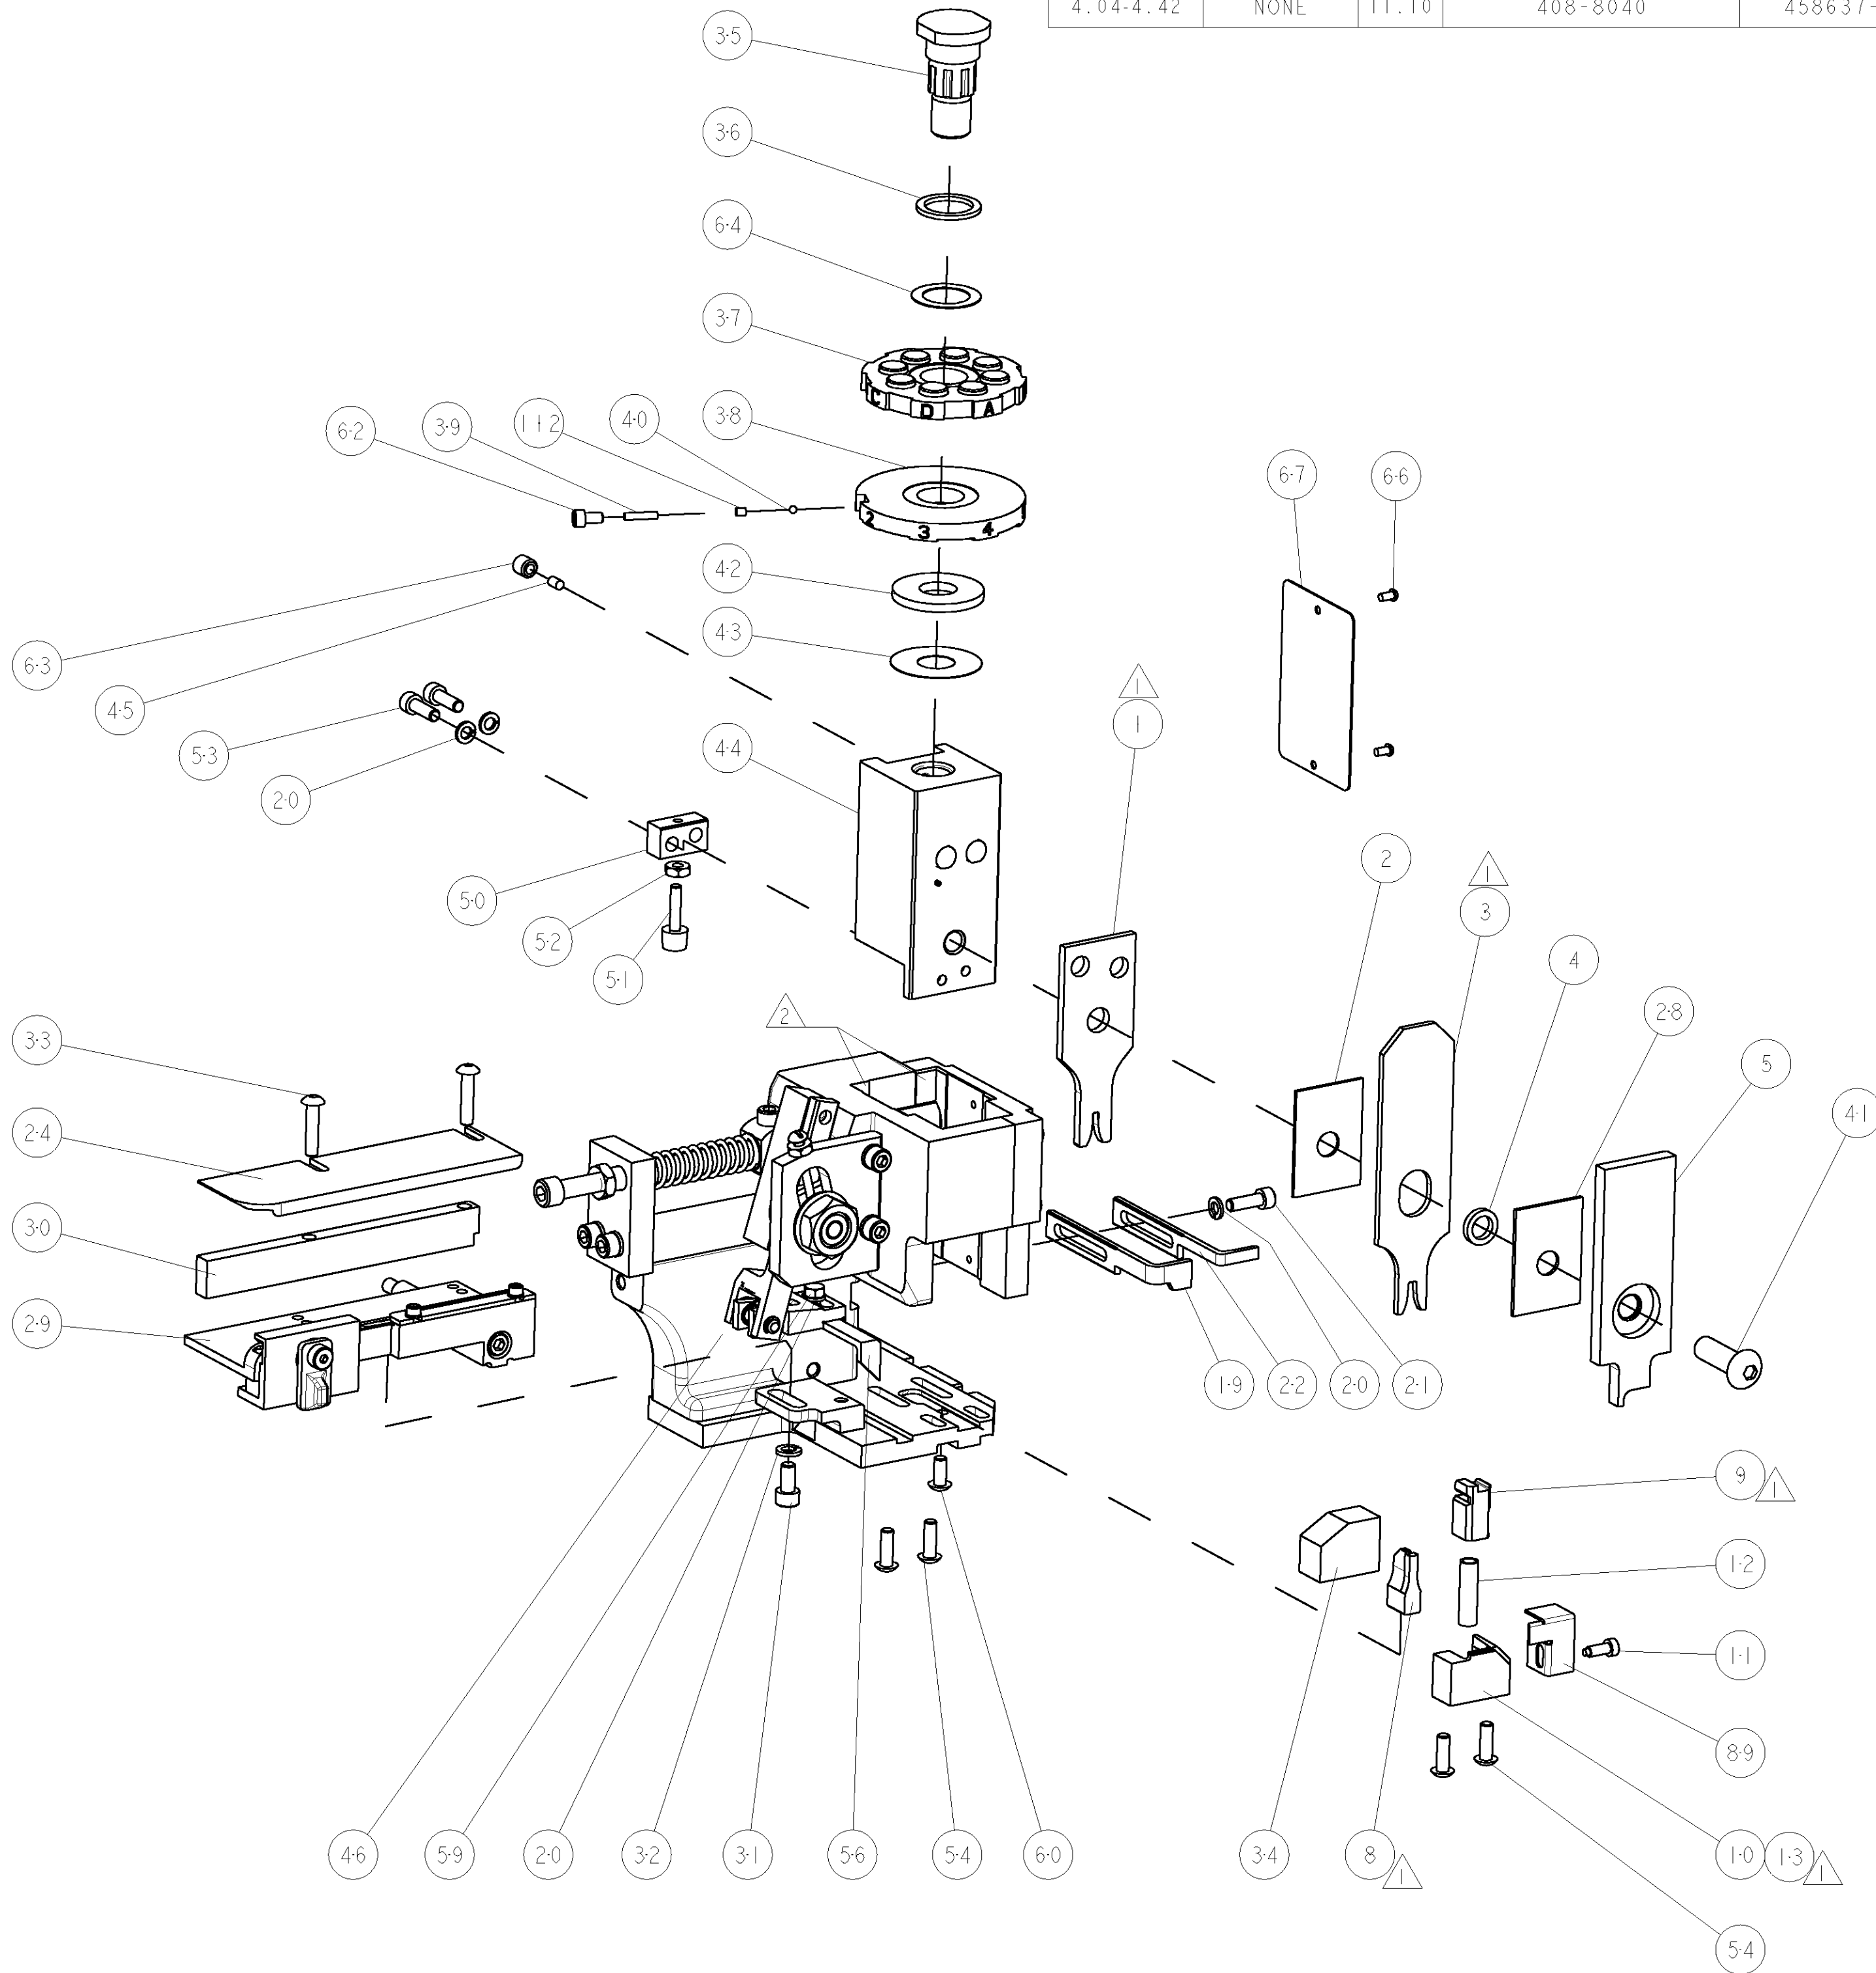

POST-FEED 1 5/8 STROKE

PRE-FEED 1 1/8 STROKE

PRE-FEED 1 5/8 STROKE

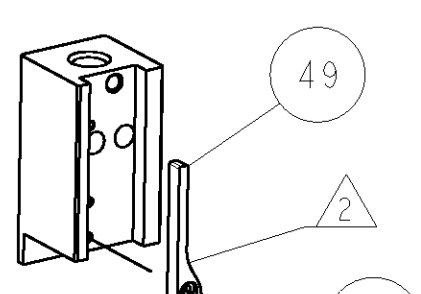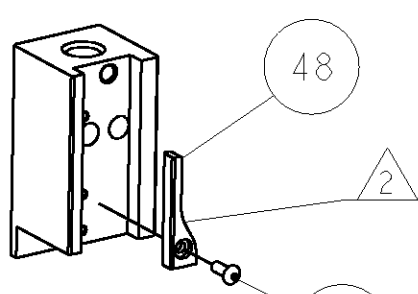

TERMINAL NAME: RFW-M TERMINAL

TE PN	Furukawa	Furukawa TERMINAL - TE CRIMP SPECS			
1949941	X010313				
-	-	PAD LTR	CRIMP HEIGHT	WIRE SIZE	
-	-	A	1.47mm+.05/- .05[.058+.002/- .002]	1.25mm ²	
-	-	B	1.37mm+.05/- .05[.054+.002/- .002]	1mm ²	
-	-	C	1.30mm+.05/- .05[.051+.002/- .002]	0.8mm ²	
-	-	D	1.17mm+.05/- .05[.046+.002/- .002]	0.5mm ²	
-	-	CRIMP	SIZE	TYPE	RANGE
-	-	-	2.03mm [.080]	F	0.50-1.25mm ²
-	-	WIRE	3.30mm [.130]	F	Ø 2.692 MAX
-	-	INSUL	FEED	APPLICATOR INSTRUCTIONS	SET UP GAGE
WIRE STRIP LENGTH	TERM-APPL SPEC	FEED	408-8040	458637-1	
4.04-4.42	NONE	11.10			

LOC	DIST	REVISIONS			
A	66	P. LTR	DESCRIPTION	DATE	DWN
		A	RELEASED	03APR2009	RK
					TE

-	2	2	2	2	-	3-354779-2	PIN, WIRE DISC, .3150	129
-	2	2	2	2	-	2-354779-2	PIN, WIRE DISC, .3100	128
-	2	2	2	2	-	1-354779-6	PIN, WIRE DISC, .3070	127
-	2	2	2	2	-	354779-7	PIN, WIRE DISC, .3025	126
△	-	-	REF	-	..	455749-1	GUARD WINDOW	116
△	-	-	REF	-	..	679532-1	INSERT, GUARD	115
-	1	1	1	1	-	690603-1	SPRING ASSIST AMP-O-MATOR APPLICATOR	112
-	1	1	1	1	-	1-21002-7	SCR, BTN SKT HD CAP 6-32 X .375	91
-	1	1	1	1	-	318563-1	GUARD, FRONT CHIP	89
-	1	1	1	1	-	4088040	SF APPL INST 408-8040	72
-	1	1	1	1	-	217238-1	GENERAL INSTRUCTION PKG	71
-	1	1	1	1	-	461264-1	PLATE, IDENTIFICATION	67
-	2	2	2	2	-	21017-2	SCREW, DRIVE	66
-	1	1	1	1	-	986950-1	WASHER, FLAT PRECISION	64
-	1	1	1	1	-	21009-2	SCR, SET, SELF LOCKING 1/4-20 X .250	63
-	1	1	1	1	-	23030-1	SCR, SKT HD CAP 6-32 x .25	62
-	1	1	1	1	-	22733-8	SCR, BHSC, SELF-LOCKING, 8-32 X .375	60
-	1	1	1	1	-	2-22603-0	SCR, HEX HD CAP 8-32 X .312	59
-	1	1	1	1	-	458537-2	PAWL, FEED	56
-	4	4	4	4	-	2-21002-2	SCR, BTN SKT HD CAP 8-32 X .500	54
-	2	2	2	2	-	2-21000-7	SCR, SKT HD CAP 8-32 X .500	53
-	1	1	1	1	-	21018-5	NUT, HEX, REG 6-32	52
-	1	1	1	1	-	811242-2	BUMPER, HOLD DOWN	51
-	1	1	1	1	-	690753-1	SPACER, TONKER	50
-	-	-	-	-	..	690602-6	CAM, PRE FEED, 1 5/8	49
-	-	-	-	-	..	690602-5	CAM, PRE FEED, 1 1/8	48
-	1	-	-	1	-	690501-4	CAM, POST-FEED 1 5/8	47
-	1	1	1	1	-	459456-1	APPL. BASIC SUB ASSY (SIDE WISE MOCA)	46
-	1	1	1	1	-	690191-1	PLUG,NYLON	45
-	1	1	1	1	-	455673-1	RAM, SIDE FEED	44
-	1	1	1	1	-	690125-1	SHIM SUB-ASSY	43
-	1	1	1	1	-	690124-1	WASHER, RAM (.115)	42
-	1	1	1	1	-	7-21002-9	SCR, BTN SKT HD CAP 5/16-24 X 1.00	41
-	1	1	1	1	-	23241-6	BALL, STEEL	40
-	1	1	1	1	-	690170-1	SPRING, COMPRESSION	39
-	1	1	1	1	-	690142-1	DISC, INSULATION	38
-	1	1	1	1	-	354777-1	WIRE DISC, ASSEMBLY	37
-	1	1	1	1	-	22480-5	SPRING, COMPRESSION	36
-	1	1	1	1	-	690212-1	POST, RAM	35
-	1	1	1	1	-	690786-3	TERMINAL SUPPORT	34
-	2	2	2	2	-	2-21002-4	SCR, BTN SKT HD CAP 8-32 X .750	33
-	1	1	1	1	-	21024-5	WASHER, SPRG LOCK, REG NO 10	32
-	1	1	1	1	-	3-21000-4	SCR, SKT HD CAP 10-32 X .375	31
-	1	1	1	1	-	1320908-2	SPACER, STRIP GUIDE	30
-	1	1	1	1	-	1633091-1	ASSEMBLY, STRIP GUIDE	29
-	1	1	1	1	-	1-455888-0	SPACER, CRIMPER	28
-	1	1	1	1	-	1320928-1	PLATE, STRIP GUIDE	24
-	1	-	-	1	-	690472-2	STRIPPER	22
-	1	1	1	1	-	2-21000-7	SCR, SKT HD CAP 8-32 X .500	21
-	4	4	4	4	-	21024-4	WASHER, SPRG LOCK, REG NO 8	20
-	-	-	-	-	-	691353-1	STRIPPER	19
△	-	-	-	-	-	679625-1	SHEAR HOLDER, FRONT (NO CUT)	13
△	-	1	1	1	-	3-22280-3	SPRING, COMPRESSION	12
△	-	1	1	1	-	690461-1	STOP, SHEAR	11
△	-	-	1	1	-	690459-1	SHEAR HOLDER, FRONT	10
△	-	1	1	1	-	454276-1	FLOATING SHEAR, FRONT	9
△	1	1	1	1	-	8-662186-9	ANVIL, COMBINATION	8
-	-	-	-	-	..	-	-	7
-	-	-	-	-	..	-	-	6
-	1	1	1	1	-	1-455889-4	DEPRESSOR, SHEAR	5
-	1	1	1	1	-	1-238011-0	BLOCK, CRIMPER SPACER	4
△	1	1	1	1	-	4-456134-4	CRIMPER, INSULATION F PREMIUM	3
△	-	1	1	1	-	455888-8	SPACER, CRIMPER	2
△	1	1	1	1	-	1-456405-5	CRIMPER, WIRE PREMIUM	1

THIS IS A CUSTOMER DRAWING. IT IS THE PROPERTY OF TYCO ELECTRONICS CORPORATION. IT IS TO BE USED FOR THE CUSTOMER'S USE ONLY. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, WITHOUT THE WRITTEN PERMISSION OF TYCO ELECTRONICS CORPORATION.		DWN	ZHANG	24MAR2009	Tyco Electronics Tyco Electronics Harrisburg, PA 17105-3608		
DIMENSIONS: INCHES		CHK	L. GROSS	24MAR2009	NAME SIDE FEED HDM APPLICATOR		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	N. DEMING	24MAR2009	PRODUCT SPEC - APPLICATION SPEC - SIZE CAGE CODE DRAWING NO RESTRICTED TO		
9 PLC ±.01		APPLICATION SPEC		SIZE			
1 PLC ±.01		WEIGHT		CAGE CODE			
3 PLC ±.001		CUSTOMER DRAWING		DRAWING NO			
4 PLC ±.0001		SCALE		1 OF 1			
FINISH		REV		A			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1852830-6](#)