
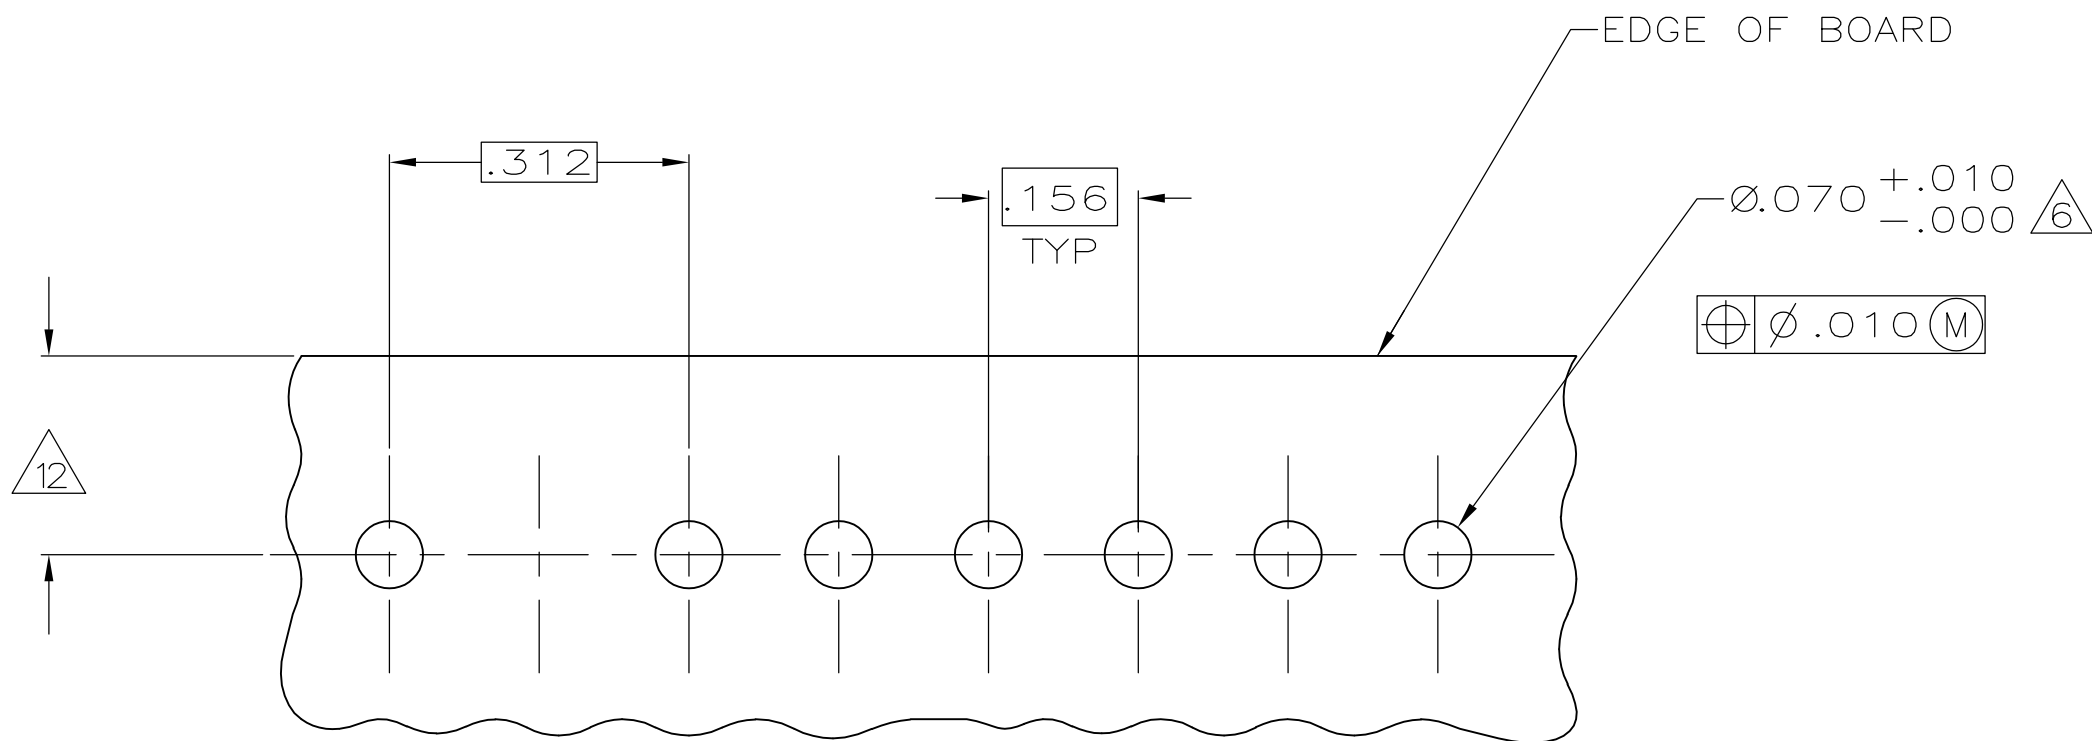
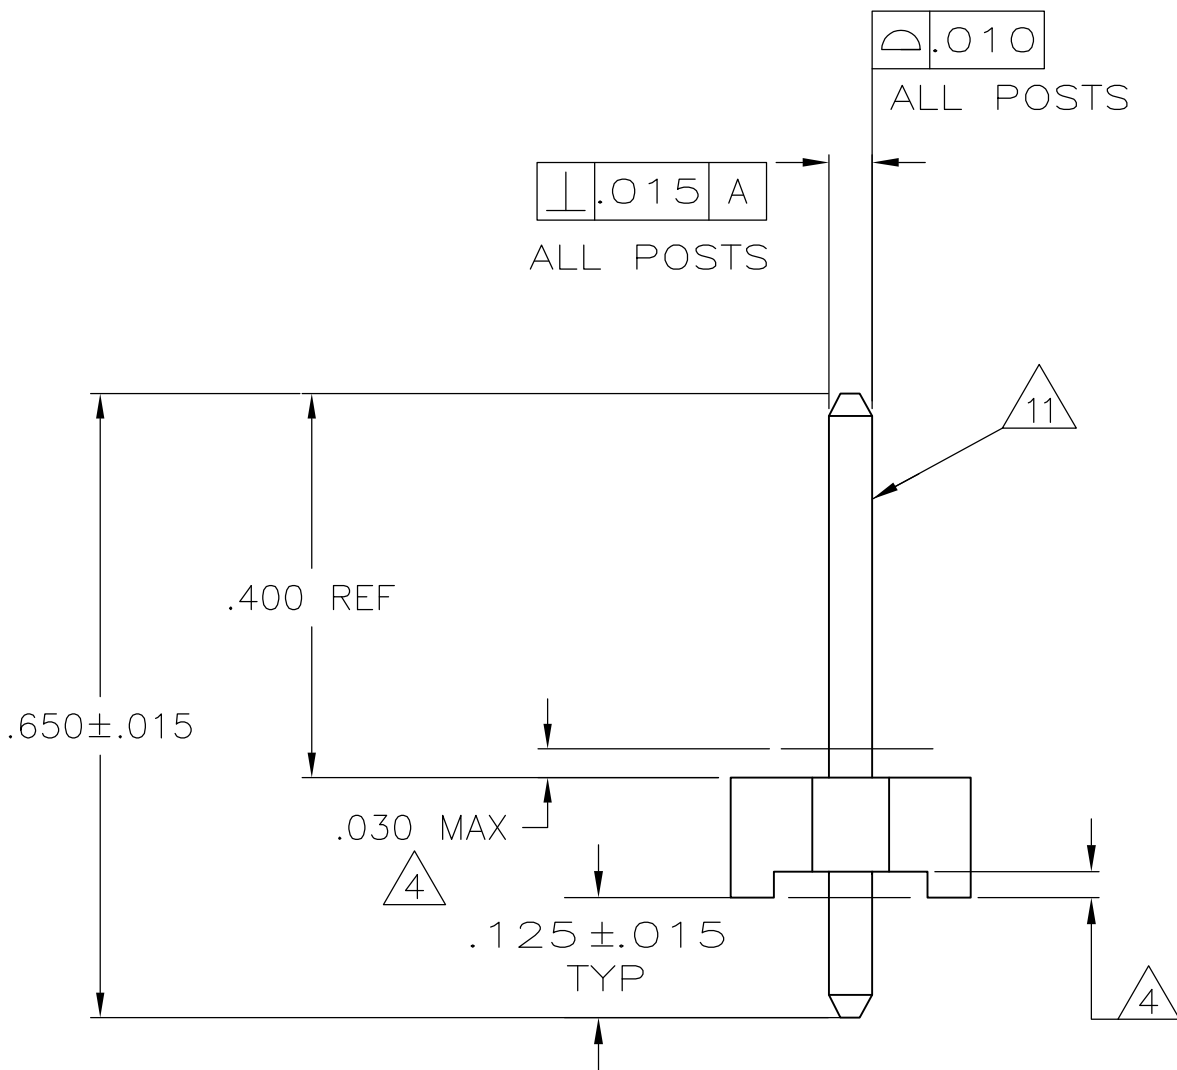
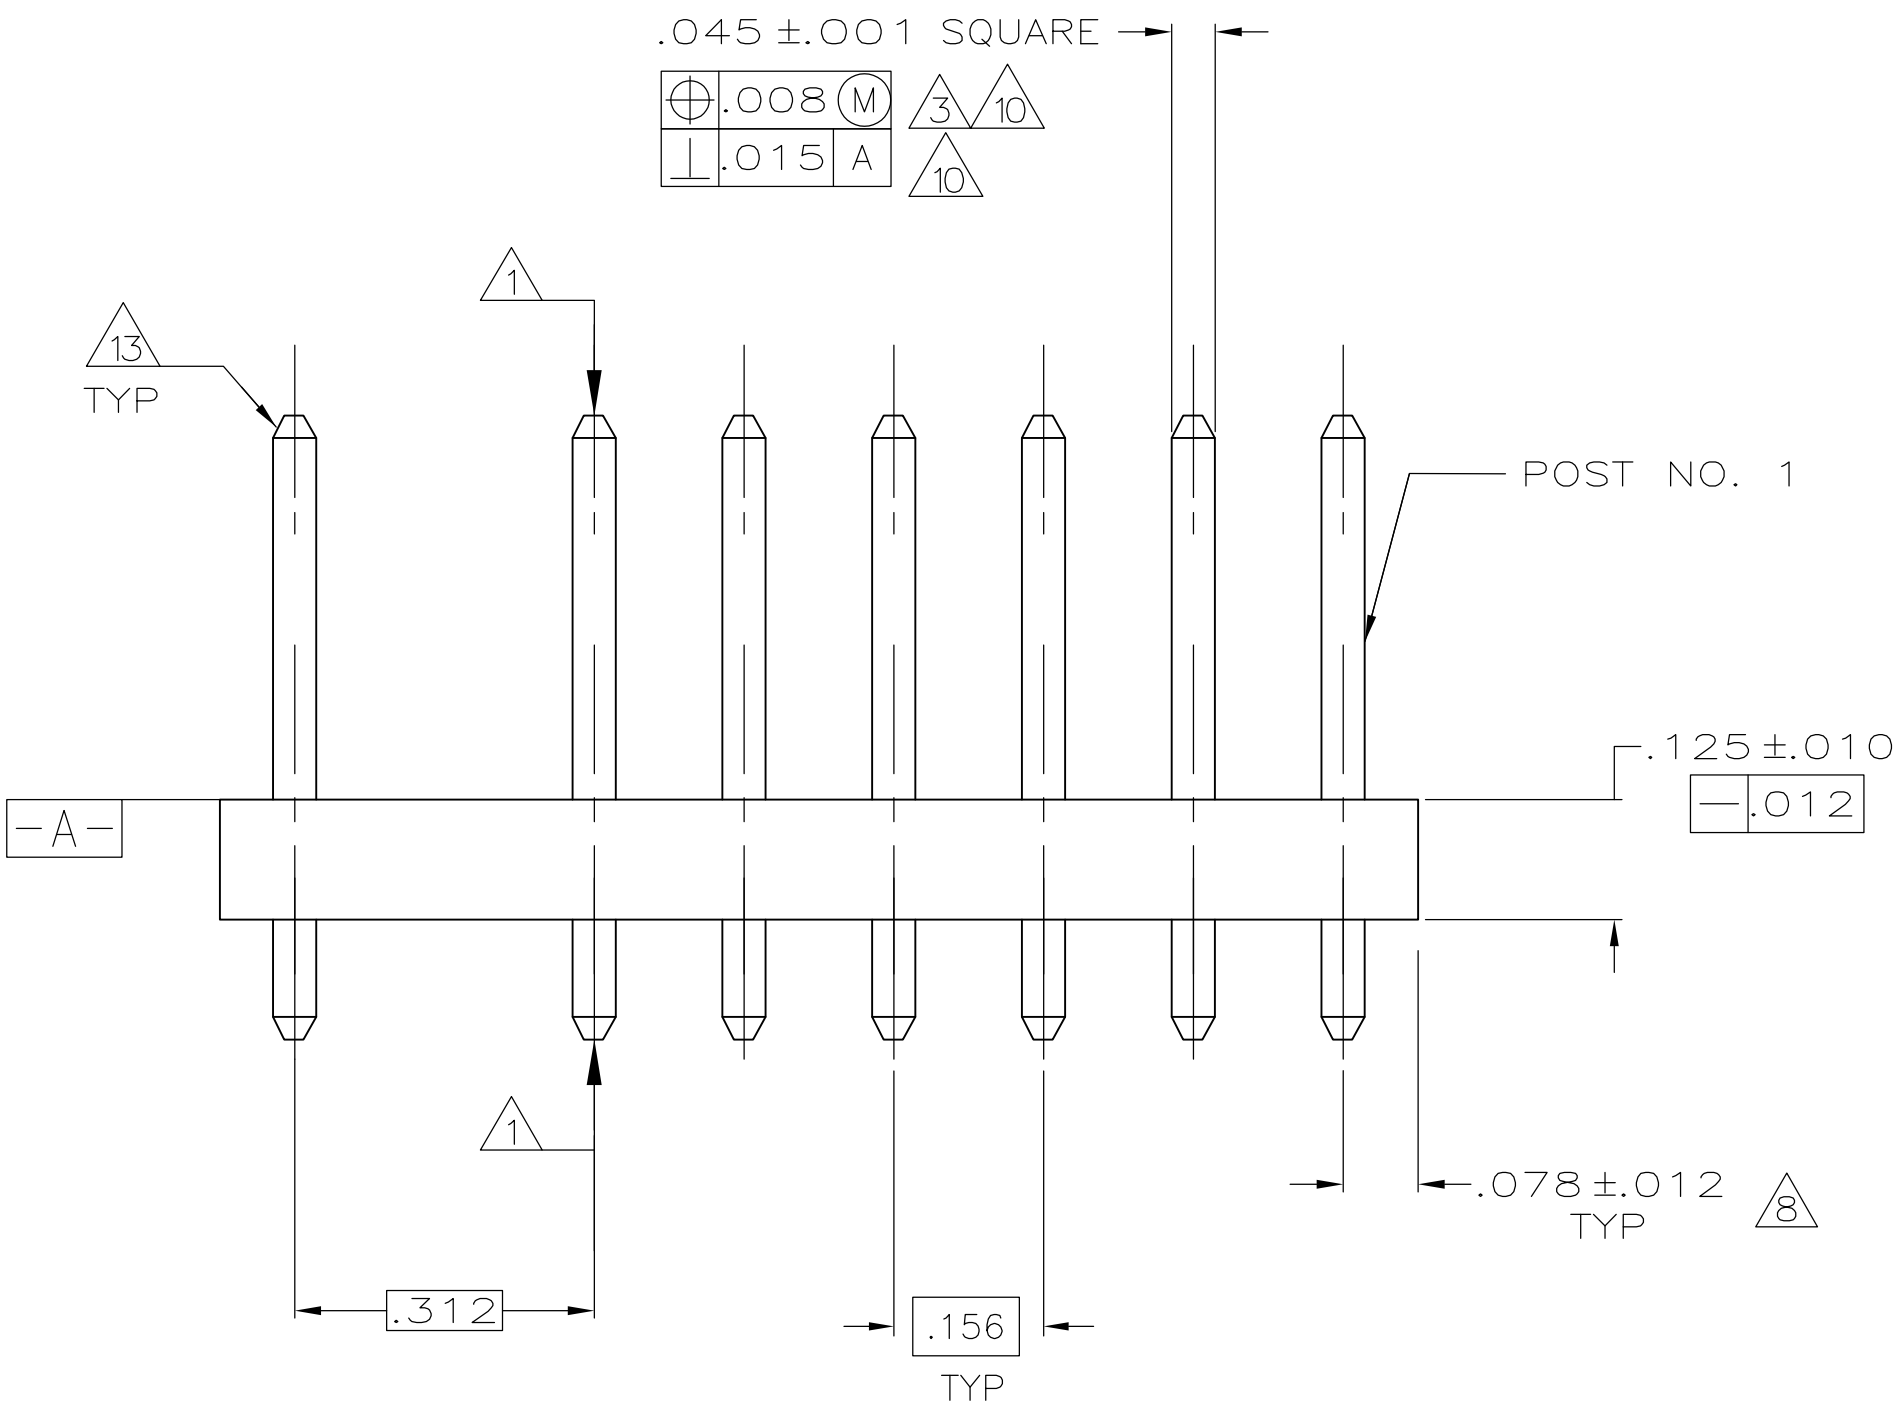


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	0		E	REVISED PER ECO-12-016930	05OCT12	KH	SM

- 1
- POST TO WITHSTAND 13 NEWTONS (3LBS.) MIN. AXIAL FORCE IN BOTH DIRECTIONS SHOWN WITHOUT DISLODGING.
- 2
- TOLERANCES APPLY TO SOLDER SIDE OF BOARD.
- 3
- MEASURED AT SURFACE 

-A-
- 4
- PLASTIC FLASH PERMITTED IN THIS AREA.
- 5
- PARTS COMPLY WITH AMP SOLDERABILITY SPEC. NO. 109-11-2.
- 6
- ONE HOLE MAY BE UNDERSIZED (.065/.060 DIA.) FOR ASSEMBLY RETENTION DURING WAVE SOLDERING.
- 7
- MATERIAL: HEADER-THERMOPLASTIC POLYESTER  
GLASS-FILLED 94V-0(NATURAL)  
POST-COPPER ALLOY (TIN PLATED)
- 8
- COORDINATE DIMENSION APPLIES FROM CENTER OF ACTUAL FEATURE.
- 9
- PLASTIC BURRS CAUSED BY CUT-OFF TOOLING ARE PERMITTED WITHIN THE MAXIMUM TOLERANCE ENVELOPE.
- 10
- POST TO BE MEASURED WHEN STRIP IS HELD FLAT.
- 11
- POST MUST WITHSTAND TWO 90° BENDS AGAINST EXTRUSION WITHOUT BREAKING.
- 12
- DIMENSION SHOULD BE .140 MIN WHEN MATING WITH A MTA 156 CONNECTOR ASSEMBLY OR A SL-156 CONNECTOR ASSEMBLY.
- 13
- PIN BURR OF .005 MAX. VERTICAL AND .003 MAX. HORIZONTAL PERMITTED AT POST TIPS ON BOTH ENDS.

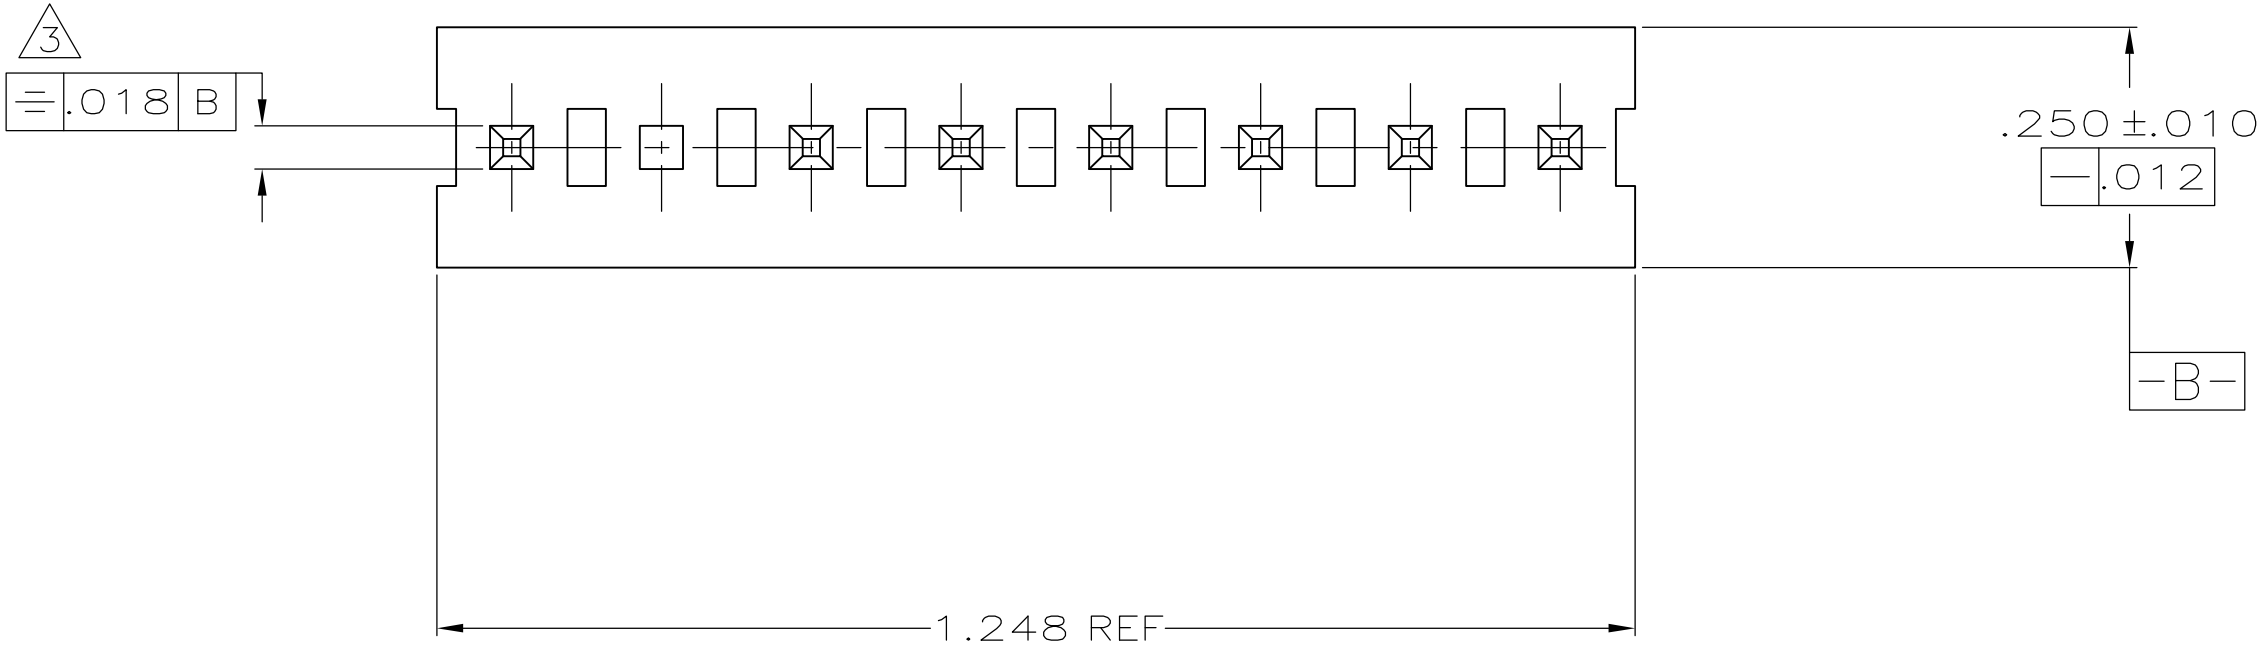

.060	1.52	1.248	31.70
.045	1.14	.700	17.78
.030	0.76	.450	11.43
.018	0.46	.312	7.92
.015	0.38	.250	6.35
.012	0.30	.156	3.96
.010	0.25	.140	3.56
.008	0.20	.125	3.18
.005	0.13	.078	1.98
.003	0.08	.070	1.78
.001	0.03	.065	1.65
.000	0.00	.063	1.60
IN	MM	IN	MM

CONVERSION TABLE

RECOMMENDED MOUNTING HOLE PATTERN FOR .063 THICK P.C. BOARD

644968-1 SHOWN

OBSOLETE

POST NUMBER OMITTED

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER CHK D. BOSSI APVD D. BOSSI	18APR2006 18APR2006 18APR2006	TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
0 PLC ± -		1 PLC ± -		MTA-156 HEADER ASSEMBLY, PLAIN,	
2 PLC ± -		3 PLC ± -		STRAIGHT, .045, SQUARE POST,	
4 PLC ± -		5 PLC ± -		8 POSITION, OMITTED POST, TIN PLATED	
MATERIAL		FINISH		SIZE	
7		7		A1	
WEIGHT		CUSTOMER DRAWING		RESTRICTED TO	
5:1		SHEET 1 OF 1		REV E	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[644968-4](#)