


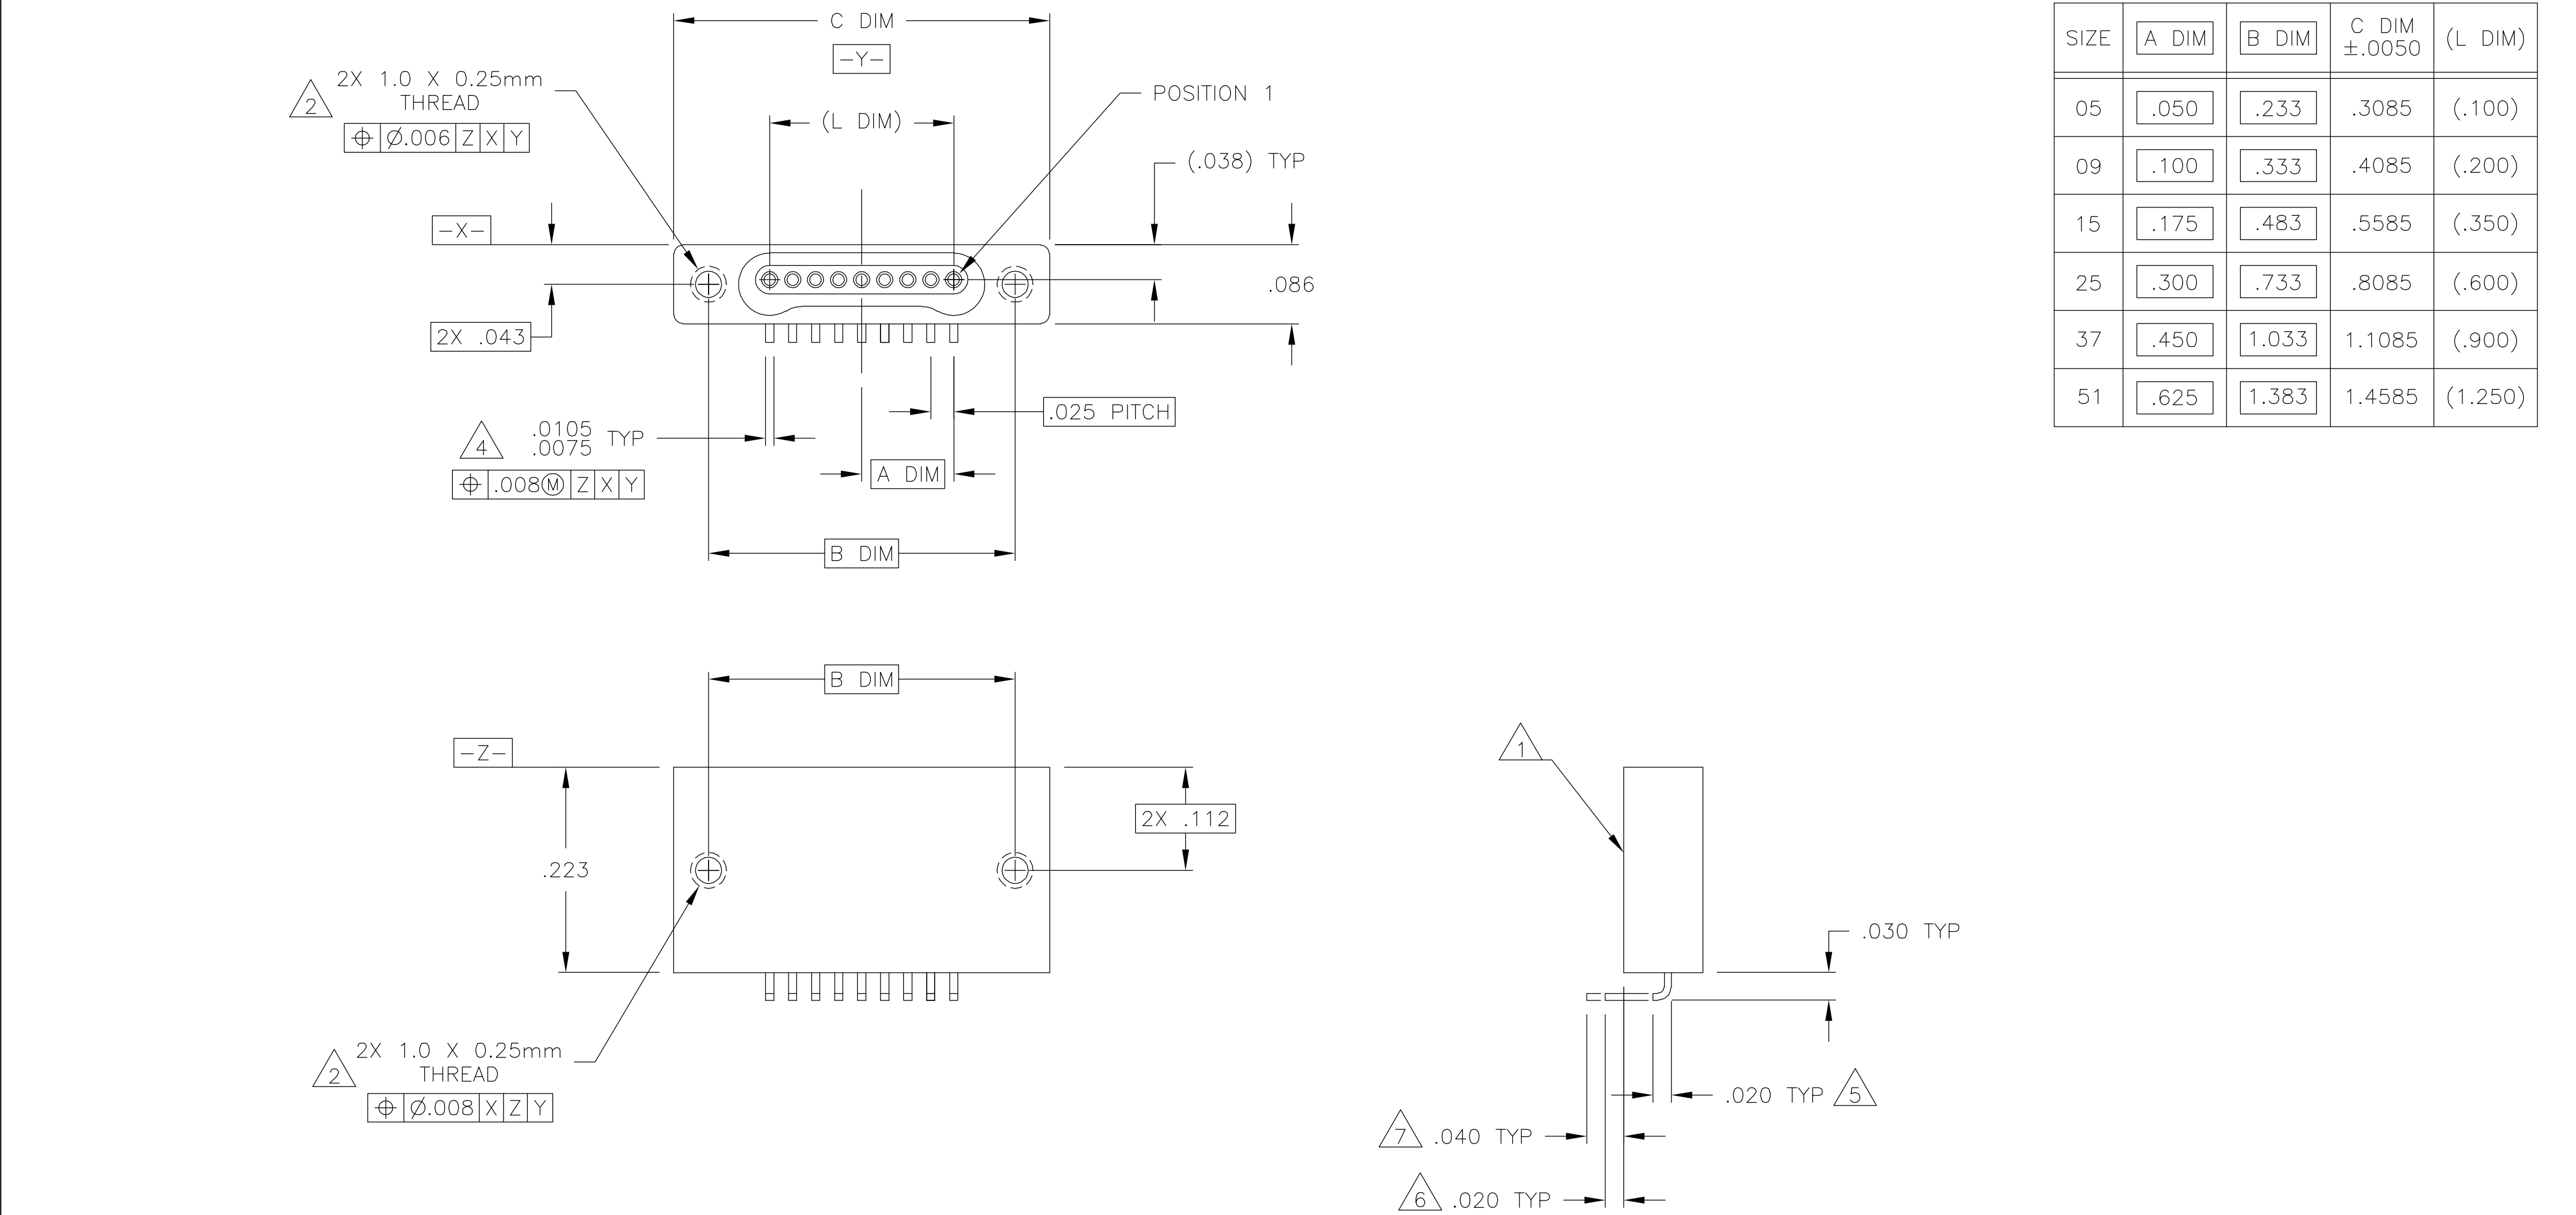

SIZE	A DIM	B DIM	C DIM ±.0050	(L DIM)
05	.050	.233	.3085	(.100)
09	.100	.333	.4085	(.200)
15	.175	.483	.5585	(.350)
25	.300	.733	.8085	(.600)
37	.450	1.033	1.1085	(.900)
51	.625	1.383	1.4585	(1.250)

1

SHELL OPTIONS (TO BE SPECIFIED IN NANONICS PART NUMBER):
METAL: 6061-T6 ALUMINUM, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 (STANDARD) OR GOLD PLATED PER ASTM B488
303 STAINLESS STEEL, PASSIVATED PER SAE-AMS-2700
INSULATOR MATERIAL FOR ALL METAL SHELLS IS LIQUID CRYSTAL POLYMER (LCP) PER MIL-M-24519 OR PER ASTM D5138
PLASTIC: LIQUID CRYSTAL POLYMER (LCP) PER MIL-M-24519 OR PER ASTM D5138

2

STANDARD 1.0 X 0.25mm MOUNTING AND JACKSCREW THREADS ARE SHOWN FOR REFERENCE ONLY AND MUST BE SPECIFIED IN THE NANONICS PART NUMBER WHEN REQUIRED. 1.2 X 0.25mm THREADS ALSO AVAILABLE.

3

MOUNTING HARDWARE IS AVAILABLE WITH THIS CONFIGURATION (NOT SHOWN). HARDWARE MUST BE SPECIFIED IN THE NANONICS PART NUMBER. CONSULT TYCO ELECTRONICS FOR DETAILS.

4

LEAD MATERIAL: BeCu, TIN LEAD PLATED PER 60/40 COMPOSITION PER SAE-AMS-P-81728

5

NANONICS TERMINATION CODE: L4

6

NANONICS TERMINATION CODE: L42

7

NANONICS TERMINATION CODE: L44

8

THIS DRAWING PREVIOUSLY IDENTIFIED AS NANONICS N10138/132

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL
SEE NOTES

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± .010

3 PLC ± .005

4 PLC ± -

ANGLES ± 1°

FINISH

SEE NOTES

DWN
D RYAN
04-21-92

CHK
E BURGER
02-28-93

APVD
M STORRY
04-03-01

PRODUCT SPEC

APPLICATION SPEC

WEIGHT
-

CUSTOMER DRAWING

Tyco Electronics Corporation
Harrisburg, PA 17105-3608

NAME
RECEPTACLE ASSEMBLY, VERTICAL SURFACE
MOUNT, SINGLE ROW DUALLOBE,
PLASTIC OR METAL

SIZE
A2

CAGE CODE
0PJN9

DRAWING NO
C=1589463

RESTRICTED TO
-

SCALE
8:1

SHEET
1 of 2



REV
M1

THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
—	—		—	SEE SHEET 1	—	—	—

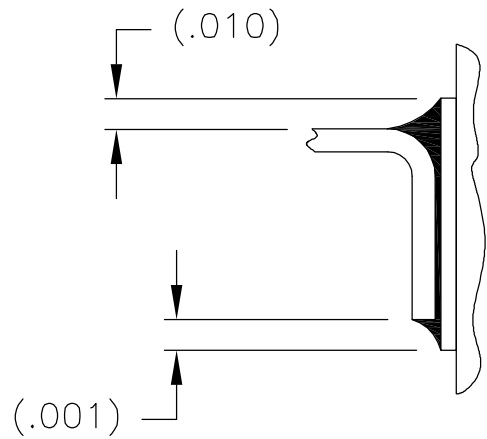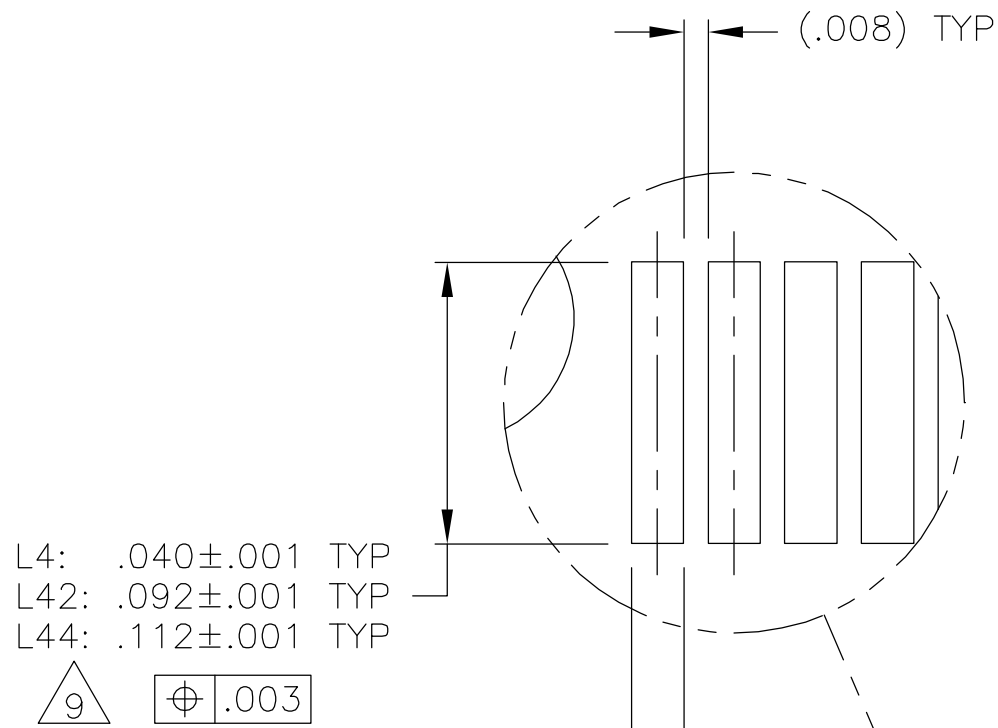


TYPICAL FOOT PLACEMENT
ON SOLDER PAD

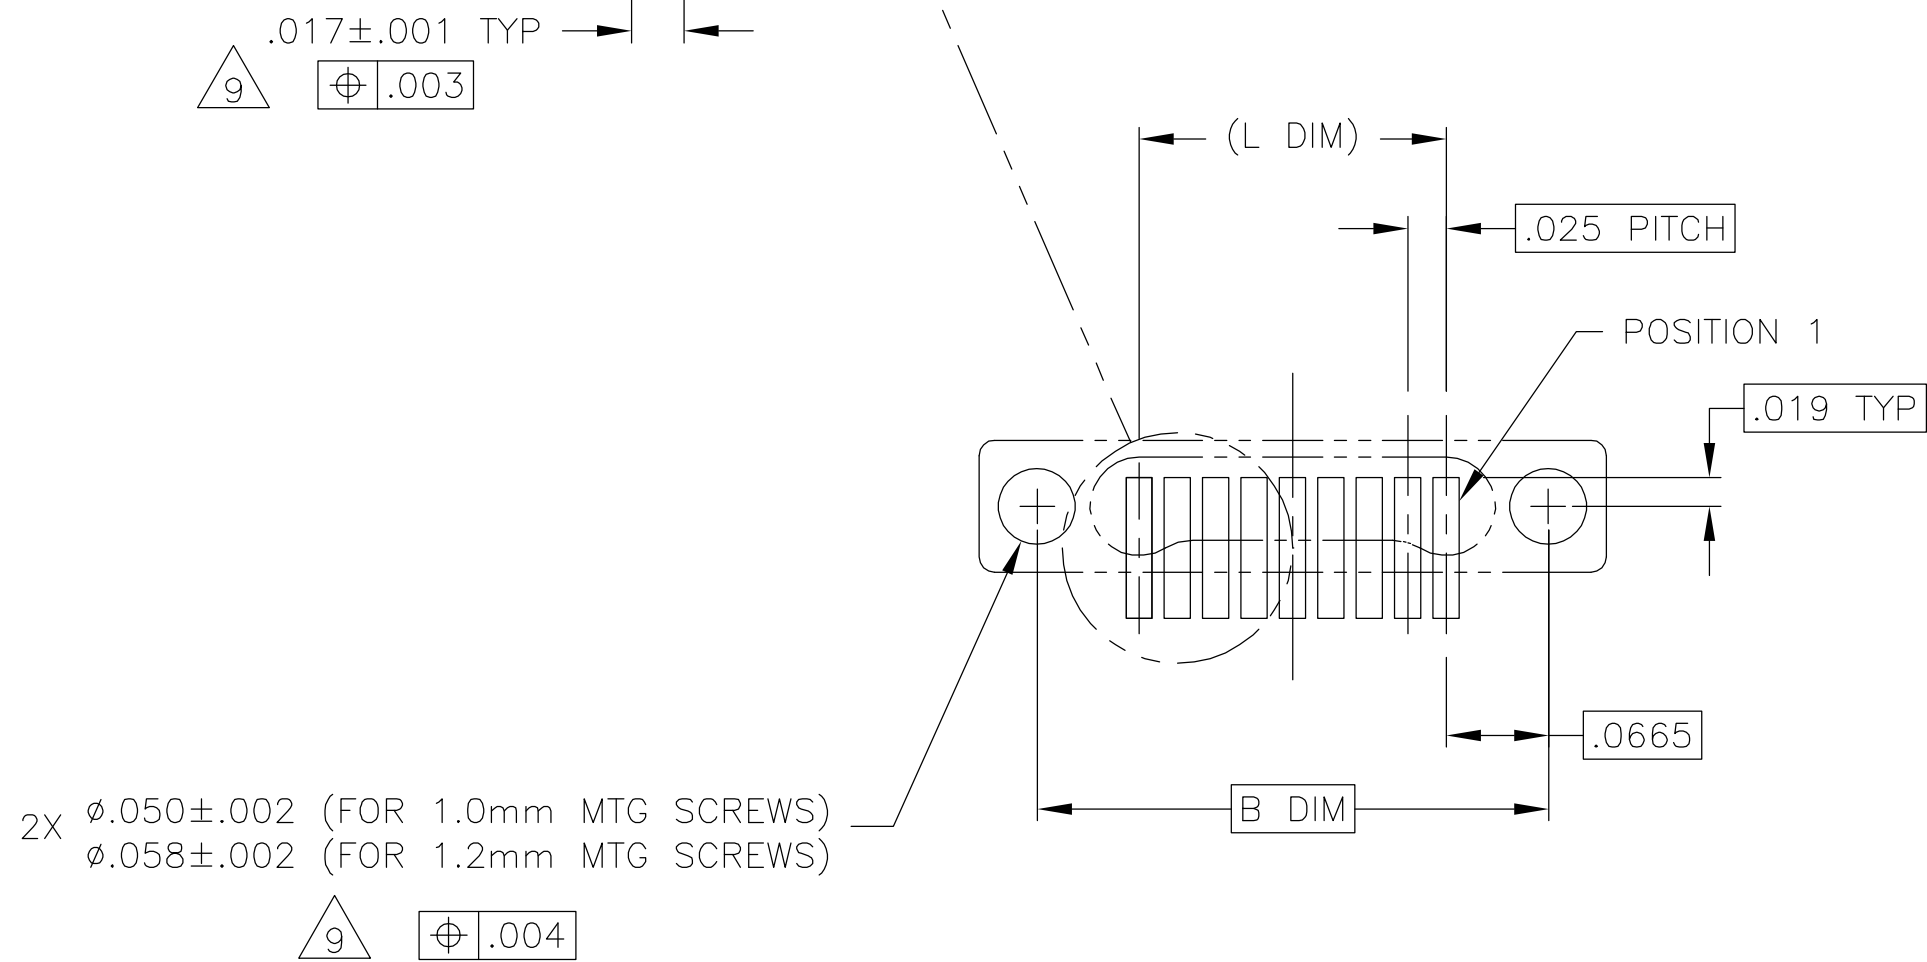

SIZE 09 SHOWN FOR REFERENCE

TYPICAL PCB LAYOUT

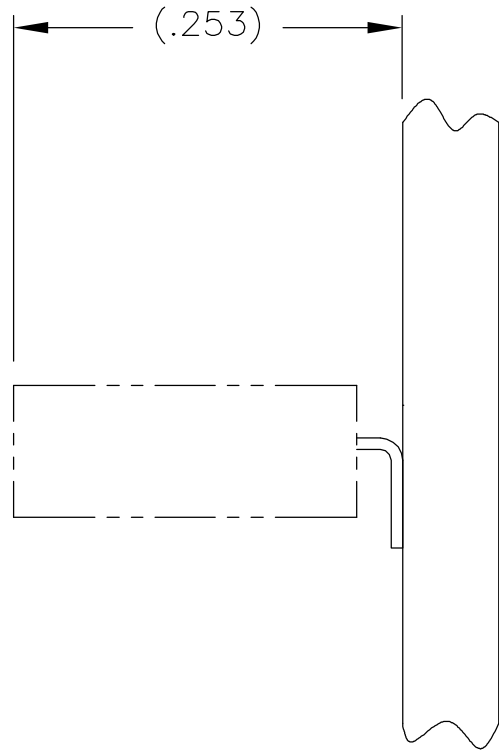

POSITIONAL TOLERANCES FOR BASIC DIMENSIONED FEATURES ARE RELATIVE TO FIDUCIALS OR SOME SIMILAR DATUM REFERENCE DEFINED BY THE PCB DESIGNER.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D RYAN 04-21-92		tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608											
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK E BURGER 02-28-93		NAME									
	0 PLC ± -		APVD M STORRY 04-03-01		RECEPTACLE ASSEMBLY, VERTICAL SURFACE MOUNT, SINGLE ROW DUALLOBE, PLASTIC OR METAL										
	1 PLC ± -		PRODUCT SPEC												
	2 PLC ± .010		—												
	3 PLC ± .005		APPLICATION SPEC												
4 PLC ± -		—		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO					
MATERIAL		FINISH		WEIGHT —		A2		0PJN9		C=1589463		—			
SEE NOTES		SEE NOTES		CUSTOMER DRAWING						SCALE 8:1		SHEET 2 of 2		REV M1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[SSL025L42](#)