




FEATURES

Low ESR - High Ripple Current - Multiple case sizes

APPLICATIONS

Filtering - Bypass - Coupling - Blocking

Operating Temperature Range		-55°C to +105°C											
Capacitance Tolerance		+20% at 120 Hz, 20°C											
Surge voltage	WVDC	6.3	10	16	25	35	50						
	SVDC	7.9	13	20	32	44	63						
Dissipation Factor	WVDC	6.3	10	16	25	35	50						
	Tan δ	.26	.22	.18	.16	.14	.12						
		Add .02 for every 1000uF above 1000uF											
Leakage current		1 Minute											
		.03CV											
Low temperature stability Impedance ratio (120 Hz)	WVDC	6.3	10	16	25	35	50						
	-55°C to +20°C	6	6	4	4	4	3						
Load Life		3000 hours at 105°C with rated WVDC and ripple current applied (2000 hrs for D≤6.3)											
		Capacitance change				≤20% of initial measured value							
		Dissipation factor				≤200% of maximum specified value							
		Leakage current				≤100% of maximum specified value							
Shelf Life		1000 hours at 105°C with no voltage applied											
		Capacitance change				≤20% initial measured value							
		Dissipation factor				≤200% of maximum specified value							
		Leakage current				≤100% of maximum specified value							
Ripple Current Multipliers					Frequency (Hz)				Temperature (°C)				
		Capacitance		50	120	300	1k	10k	100k	+105	+85	+65	+50
		C≤4.7		.3	.43	.7	.54	.83	1.0	1.0	1.73	2.19	2.4
		4.7<C≤33		.38	.51	.62	.76	.87	1.0	1.0	1.73	2.19	2.4
		33<C≤100		.48	.6	.71	.85	.9	1.0	1.0	1.73	2.19	2.4
		100<C≤270		.6	.72	.8	.91	.95	1.0	1.0	1.73	2.19	2.4
		270<C≤1000		.68	.83	.9	.96	1.0	1.0	1.0	1.73	2.19	2.4
C>1000		.82	.91	.98	.98	1.0	1.0	1.0	1.73	2.19	2.4		

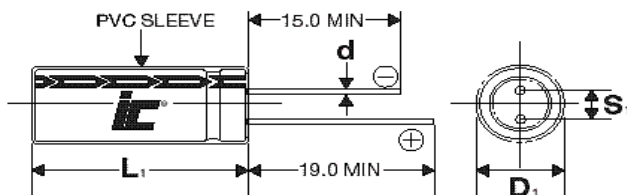

D	5	6.3	8	10	12.5	16	18
S	2.0	2.5	3.5	5.0	5.0	7.5	7.5
d	0.5	0.5	0.6	0.6	0.6	0.8	0.8

L≤16mm, L₁=L+1.5mm Max.

L>16mm, L₁=L+2mm Max.

D₁=D+0.5mm Max.

S₁=S+0.5 mm

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cornell Dubilier:

[476RZM050M](#) [108RZM050M](#) [477RZM016M1013](#) [228RZM010M1320](#) [106RZM050M](#) [227RZM025M](#) [226RZM050M](#)
[227RZM050M](#) [107RZM025M](#) [107RZM050M](#) [337RZM035M](#) [228RZM025M1625](#) [478RZM035M](#) [108RZM025M1320](#)
[228RZM050M](#) [477RZM025M](#) [687RZM035M1320](#) [478RZM025M](#) [337RZM050M1020](#) [108RZM035M1325](#)
[477RZM035M1020](#) [228RZM016M1325](#) [337RZM016M](#) [476RZM025M](#) [337RZM025M1013](#) [338RZM016M1820](#)
[336RZM050M](#) [157RZM050M](#) [477RZM010M](#) [477RZM035M1615](#) [477RZM050M1815](#) [338RZM6R3M1815](#)
[109RZM010M](#) [477RZM016M820](#) [338RZM010M1620](#) [109RZM016M](#) [158RZM035M1340](#) [687RZM016M](#)
[338RZM6R3M1320](#) [228RZM6R3M1030](#) [478RZM016M](#) [158RZM050M1832](#) [109RZM6R3M](#) [155RZM050M](#)
[338RZM016M1625](#) [336RZM035M](#) [338RZM016M1340](#) [478RZM6R3M1820](#) [107RZM010M](#) [158RZM016M1320](#)
[108RZM010M](#) [157RZM016M](#) [686RZM016M](#)