

Marker card - SK 5,0 REEL P7,5 WH CUS - 0825131

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Marker card, can be ordered: By card, white, labeled according to customer specifications, Mounting type: Adhesive, for terminal block width: 7.5 mm, Lettering field: continuous x 5 mm

The figure shows a version of the article

Product Features

- Labeling service: Phoenix Contact can custom-label all TMT markers according to your requirements
- The SK labeling range offers self-adhesive marker strips for labeling products that do not have a marker groove
- The SK labeling range offers self-adhesive marker strips for labeling products that do not have a marker groove



Key Commercial Data

| | |
|--------------------------------------|----------|
| Packing unit | 1 pc |
| Weight per Piece (excluding packing) | 1.0 g |
| Custom tariff number | 39191080 |
| Country of origin | Germany |

Technical data

Dimensions

| | |
|-----------|------|
| Width (a) | 5 mm |
|-----------|------|

Ambient conditions

| | |
|---------------------------------|--|
| Ambient temperature (operation) | -40 °C ... 150 °C |
| Ambient temperature (assembly) | > 15 °C |
| Recommended storage conditions | 23 °C / 50% relative humidity. Storage in the original packaging is recommended prior to processing. |

General

| | |
|-------|----------------------------|
| Note | Marking up to max. 25-pos. |
| Color | white |

Marker card - SK 5,0 REEL P7,5 WH CUS - 0825131

Technical data

General

| | |
|---|-------------------------------------|
| Components | free from silicone and halogen |
| Material | Polyester |
| Wipe resistance | DIN EN 61010-1 (VDE 0411-1) |
| Number of marker strips | 10 |
| Adhesive | Acrylic |
| Printability | Thermal transfer |
| Device | 5146477 THERMOMARK ROLL |
| | 5146231 THERMOMARK X1.2 |
| Ink ribbon | 5145384 THERMOMARK-RIBBON 110 |
| Test for substances that would hinder coating with paint or varnish | VW PV 3.10.7:2005-02 |
| Result | Test passed |
| Test specification weathering-resistance | Following ISO 4892-2:2013-03 |
| Test duration | 96 h |
| Wipe resistance test result | Test passed |
| Salt spray test specification | DIN EN 60068-2-11:2000-02 |
| Test duration | 96 h |
| Salt spray testing result | Test passed |
| Alternating condensation climate with SO2 test specification | DIN 50018:2013-05 |
| Climate level | AHT 1.0 S |
| Cycles | 2 |
| Condensation test result | Test passed |
| Wipe resistance of test specification inscriptions | DIN EN 61010-1 (VDE 0411-1):2011-07 |
| Result | Test passed |
| Foil strength | 53 µm |
| Adhesive strength | 20 µm |
| Marking mounting type | Adhesive |

Standards and Regulations

| | |
|-----------------|-----------------------------|
| Wipe resistance | DIN EN 61010-1 (VDE 0411-1) |
|-----------------|-----------------------------|

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 24190219 |
| eCl@ss 4.1 | 24190219 |
| eCl@ss 5.0 | 27141137 |
| eCl@ss 5.1 | 27141137 |
| eCl@ss 6.0 | 27141137 |

Marker card - SK 5,0 REEL P7,5 WH CUS - 0825131

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 7.0 | 27141137 |
| eCl@ss 8.0 | 27141137 |
| eCl@ss 9.0 | 27141137 |

ETIM


| | |
|----------|----------|
| ETIM 3.0 | EC000761 |
| ETIM 4.0 | EC000761 |
| ETIM 5.0 | EC000761 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211811 |
| UNSPSC 7.0901 | 39121410 |
| UNSPSC 11 | 39121410 |
| UNSPSC 12.01 | 39121410 |
| UNSPSC 13.2 | 39121410 |

Drawings

Schematic diagram

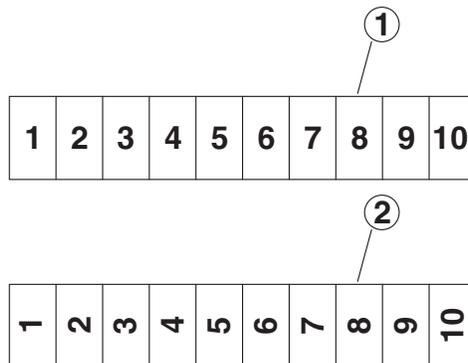

- ① Horizontal
- ② Vertical

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[0825131](#)