

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



End clamp, width: 6.2 mm, color: gray



## **Key Commercial Data**

Packing unit	1 pc
Minimum order quantity	100 pc
GTIN	4 017918 021559
Weight per Piece (excluding packing)	1.412 g
Custom tariff number	39269097
Country of origin	Poland

#### Technical data

### Dimensions

Height	11.4 mm
Length	22 mm
Width	6 mm

#### General

Material	PA
Coating	3.2 mm fixing hole
Color	gray

#### Standards and Regulations

Flammability rating according to UL 94	V2



### Classifications

#### eCl@ss

eCl@ss 4.0	27141199
eCl@ss 4.1	27141199
eCl@ss 5.0	27141135
eCl@ss 5.1	27141145
eCl@ss 6.0	27141135
eCl@ss 7.0	27141135
eCl@ss 8.0	27141135
eCl@ss 9.0	27141135

#### **ETIM**

ETIM 2.0	EC000761
ETIM 3.0	EC001041
ETIM 4.0	EC001041
ETIM 5.0	EC001041

#### UNSPSC

UNSPSC 6.01	30212109
UNSPSC 7.0901	39121708
UNSPSC 11	39121708
UNSPSC 12.01	39121708
UNSPSC 13.2	39121708

#### Accessories

Accessories

DIN rail

DIN rail, unperforated - NS 15 UNPERF 2000MM - 1401695



DIN rail, material: Steel, unperforated, height 5.5 mm, width 15 mm, length: 2 m



#### Accessories

DIN rail perforated - NS 15 PERF 2000MM - 1401682



DIN rail, material: steel galvanized and passivated with a thick layer, perforated, height 5.5 mm, width 15 mm, length: 2000 mm

DIN rail perforated - NS 15 AL PERF 2000MM - 1401763



DIN rail, material: Aluminum, perforated, height 5.5 mm, width 15 mm, length: 2 m


DIN rail perforated - NS 15 WH PERF 2000MM - 1204096




DIN rail, material: steel, perforated, height 5.5 mm, width 15 mm, length: 2 m

### Drawings



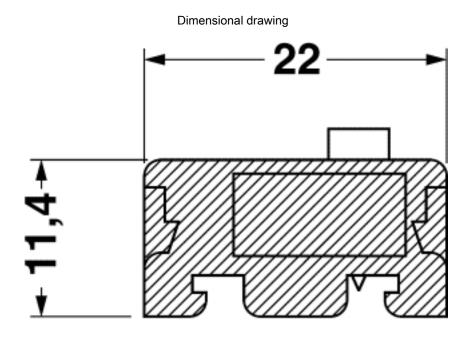

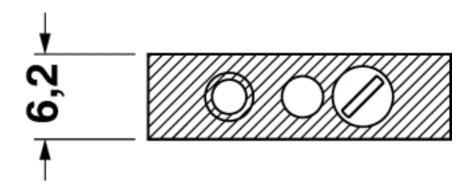

Phoenix Contact 2016 © - all rights reserved http://www.phoenixcontact.com

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Phoenix Contact: 1421633