


- 1 DOUBLE BAR POLARIZATION
- 2 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 3 POSTS: GOLD FLASH OVER PALLADIUM-NICKEL PLATE, .000015 MIN TOTAL ON THE MATING SURFACES, .000100 MIN TIN-LEAD PLATE ON THE SOLDER-TAILS, .000050 MIN NICKEL UNDERPLATE ON THE ENTIRE POST.  
-OR-  
.000015 MIN GOLD PLATE ON THE MATING SURFACES, .000100 MIN TIN-LEAD PLATE ON THE SOLDER-TAILS, .000050 MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
- 4 CENTER POLARIZATION SLOT
- 5 FOR 10 POSN ASSEMBLY, SLOT OMITTED WHERE INDICATED
- 6 NUMBER 1 POSITION.
- OPTIONAL AMP IDENTIFICATION NUMBER (DATE CODE). LOCATION APPROXIMATELY WHERE SHOWN.

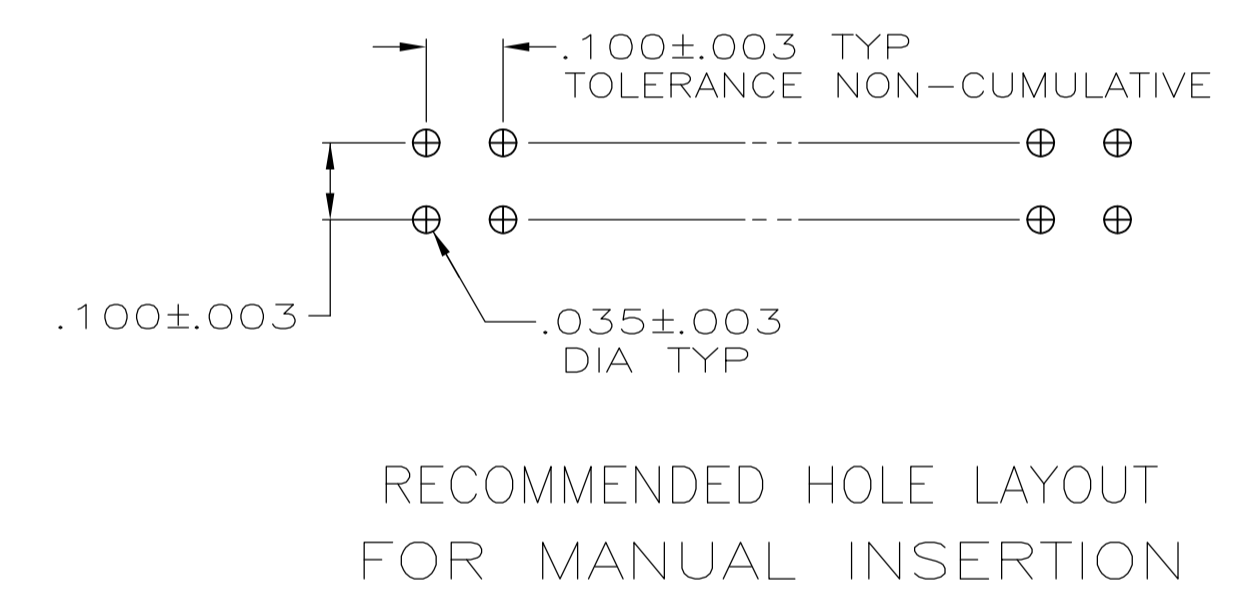

	1.500	1.100	11	24	1-103308-3
	3.300	2.900	29	60	1-103308-2
OBsolete	3.100	2.700	27	56	1-103308-1
	2.800	2.400	24	50	1-103308-0
OBsolete	2.500	2.100	21	44	103308-9
	2.300	1.900	19	40	103308-8
	2.000	1.600	16	34	103308-7
	1.600	1.200	12	26	103308-6
	1.300	.900	9	20	103308-5
OBsolete	1.200	.800	8	18	103308-4
	1.100	.700	7	16	103308-3
	1.000	.600	6	14	103308-2
	.800	.400	4	10	103308-1
	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN H. MOLL 8-27-87	CHK L. MEYER 9-03-87	APVD R. FEJDT 9-03-87	NAME
0 PLC ± -	1 PLC ± -	TE Connectivity HEADER ASSY, LOW PROFILE, AMP-LATCH PRODUCT SPEC 108-40018 APPLICATION SPEC			SIZE
2 PLC ± -	3 PLC ± .005				WEIGHT
4 PLC ± -	ANGLES ± -				SCALE
FINISH	FINISH				SHEET
MATERIAL: HOUSING: GLASS FILLED NYLON OR PBT, BLACK; POSTS: BRASS	FINISH	REVISIONS	DATE	DWN	APVD
		1	17MAR2011	CJV	SLB

CUSTOMER DRAWING SCALE 4:1 SHEET 1 OF 1 REV M

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[103308-7](#)