


P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-14-013486	17SEP14	SW	RZ
	B2	REVISE NOTES	27OCT2015	BB	JC
	B3	OBSOLETE PER ECR-16-006201	08JUL2016	DEH	JC

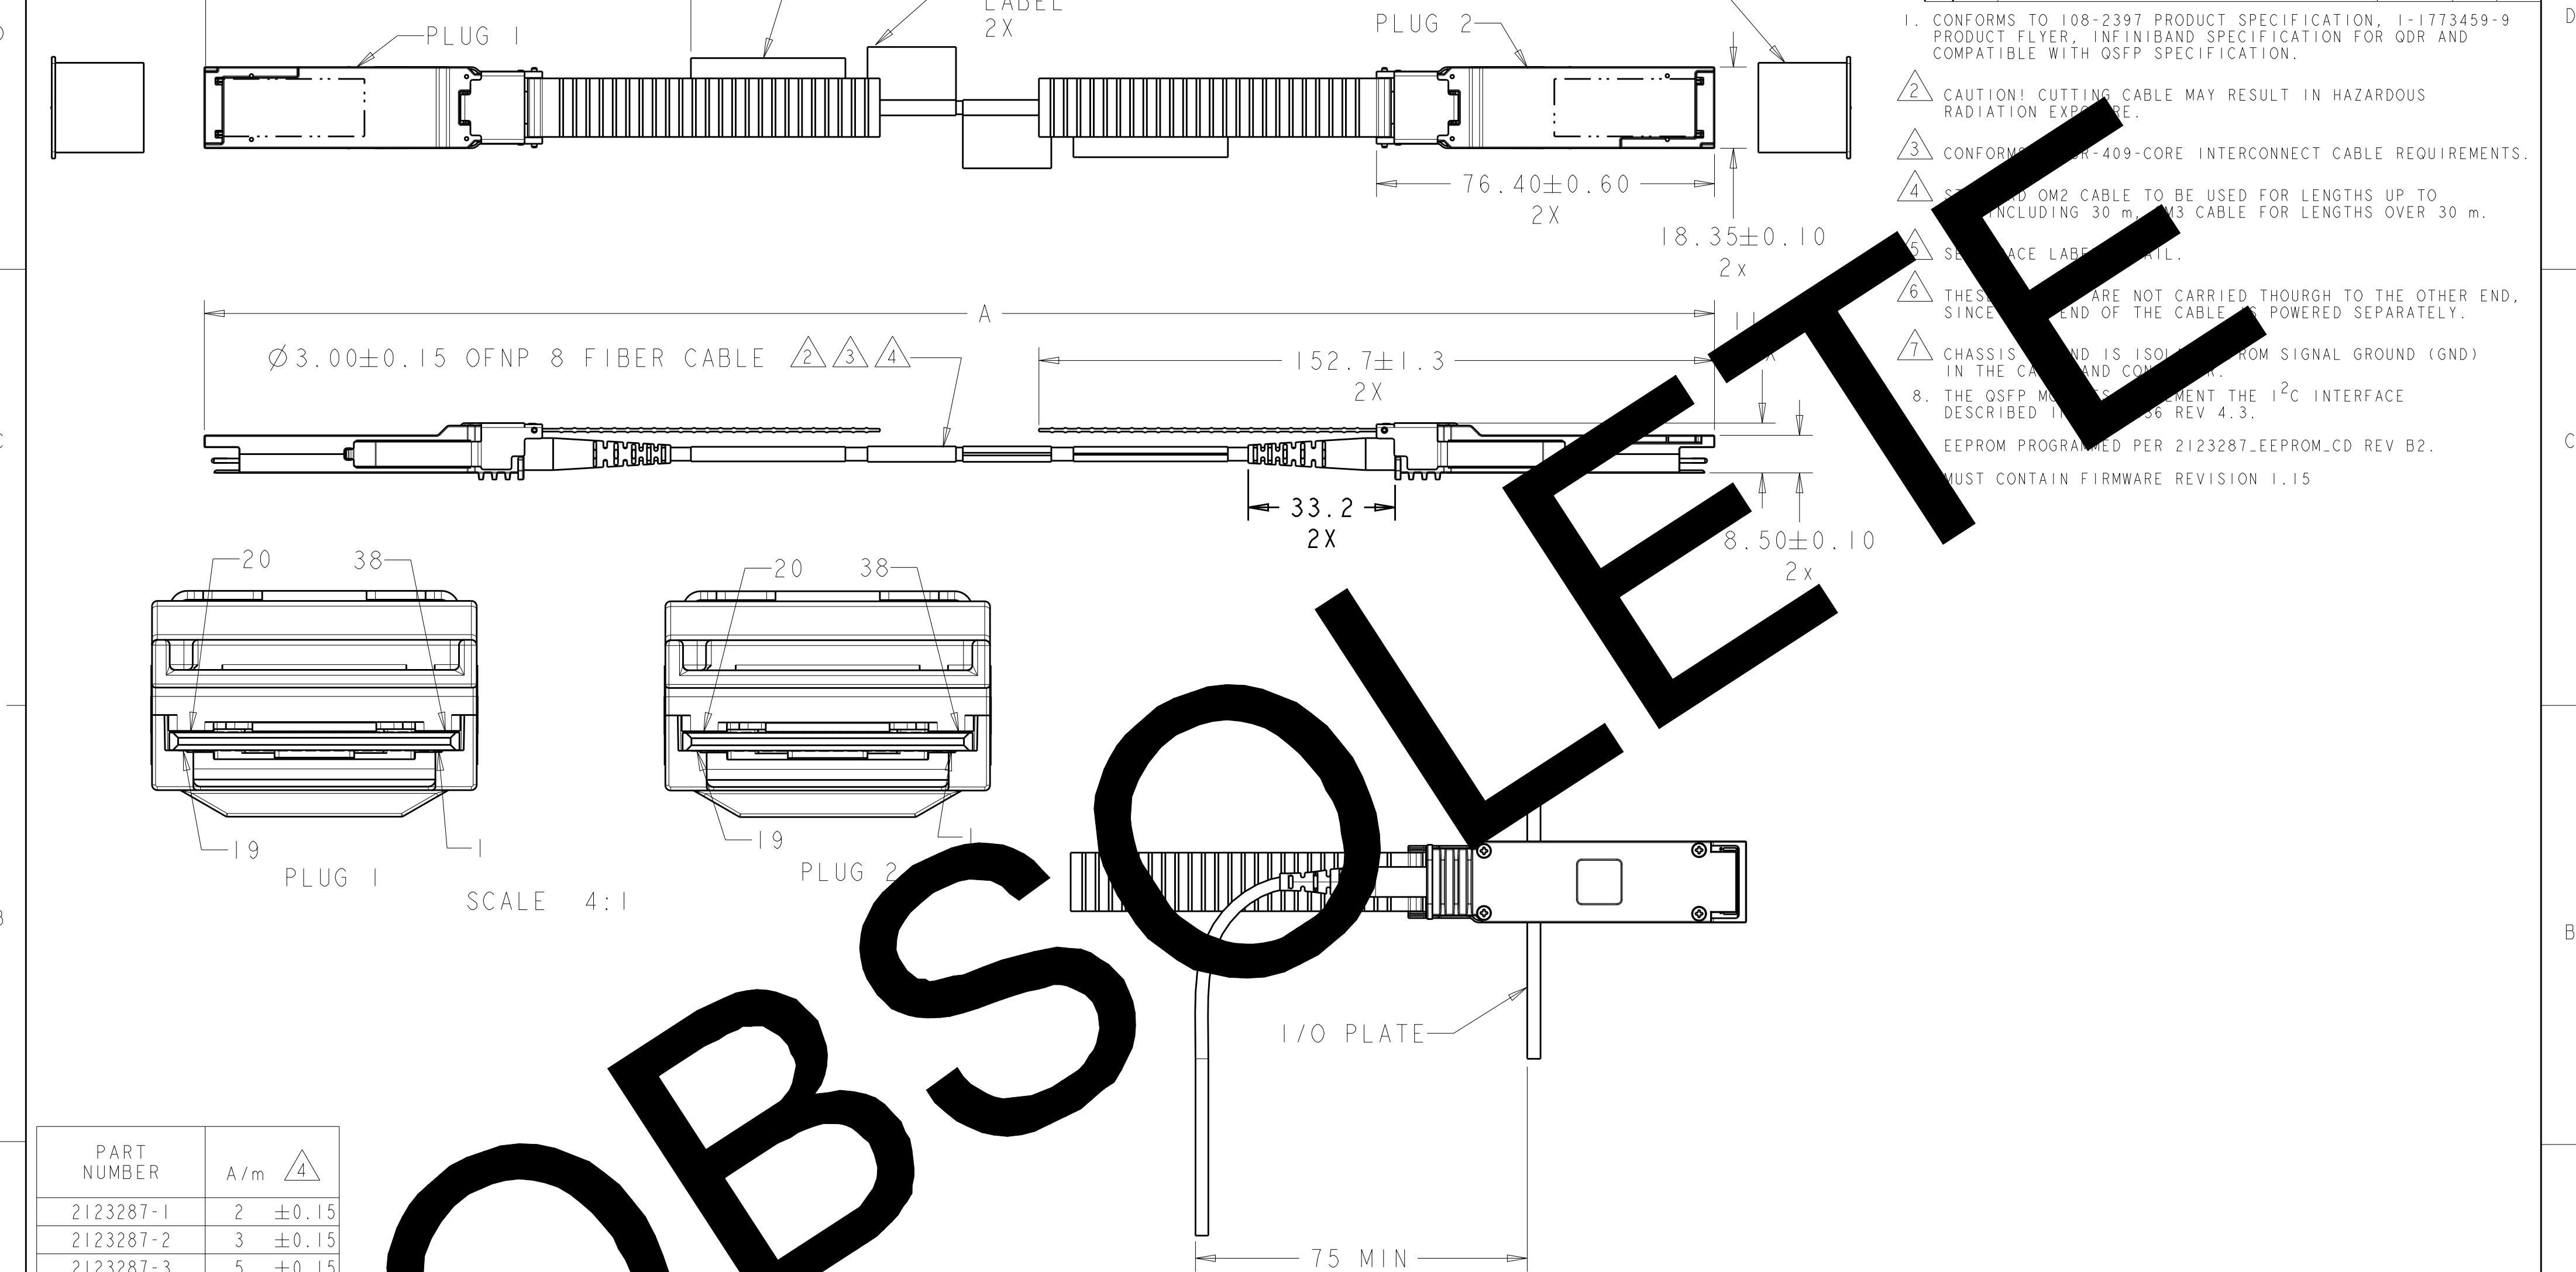

PART NUMBER	A/m	4
2123287-1	2	±0.15
2123287-2	3	±0.15
2123287-3	5	±0.15
2123287-4	10	±0.15
2123287-5	15	±0.15
2123287-6	20	±0.20
2123287-7	25	±0.25
2123287-8	30	±0.30
2123287-9	40	±0.40
1-2123287-0	50	±0.50
1-2123287-1	100	±1.00
1-2123287-2	1	±0.15
1-2123287-3	7	±0.15

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. CASTAGNA 27APR2010	TE Connectivity	
DIMENSIONS: mm		CHK R. FAIR 27APR2010	NAME PARALIGHT CABLE ASS'Y, 4X10 QSFP	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0.5 2 PLC ±0.13 3 PLC ±0.013 4 PLC ±0.0001 ANGLES ± FINISH		APVD R.D. MILLER 27APR2010	SIZE A200779	
MATERIAL		PRODUCT SPEC APPLICATION SPEC WEIGHT	DRAWING NO C-2123287	
CUSTOMER DRAWING		SCALE 1:1		SHEET 2
		REV B3		

LOC		DIST		REVISIONS					
CD		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
			-	SEE SHEET 1			-	-	-

QSFP	
PIN NO.	SIGNAL
1	GND 
2	Tx2n
3	Tx2p
4	GND 
5	Tx4n
6	Tx4p
7	GND 
8	ModSeIL
9	ResetL
10	Vcc Rx 
11	SCL
12	SDA
13	GND 
14	Rx3p
15	Rx3n
16	GND 
17	Rx1p
18	Rx1n
19	GND 
20	GND 
21	Rx2n
22	Rx2p
23	GND 
24	Rx4n
25	Rx4p
26	GND 
27	ModPrsL
28	Ln
29	Vcc Tx 
30	Vcc I
31	Mode
32	GND 
33	Rx1p
34	Tx1n
35	GND 
36	Tx1p
37	Tx1n
38	GND 

TE P/N-
TE-AC01- = PREFIX (LASER SAFETY ID)
X-2123287-X = TE 17 PART NUMBER

S/N:  S/N: BBBMMYYDDNNNNN
BAR CODE--
TE P/N-
TE-AC01-2123287-X
ASSEMBLED IN US OF
AND OTHER COMPONENTS


RHS Length: XXXm
REV.B2

SERIAL NUMBER BBBMMYYDDNNNNN
BBB = BUILDING NUMBER
MM = MANUFACTURING LOCATION
YY = TWO DIGIT YEAR
DDD = ORDINAL DATE
NNNNN = FIVE DIGIT SERIAL NUMBER

COUNTRY OF ORIGIN
WHEN MANUFACTURED
OUTSIDE THE US LABEL
MUST READ 'MADE IN XXXXX'.
-- WHERE XXXXX REPRESENTS
THE COUNTRY OF MANUFACTURING

-- LENGTH FROM PART NUMBER TABLE
-- TE LOGO & CUSTOMER PRINT REV

 TRACE LABEL INFORMATION
NOTE: LASER SAFETY CERTIFICATION IS BASED ON THE PREFIX
AND THAT TE IS THE ONLY MANUFACTURE VISIBLE ON
THE LABEL.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. CASTAGNA 27APR2010	 TE Connectivity			
DIMENSIONS: mm		CHK R. FAIR 27APR2010				
		APVD R.D. MILLER 27APR2010	NAME PARALIGHT CABLE ASS'Y, 4X10 QSFP			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±0.5 2 PLC ±0.13 3 PLC ±0.013 4 PLC ±0.0001 ANGLES ±- FINISH		PRODUCT SPEC - APPLICATION SPEC - WEIGHT -	SIZE A2			
MATERIAL -		CUSTOMER DRAWING		CAGE CODE 00779	DRAWING NO C-2123287	RESTRICTED TO -
				SCALE 1:1	SHEET 2	OF 2
				REV B3		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2123287-2](#)